

Ngalia Basin, Northern Territory
TEMPEST
Geophysical Survey

Acquisition and Processing Report
for
Element 92 Pty Ltd

Prepared by : S. Mulè
L. Stenning

Authorised for release by :
.....

Survey flown: November 2010

by



Fugro Airborne Surveys
435 Scarborough Beach Road, Osborne Park WA 6017, Australia
Tel: (61-8) 9273 6400 Fax: (61-8) 9273 6466

FAS JOB # 2146

CONTENTS

1. SURVEY OPERATIONS AND LOGISTICS.....	4
1.1 INTRODUCTION.....	4
1.2 SURVEY BASE	4
1.3 SURVEY PERSONNEL	4
1.4 AREA MAPS	5
1.5 GENERAL DISCLAIMER.....	6
2. SURVEY SPECIFICATIONS AND PARAMETERS.....	7
2.1 AREA CO-ORDINATES	7
2.2 SURVEY AREA PARAMETERS	10
2.3 JOB SAFETY PLAN.....	10
3. AIRCRAFT EQUIPMENT AND SPECIFICATIONS.....	11
3.1 AIRCRAFT.....	11
3.2 TEMPEST SYSTEM SPECIFICATIONS	11
3.2.1 EM Receiver and Logging Computer	11
3.2.2 TEMPEST Transmitter	12
3.2.3 TEMPEST 3-Axis Towed Bird Assembly	12
3.3 FASDAS SURVEY COMPUTER	12
3.3.1 Cesium Vapour Magnetometer Sensor	12
3.3.2 Magnetometer Processor Board	12
3.3.3 Fluxgate Magnetometer	12
3.3.4 GPS Receiver.....	12
3.3.5 Differential GPS Demodulator.....	12
3.4 NAVIGATION SYSTEM.....	13
3.5 ALTIMETER SYSTEM.....	13
3.5.1 Radar Altimeter	13
3.5.2 Laser Altimeter	13
3.5.3 Barometric Altimeter.....	13
3.6 VIDEO TRACKING SYSTEM.....	13
3.7 DATA RECORDED BY THE AIRBORNE ACQUISITION EQUIPMENT	13
4. GROUND DATA ACQUISITION EQUIPMENT AND SPECIFICATIONS	14
4.1 MAGNETIC BASE STATION.....	14
4.2 GPS BASE STATION	14
5. EM AND OTHER CALIBRATIONS AND MONITORING	15
5.1 GPS REPEAT POINT	15
5.2 TRANSMITTER-OFF.....	15
5.3 NOISE ADDITIVE.....	15
5.4 ZERO	15
5.5 SWOOPS	15
5.6 DYNAMIC MAGNETOMETER COMPENSATION.....	16
5.7 PARALLAX CHECKS	16
5.8 RADAR ALTIMETER CALIBRATION.....	16
5.9 HEADING ERROR CHECKS.....	16
6. DATA PROCESSING	17
6.1 FIELD DATA PROCESSING	17
6.1.1 Quality Control Specifications	17
6.1.2 In-Field Data Processing	17
6.2 FINAL DATA PROCESSING	17
6.2.1 Magnetics	17
6.2.2 Derived Topography.....	18
6.2.3 Electromagnetic Data Processing	19

6.2.4	Conductivity Depth Images (CDI).....	22
6.2.5	System Specifications for Modelling TEMPEST Data.....	22
6.2.6	Delivered Products	23
7.	REFERENCES	24
	APPENDIX I – WEEKLY ACQUISITION REPORTS	25
	APPENDIX II – LOCATED DATA FORMATS	27
	APPENDIX III – LIST OF ALL SUPPLIED DATA AND PRODUCTS.....	45

1. SURVEY OPERATIONS AND LOGISTICS

1.1 Introduction

Between the 9th of November 2010 and the 20th of November 2010, Fugro Airborne Surveys Pty. Ltd. (FAS) undertook an airborne TEMPEST electromagnetic and magnetic survey for Element 92 Pty Ltd, over the Ngalia Basin Project area in the Northern Territory. The survey consisted of 4 areas. Total coverage of the survey areas amounted to 2267 line kilometres flown in 9 flights. The survey was flown using a Shorts Skyvan SC-3-200 aircraft, registration VH-WGT owned and operated by FAS. This report summarises the procedures and equipment used by FAS in the acquisition, verification and processing of the airborne geophysical data.

1.2 Survey Base


The survey was based out of Vaughan Springs, Northern Territory. The base was moved to Tilmouth Well on the 19th November. The survey aircraft was operated from Vaughan Springs Airstrip and Tilmouth Well Airstrip with the aircraft fuel available on site. A temporary office was set up at Vaughan Springs Station, and later at Tilmouth Well Roadhouse, where all survey operations were run and the post-flight data verification was performed.

1.3 Survey Personnel

The following personnel were involved in this project:

Project Supervision - Acquisition	Bart Anderson
- Processing	Denis Cowey
On-site Crew Leader	Michael Githinji
Pilot/s	Peter Hiskins
System Operator/s	Michael Githinji
Aircraft Engineer	John Remington-Gurney
Field Data Processing	Shane Mulè
Office Data Processing	Shane Mulè

1.4 Area Maps

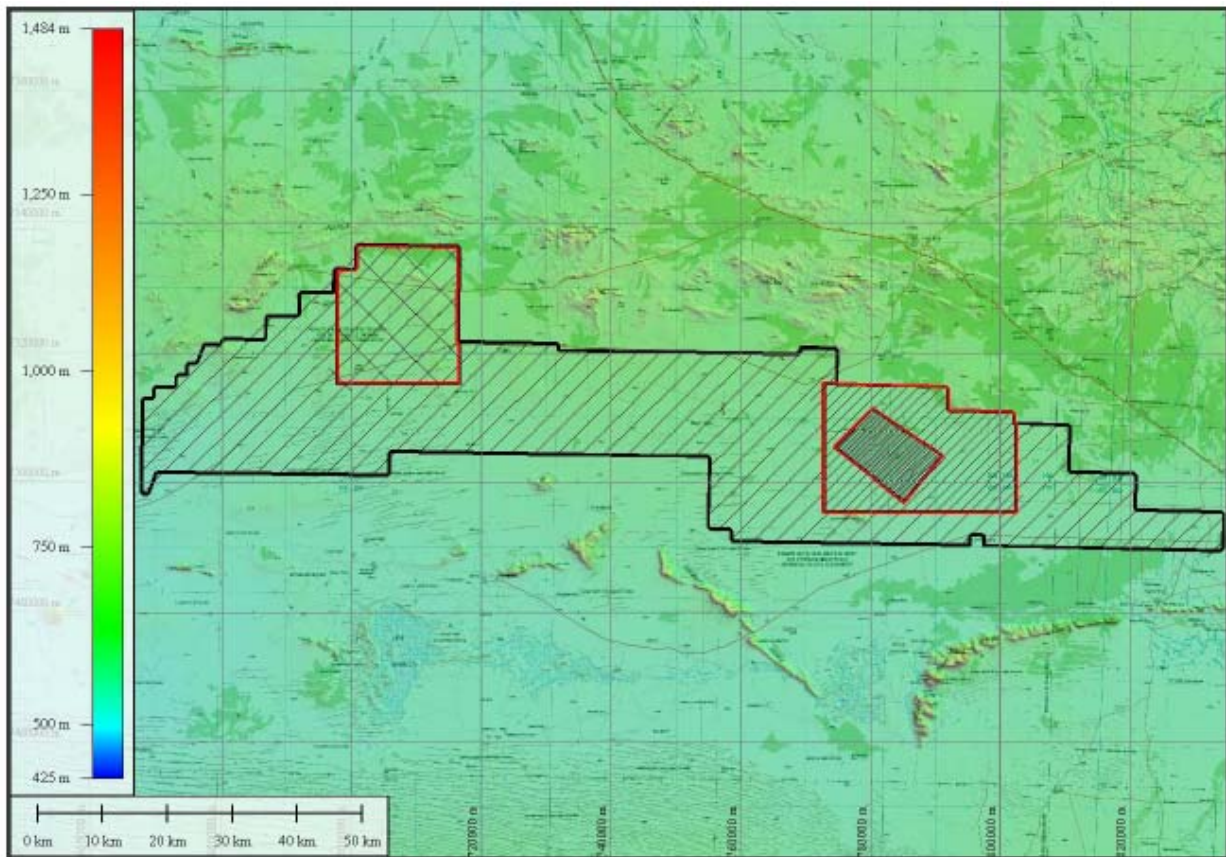

Ngalia Basin survey area
GDA94 MGA 52

1.5 General Disclaimer

It is Fugro Airborne Survey's understanding that the data and report provided to the client is to be used for the purpose agreed between the parties. That purpose was a significant factor in determining the scope and level of the Services being offered to the Client. Should the purpose for which the data and report is used change, the data and report may no longer be valid or appropriate and any further use of, or reliance upon, the data and report in those circumstances by the Client without Fugro Airborne Survey's review and advice shall be at the Client's own or sole risk.

The Services were performed by Fugro Airborne Survey exclusively for the purposes of the Client. Should the data and report be made available in whole or part to any third party, and such party relies thereon, that party does so wholly at its own and sole risk and Fugro Airborne Survey disclaims any liability to such party.

Where the Services have involved Fugro Airborne Survey's use of any information provided by the Client or third parties, upon which Fugro Airborne Survey was reasonably entitled to rely, then the Services are limited by the accuracy of such information. Fugro Airborne Survey is not liable for any inaccuracies (including any incompleteness) in the said information, save as otherwise provided in the terms of the contract between the Client and Fugro Airborne Survey.

2. SURVEY SPECIFICATIONS AND PARAMETERS

2.1 Area Co-ordinates

The survey areas were located within GDA94 MGA Zone 52S, Central Meridian = 129
(Note - Co-ordinates in GDA94/MGA Zone 52S)

Area 1

Area A	Area A cont.	Area A cont.
834120 7495061	668354 7498433	687016 7522266
834008 7489932	668084 7498436	687052 7525252
833796 7489730	667879 7498644	687262 7525456
797582 7490479	668031 7512551	691703 7525402
797608 7491602	668240 7512755	691709 7525402
797608 7491613	669247 7512744	691960 7525469
797541 7491862	669253 7512744	692143 7525651
797357 7492045	669503 7512811	692210 7525894
797118 7492111	669687 7512993	692247 7528881
795519 7492147	669754 7513237	692457 7529084
795508 7492147	669766 7514378	696900 7529029
795258 7492081	669976 7514582	696906 7529028
795074 7491898	671483 7514565	697156 7529095
795007 7491661	672698 7514551	697340 7529278
794980 7490532	672703 7514551	697407 7529520
794980 7490530	672954 7514618	697445 7532507
758808 7491186	673137 7514800	697655 7532711
758604 7491396	673204 7515044	700381 7532676
758623 7492538	673217 7516185	700387 7532676
758623 7492546	673427 7516389	700638 7532742
758556 7492796	674434 7516377	700821 7532925
758373 7492978	674440 7516377	700888 7533167
758131 7493045	674690 7516444	700927 7536151
755412 7493090	674873 7516627	701137 7536354
755208 7493300	674941 7516870	716184 7536156
755380 7503673	674953 7518011	716389 7535947
755380 7503681	675163 7518215	716211 7523233
755313 7503930	676036 7518205	716192 7521886
755130 7504112	676042 7518205	716192 7521879
754888 7504179	676292 7518272	716259 7521630
748530 7504283	676476 7518454	716443 7521447
731383 7504551	676507 7518519	716686 7521381
706167 7504910	677433 7520841	731425 7521167
706160 7504910	677638 7520974	731630 7520958
705909 7504844	679633 7520947	731626 7520698
705726 7504661	679640 7520947	731626 7520691
705659 7504419	679890 7521014	731693 7520441
705619 7501432	680074 7521196	731876 7520259
705409 7501228	680141 7521439	732119 7520192
670137 7501661	680143 7521643	748782 7519951
670131 7501661	680353 7521847	757553 7519821
669880 7501594	686509 7521774	757812 7519818
669697 7501412	686515 7521774	768731 7519661
669665 7501347	686765 7521840	768738 7519661
668559 7498566	686949 7522023	768989 7519727

Area A cont.

769172	7519910
769239	7520150
769243	7520349
769454	7520552
774340	7520466
774545	7520256
774458	7515421
774458	7515412
774526	7515163
774709	7514981
774950	7514914
791405	7514612
791608	7514402
791552	7511414
791552	7511404
791619	7511155
791802	7510973
792043	7510906
801631	7510721
801834	7510511
801812	7509369
801812	7509359
801879	7509110
802062	7508927
802303	7508861
810174	7508704
810378	7508493
810270	7503160
810242	7501811
810242	7501801
810309	7501552
810493	7501370
810733	7501303
820316	7501106
820519	7500895
820418	7496059
820418	7496049
820485	7495800
820668	7495617
820908	7495551
833917	7495272

Area 2, 3 and 4

Area B		Area C		Area D	
697782	7532709	774629	7515060	780257	7511148
700381	7532676	774709	7514981	790632	7504072
700387	7532676	774950	7514914	785071	7497330
700638	7532742	791405	7514612	774697	7505407
700821	7532925	791608	7514402		
700888	7533167	791552	7511414		
700927	7536151	791552	7511404		
701137	7536354	791619	7511155		
716184	7536156	791802	7510973		
716389	7535947	792043	7510906		
716211	7523233	801631	7510721		
716192	7521886	801834	7510511		
716192	7521879	801812	7509369		
716259	7521630	801812	7509359		
716443	7521447	801879	7509110		
716536	7521422	802062	7508927		
716536	7515347	802210	7508886		
697782	7515347	802210	7495752		
		772841	7495752		
		772841	7515060		

2.2 Survey Area Parameters

Job Number	-	2146
Survey Company	-	Fugro Airborne Surveys Pty Ltd
Date Flown	-	9 th November 2010 – 20 th November 2010
Client	-	Element 92 Pty Ltd
EM System	-	25 Hz TEMPEST
Navigation	-	Real-time differential GPS
Datum	-	GDA94
Projection	-	MGA Zone 52S
Project Name	-	Ngalia Basin, Northern Territory
Area Names	-	1, 2, 3 and 4
Nominal Terrain Clearance	-	100 m
Total Survey Line Kilometres	-	2267 km

Area	Traverse Line Spacing	Traverse Line Direction	Traverse Line Numbers	Line Kilometres
1	2560 m	045 – 225	10001– 10052	1364 km
2	5120 m	135 – 315	20001– 20006	81 km
3	1280 m	045 – 225	10029 - 10041 30001 – 30014	436 km
4	320 m	045 – 225	10032 – 10037 30004 – 30009 40001 – 40043	386 km

2.3 Job Safety Plan

A Job Safety Plan was prepared and implemented in accordance with the Fugro Airborne Surveys Occupational Safety & Health Management System.

3. AIRCRAFT EQUIPMENT AND SPECIFICATIONS

3.1 Aircraft

Manufacturer	-	Shorts Skyvan
Model	-	SC-3-200
Registration	-	VH-WGT
Ownership	-	Fugro Airborne Surveys Pty Ltd

3.2 TEMPEST System Specifications

Specifications of the TEMPEST Airborne EM System (Lane et al., 2000) are:

• Base frequency	-	25 Hz
• Transmitter area	-	186 m ²
• Transmitter turns	-	1
• Waveform	-	Square
• Duty cycle	-	50%
• Transmitter pulse width	-	10 ms
• Transmitter off-time	-	10 ms
• Peak current	-	300 A
• Peak moment	-	55800 Am ²
• Average moment	-	27900 Am ²
• Sample rate	-	75 kHz on X and Z
• Sample interval	-	13 microseconds
• Samples per half-cycle	-	1500
• System bandwidth	-	25 Hz to 37.5 kHz
• Flying height	-	100 m (subject to safety considerations)
• EM sensor	-	Towed bird with 3 component dB/dt coils
• Tx-Rx horizontal separation	-	115 m (nominal)
• Tx-Rx vertical separation	-	40 m (nominal)
• Stacked data output interval	-	200 ms (~12 m)
• Number of output windows	-	15
• Window centre times	-	13 µs to 16.2 ms
• Magnetometer	-	Stinger-mounted cesium vapour
• Magnetometer compensation	-	Fully digital
• Magnetometer output interval	-	200 ms (~12 m)
• Magnetometer resolution	-	0.001 nT
• Typical noise level	-	1.0 nT
• GPS cycle rate	-	1 second

3.2.1 EM Receiver and Logging Computer

The EM receiver computer was an EMFASDAS. The EM receiver computer executes a proprietary program for system control, timing, data acquisition and recording. Control, triggering and timing is provided to the TEMPEST transmitter and Digital Signal Processing (DSP) boards by the timing card, which ensures that all waveform generation and sampling is accomplished with high accuracy. The timing card is synchronised to the Global Positioning System (GPS) through the use of the Pulse Per Second (PPS) output from the system GPS card. Synchronisation is also provided to the magnetometer processor card for the purpose of accurate magnetic sampling with respect to the EM transmitter waveform.

The EM receiver computer displays information on the main screen during system calibrations and survey line acquisition to enable the airborne operator to assess the data quality and performance of the system.

3.2.2 TEMPEST Transmitter

The transmitted waveform is a square wave of alternating polarity, which is triggered directly from the EM receiver computer. The nominal transmitter base frequency was 25 Hz with a pulse width of 10ms (50 % duty cycle). Loop current waveform monitoring is provided by a current transformer located directly in the loop current path to allow for full logging of the waveform shape and amplitude, which is sampled by the EM receiver.

3.2.3 TEMPEST 3-Axis Towed Bird Assembly

The TEMPEST 3-axis towed bird assembly provides accurate low noise sampling of the X (horizontal in line), Y (horizontal transverse) and Z (vertical) components of the electromagnetic field. The receiver coils measure the time rate of change of the magnetic field (dB/dt). Signals from each axis are transferred to the aircraft through a tow cable specifically designed for its electrical and mechanical properties.

3.3 FASDAS Survey Computer

The Survey computer executes a proprietary program for acquisition and recording of location, magnetic and ancillary data. Data are presented both numerically and graphically in real time on the Video Graphics Array (VGA) Liquid Crystal Display (LCD) display, which provides an on-line display capability. The operator may alter the sensitivity of the displays on-line to assist in quality control. Selected EM data are transferred from the EM receiver computer to the SURVEY computer for quality control (QC) display.

3.3.1 Cesium Vapour Magnetometer Sensor

A cesium vapour magnetometer sensor is utilised on the aircraft and consists of the sensor head and cable, and the sensor electronics. The sensor head is housed at the end of a composite material tail stinger.

3.3.2 Magnetometer Processor Board

A FASDAS magnetometer processor board is used for de-coupling and processing the Larmor frequency output of the magnetometer sensor. The processor board interfaces with the survey computer, which initiates data sampling and transfer for precise sample intervals and also with the EM receiver computer to ensure that the magnetic samples remain synchronised with the EM system.

3.3.3 Fluxgate Magnetometer

A tail stinger mounted Bartington MAG-03MC three-axis fluxgate magnetometer is used to provide information on the attitude of the aircraft. This information is used for compensation of the measured magnetic total field.

3.3.4 GPS Receiver

A Novatel GPScard 951R is utilised for airborne positioning and navigation. Satellite range data are recorded for generating post processed differential solutions.

3.3.5 Differential GPS Demodulator

The OMNISTAR differential GPS service provides real time differential corrections.

3.4 Navigation System

A FASDAS Navigation Computer was used for real-time navigation. These computers load a pre-programmed flight plan from disk which contains boundary co-ordinates, line start and end co-ordinates, local co-ordinate system parameters, line spacing, and cross track definitions. The World Geodetic System 1984 (WGS84) latitude and longitude positional data received from the Novatel GPS card contained in the SURVEY computer is transformed to the local co-ordinate system for calculation of the cross track and distance to go values. This information, along with ground heading and ground speed, is displayed to the pilot numerically and graphically on a two line LCD display, and on an analogue Horizontal Strip Indicator (HSI). It is also presented on a LCD screen in conjunction with a pictorial representation of the survey area, survey lines, and ongoing flight path.

The Navigation computers are interlocked to the SURVEY computer for auto selection and verification of the line to be flown. The GPS information passed to the navigation computer is corrected using the received real time differential data from the OMNISTAR service, enabling the aircraft to fly as close to the intended track as possible.

3.5 Altimeter System

3.5.1 Radar Altimeter

Model:	Collins ALT 50 radio altimeter system
Sample interval:	0.2 second
Accuracy:	+/- 1.5 % of indicated altitude.

The Collins radio altimeter is a high quality instrument whose output is factory calibrated. It is fitted with a test function which checks the calibration of a terrain clearance of 100 feet, and altitudes which are multiples of 100 feet. The aircraft radio altitude is recorded onto digital tape as well as displayed on the aircraft chart recorder. The recorded value is the average of the altimeters output during the previous second.

3.5.2 Laser Altimeter

Model:	Optech 501SB (WGT)
Sample interval:	0.2 second
Accuracy:	± 0.05m at survey altitude

3.5.3 Barometric Altimeter

Output of a Digiquartz 215A-101 pressure transducer is used for calculating the barometric altitude of the aircraft. The atmospheric pressure is taken from a gimbal-mounted probe projecting 0.5 metres from the wing tip of the aircraft and fed to the transducer mounted in the aircraft wingtip.

3.6 Video Tracking System

The video file recorded by the digital video system is synchronised with the geophysical record by a digital fiducial display. It is also labelled with GPS latitude and longitude information and survey line number.

3.7 Data Recorded by the Airborne Acquisition Equipment

With the FASDAS acquisition system the raw EM data including fiducial, local time, X and Z axis sensor response, current monitor and bird auxiliary sensor output are recorded on the EM receiver computer as "*.raw" EM files. Logging to the files is continuous, however, a new *.raw EM file is created when the size of the previous one reaches 1Gb.

The FASDAS Survey computer records a continuous MSD file which contains all other ancillary data including magnetic, altimeter, GPS and analogue channels.

4. GROUND DATA ACQUISITION EQUIPMENT AND SPECIFICATIONS

4.1 Magnetic Base Station

A CF1 and a Scintrex ENVI magnetometer were used to measure the daily variations of the Earth's magnetic field. The base stations were established in an area of low gradient, away from cultural influences. The base stations were run continuously throughout the survey flying period with a sampling interval of 1 and 5 seconds respectively, at a sensitivity of 0.01 nT. The base station data were closely examined after each day's production flying to determine if any data had been acquired during periods of out-of-specification diurnal variation. The base stations were located approximately 80 m apart next to the apron at Vaughan Springs and Tilmouth Well Airstrip.

4.2 GPS Base Station

A GPS base logging station was set up at Vaughan Springs and Tilmouth Well Airstrip. The sensor was contained in the CF1 unit.

The GPS base system was comprised of a Novatel GPS PC card mounted in a portable IBM computer. The computer is connected to a mains UPS backup, with a reserve capacity of approximately 100 minutes, to ensure continuous data logging in the event of mains power interruptions.

The GPS base station position was calculated by logging data continuously at the base position over a period of approximately 24 hours. These data were then statistically averaged to obtain the position of the base station using GrafNav software.

Vaughan Springs

The calculated GPS base position was (in WGS84):

Lat: 22° 48' 32.97914" S
Long: 132° 35' 55.87217" E
Height: 588.988 m. (WGS84 Ellipsoidal Height)

Tilmouth Well

The calculated GPS base position was (in WGS84):

Lat: 22° 17' 56.73616" S
Long: 130° 50' 56.57814" E
Height: 658.046 m. (WGS84 Ellipsoidal Height)

5. EM AND OTHER CALIBRATIONS AND MONITORING

At the beginning and end of each individual survey flight, the EM system is checked for background noise levels and performance. All of these checks are conducted at a nominal terrain clearance of 600 m (2000 ft) to eliminate ground response.

These checks include:-

5.1 GPS Repeat Point

Where possible, the aircraft is parked in the same position after every flight and the GPS position recorded pre and post flight, to allow for checks on GPS quality and repeatability. *Note: FFFF is the flight number and PP is the attempt number.*

Pre-Flight GPS Repeat Point: **Line 505FFFFPP**
Post-Flight GPS Repeat Point: **Line 605FFFFPP**

5.2 Transmitter-off

These lines are recorded in straight and level flight with the system in standard survey geometry, with the transmitter turned off and bird response turned on to observe ambient noise and to check for noise in the receiver system (bird/coils → tow cable → winch → computer). *Note: FFFF is the flight number and PP is the attempt number.*

Pre-Flight Transmitter-off: **Line 900FFFFPP**
Post-Flight Transmitter-off: **Line 906FFFFPP**

5.3 Noise Additive

These lines are recorded in straight and level flight with the system in standard survey geometry, with the transmitter on and the bird response turned off at the tow cable winch. This is to check the noise contribution from the acquisition system and is used in deconvolution of survey line data. *Note: FFFF is the flight number and PP is the attempt number.*

Pre-Flight Noise Additive: **Line 901FFFFPP**
Post-Flight Transmitter-off: **Line 904FFFFPP**

5.4 Zero

These lines are recorded in straight and level flight with the system in standard survey configuration with transmitter and receiver turned on. This is used to determine the system's response in the absence of ground signal and is used to determine a standard waveform for deconvolution of survey lines. *Note: FFFF is the flight number and PP is the attempt number.*

Additionally, through all these calibrations the airborne operator can assess the system and ambient noise levels.

Pre-Flight Zero: **Line 902FFFFPP**
Post-Flight Zero: **Line 905FFFFPP**

5.5 Swoops

This line is recorded immediately after the pre-flight zero. During this manoeuvre the pilot conducts a series of 'swoop' manoeuvres (pitch up/pitch down) over approximately 30-40 seconds to vary the position of the towed sensor relative to the aircraft. The EM data are monitored by the airborne operator to confirm correct operation of the system during the manoeuvre. This data is used to determine coefficients used in the processing to compensate for such variations in the survey data. *Note: FFFF is the flight number and PP is the attempt number.*

Pre-Flight Swoop: **Line 903FFFFPP**

5.6 Dynamic Magnetometer Compensation

To limit aircraft manoeuvre effects on the magnetic data that can be of the same spatial wavelength as the signals from geological sources, compensation calibration lines are flown in a low magnetic gradient area close to the survey. This involves flying a series of tests on the survey line heading and approximately 15 degrees either side to accommodate small heading variations whilst flying survey lines. The data for each heading consists of a series of aircraft manoeuvres, including pitches, rolls and yaws. This is done to artificially create the most extreme possible attitude the aircraft may encounter whilst on survey. Data from these lines are used to derive compensation coefficients for removing magnetic noise induced by the aircraft's attitude in the naturally occurring magnetic field.

Compensation data were acquired on the dates below.

9th November 2010

5.7 Parallax Checks

Due to the relative positions of the EM towed bird and the magnetometer instruments on the aircraft and to processing / recording time lags, raw readings from each vary in position. To correct for this and to align selected anomaly features on lines flown in opposite directions, magnetics, EM data and the altimeters are 'parallaxed' with respect to the position information. System parallax is checked occasionally or following any major changes in the aircraft system, which are likely to affect the parallax values.

Variable	Parallax Value
Magnetics	0.2 s
GPS	0 s
Radar Altimeter	0 s
Laser Altimeter	0 s
EM - X	- 6.6 s
EM – Z	- 6.8 s

5.8 Radar Altimeter Calibration

The radar altimeter is checked for accuracy and linearity every 12 months or when any change in a key system component requires this procedure to be carried out. This calibration allows the radar altimeter data to be compared and assessed with other height data (GPS and barometric) to confirm the accuracy of the radar altimeter over its operating range.

Absolute radar and barometric altimeter calibration was carried out over water at Mandurah, Western Australia, and was successful in calibrating the radar altimeter to information provided by the GPS and barometer instrument. Calibration factors were as expected. The calibration procedure also provides parallax information required for positional correction of the radar and GPS altimeters.

5.9 Heading Error Checks

Historically, heading error checks have been part of the aeromagnetic data acquisition procedure but they are no longer used. Fugro Airborne Surveys now calculates these effects using the aircraft magnetic compensation system and specially developed software. The precision to which these effects are now calculated and corrected for is far in excess of the manual methods used in the past.

6. DATA PROCESSING

6.1 Field Data Processing

6.1.1 Quality Control Specifications

6.1.1.1 Navigation Tolerance

The re-flight specifications applied for the duration of the survey were:

Electronic Navigation - absence of electronic navigation data (e.g. GPS base station fails).

Flight Path - where the flightpath deviates from the flightplan by more than 50% of the nominal line spacing for more than 5 kilometres or where lines cross. The line spacing measurements to be used in determining such re-flights will be made from the field flight path recovery

Altitude - terrain clearance continuously exceeds the nominal terrain clearance by plus or minus 30 m over a distance of 5 km or more unless to do so would, in the sole opinion of the pilot, jeopardise the safety of the aircraft or the crew or the equipment or would be in contravention of the Civil Aviation Safety Authority regulation such as those pertaining to built up areas.

6.1.1.2 Magnetism Noise and Diurnal Tolerance

The re-flight specifications applied for the duration of the survey were:

Magnetic Diurnal - where the magnetometer base station data exceeds a 10 nT change in 10 minutes.

6.1.1.3 Electromagnetic Data

The quality control checks on the electromagnetic data were:

Noise - where RMS noise in the last channel of the EM data exceeds 0.1 fT over 3 km for B-field (assessed in a resistive region) or where FAS believes an important anomaly is rendered un-interpretable.

Sferics – where sferic activity renders a potential anomaly un-interpretable.

6.1.2 In-Field Data Processing

Following acquisition, multiple copies of the EM data are made onto DVDs or CDs. The EM, location, magnetic and ancillary data are then processed at the field base to the point that the quality of the data from each flight can be fully assessed. Copies of the raw and processed data are then transferred to Perth for final data processing. A more comprehensive statement of EM data processing is given in section 6.2.3.

6.2 Final Data Processing

6.2.1 Magnetism

Magnetic data were compensated for aircraft manoeuvre noise using coefficients derived from the appropriate compensation flight. Base station data is edited so that all significant spikes, level shifts and null data are eliminated.

A diurnal base value was then added.

Area	Base Value
------	------------

All Areas	52632 nT
-----------	----------

A lag was applied to synchronise the magnetic data with the navigation data.

The International Geomagnetic Reference Field (IGRF) 2010 model (updated for secular variation) was removed from the levelled total field magnetics. An IGRF base value was then added to the data.

Area	Base Value	Updated Model
All Areas	52597 nT	9/11/2010

Where appropriate the magnetic data was tie line levelled. A FAS proprietary microlevelling process was then applied in order to more subtly level the data.

6.2.2 Derived Topography

Aircraft navigation whilst in survey mode is via real time differential GPS, obtained by combining broadcast differential corrections with on-board GPS measurements. Terrain clearance is measured with a laser altimeter.

The ground elevation, relative to the WGS84 spheroid used by GPS receiver units, is obtained by finding the difference between the terrain clearance (from the final processed and edited laser altimeter) and the aircraft GPS antenna altitude above the ellipsoid (GPS height derived from post-processing of the DGPS data using the field base station data), and taking into account that the laser altimeter is mounted 2.3 metres below the GPS antenna.

The digital elevation model derived from this survey can be expected to have an absolute accuracy of +/- several metres in areas of low to moderate topographic relief. Sources of error include uncertainty in the height of the GPS base station, variations in the laser altimeter characteristics over ground of varying surface characteristics (ie. false and non-returns are more prevalent over dense vegetation and water, respectively), and the finite footprint of the laser altimeter.

Following this, where appropriate, tie line and micro-levelling was applied in order to more subtly level the data. The algorithms are FAS proprietary operations used to remove the small across-line corrugations that may appear in the gridded data. The micro-levelling process attempts to de-corrugate the data without destroying the data's integrity. This is achieved by confining the changes to very small values and applying them as a correction to the along-line data.

An N-Value is then subtracted to correct the final data to the Australian Height Datum (AHD).

The accuracy of the elevation calculation is directly dependent on the accuracy of the two input parameters, laser altitude and GPS altitude. The GPS altitude value is dependent on the number of available satellites, plus the accuracy of the averaged GPS base position. Although post-processing of GPS data will yield X and Y accuracies in the order of 0.5 metres, the accuracy of the altitude value is usually much less, but generally still within 1-2 metres. Further inaccuracies may be introduced during the interpolation and gridding process as only 1 out of every 5 points across-line is real data. Furthermore, along line obstructions may cause the pilot to veer laterally and so data interpolated between lines may vary significantly from real topography, and do not show artificial vertical obstructions.

Because of the inherent inaccuracies of this method, no guarantee is made or implied that the information displayed is a true representation of the height above sea level. Although this product may be of some use as a general reference, **THIS PRODUCT MUST NOT BE USED FOR NAVIGATION PURPOSES.**

6.2.3 Electromagnetic Data Processing

Details of the pre-processing applied to TEMPEST data can be found in Lane et al. (2000).

6.2.3.1 Standard EM Processing

Calibration

High altitude calibration data are used to characterise the system response in the absence of any ground response.

Cleaning and Stacking

Routines to suppress sferic noise, powerline noise, VLF noise, coil motion noise (collectively termed “cleaning”) and to stack the data are applied to the survey line data. Output from the stacking filter is drawn at 0.2 second intervals. The stacked data are saved to file as an internal data management practice.

Deconvolution and Binning

The survey height stacked data are deconvolved using the high altitude reference waveform. The effect of currents in the transmitter loop and airframe (“primary”) are then removed, leaving a “pure” ground response. The deconvolved ground response data are then transformed to B-field response for a perfect 100% duty cycle square wave. Finally, the evenly spaced samples are binned into a number of windows.

Table of TEMPEST window information for 25Hz base frequency

Window #	Start sample	End sample	No of samples	start time (s)	End time (s)	centre time (s)	centre time (ms)
1	1	2	2	0.000007	0.000020	0.000013	0.013
2	3	4	2	0.000033	0.000047	0.000040	0.040
3	5	6	2	0.000060	0.000073	0.000067	0.067
4	7	10	4	0.000087	0.000127	0.000107	0.107
5	11	16	6	0.000140	0.000207	0.000173	0.173
6	17	26	10	0.000220	0.000340	0.000280	0.280
7	27	42	16	0.000353	0.000553	0.000453	0.453
8	43	66	24	0.000567	0.000873	0.000720	0.720
9	67	102	36	0.000887	0.001353	0.001120	1.120
10	103	158	56	0.001367	0.002100	0.001733	1.733
11	159	246	88	0.002113	0.003273	0.002693	2.693
12	247	384	138	0.003287	0.005113	0.004200	4.200
13	385	600	216	0.005127	0.007993	0.006560	6.560
14	601	930	330	0.008007	0.012393	0.010200	10.200
15	931	1500	570	0.012407	0.019993	0.016200	16.200

The data are reviewed after windowing. Any decisions involving re-flights due to AEM factors are made at this point.

Raw and Final EM Data

The “raw” or “uncorrected” EM amplitudes reflect, not only the variations in ground conductivity, but the variations in geometry of the various parts of the EM measurements (i.e. transmitter loop pitch, transmitter loop roll, transmitter loop terrain clearance, transmitter loop to receiver coil horizontal longitudinal separation, transmitter loop to receiver coil horizontal transverse separation, and transmitter loop to receiver coil vertical separation) during the survey. For example, the largest influence on the early time EM amplitude is the terrain clearance of the transmitter loop. The larger the terrain clearance, the smaller the amplitude. Later window times (larger window number) show diminished variations due to terrain clearance.

“Final” or “geometry-corrected” located data are produced for optimum presentation of the EM amplitude data in image format (e.g. window amplitude images, principal component analysis images derived from the window amplitudes (Green, 1998b)). Between “raw” and “final” states, the ground response data undergo an approximate correction to produce data from a nominated standard geometry. A dipole-image method (Green, 1998a) is used to adjust the data to the response that would be expected at a standard terrain clearance (100m), standard transmitter loop pitch and roll (zero degrees), and a standard transmitter loop to receiver coil geometry (115m behind and 40m below the aircraft). These variables have been set to their respective standard values in the “final” located data (whereas the “raw” located data file contains the variable field data). Zero parallax is applied to transmitter loop pitch, roll, terrain clearance, X component EM and Z component EM data prior to geometry correction. Over extremely conductive ground (e.g. > 100 S conductance), the estimates for transmitter loop to receiver coil separation determined from the primary field coupling factors may be in error at the metre scale due to uncertainty in the estimation of the primary field. This will influence the accuracy of very early time window amplitude information in the “geometry-corrected” located data. Receiver coil pitch has a significant effect on early time Z component response and late time X component response (Green and Lin, 1996). Receiver coil roll impacts early time Z component response.

Levelling

Limited range micro-levelling may be applied to the final window amplitudes for presentation purposes, principally for multi-flight surveys or when isolated re-flight lines are present.

6.2.3.2 Factors and Corrections

Geometric Factor

The geometric factor gives the ratio of the strength of the primary field coupling between the transmitter loop and the receiver coil at each observation relative to the coupling observed at high altitude during acquisition of reference waveform data. Variations in this factor indicate a change in the attitude and/or relative separation of the transmitter loop and the receiver coil.

Transmitter-Receiver Geometry

Transmitter to receiver geometry values for each observation are derived from the high altitude reference waveforms and knowledge of the system characteristics. These data are available in the located data (see section 6.2.6.1 for “standardised” values)

GPS Antenna, Laser Altimeter and Transmitter Loop Offset Corrections

The transmitter loop was mounted 0.1m above the GPS antenna on the aircraft. The GPS antenna is 3.3m above the belly of the aircraft. The laser altimeter sensor is mounted in the belly of the aircraft. Therefore a total of 3.05m (-0.25m + 3.3m) was added to the laser altimeter data to determine the transmitter loop height above the ground.

Transmitter Loop Pitch and Roll Correction

Measured vertical gyro aircraft pitch and roll attitude measurements are converted to transmitter loop pitch and roll by adding 0.45 degrees for pitch and 0.6 degrees for roll. Nose up is positive for pitch, and left wing up is positive for roll.

6.2.3.3 Primary Sources of EM Noise

A number of “monitor” values are calculated during processing to assist with interpretation. They generally represent quantities that have been removed as far as is practical from the data, but may still be present in trace amounts. These are more significant for interpretation of discrete conductors than for general mapping applications.

Sferic Monitor

Sferics are the electromagnetic signals associated with lightning activity. These signals travel large distances around the Earth. Background levels of sferics are recorded at all times from lightning activity in tropical areas of the world (eg tropical parts of Asia, South America and Africa). Additional higher amplitude signals are produced by “local” lightning activity (ie at distances of kilometres to hundreds of kilometres).

The sferic monitor is the sum of the absolute differences brought about by the sferic filter operations, summed over 0.2 second intervals, normalised by the receiver effective area. It is given in units of $\mu\text{V}/\text{sq.m}/0.2\text{s}$. Many sferics have a characteristic form that is well illustrated by figure 2 in Garner and Thiel (2000). The high frequency, initial part of a sferic event can be detected and filtered more easily than the later, low frequency portion. The sferic monitor indicates where at least the high frequency portion of a sferic has been successfully removed, but it is quite possible that lower frequency elements of the sferic event may have eluded detection, passing through to the window amplitude data. Thus, discrete anomalies coincident with sferic activity as indicated by the sferic monitor should be down-weighted relative to features clear of any sign of sferic activity.

Low Frequency Monitor

The Low Frequency Monitor (LFM) makes use of amplitudes at frequencies below the base frequency which are present in the streamed data to estimate the amplitude of coil motion (Earth magnetic field) noise at the base frequency in $\log_{10}(\text{pV}/\sqrt{\text{Hz}}/\text{sq.m})$. The coil motion noise below the base frequency is rejected through the use of tapered stacking, but the coil motion noise at the base frequency itself is not easily removed. A sharp spike in the LFM can be an indicator of a coil motion event (eg the bird passing through extremely turbulent air). Note that the LFM will also respond to sferic events with an appreciable low frequency (sub-base frequency) component. This situation can be inferred when both the LFM and sferic monitors show a discrete kick.

Powerline Monitor

The powerline monitor gives the amplitude of the received signal at the powerline frequency (50 or 60 Hz) in $\log_{10}(\text{pV}/\sqrt{\text{Hz}}/\text{sq.m})$. Careful selection of the base frequency (such that the powerline frequency is an even harmonic of the base frequency) and tapered stacking combine to strongly attenuate powerline signals. When passing directly over a powerline, the rapid lateral variations in the strength and direction of the magnetic fields associated with the powerline can result in imperfect cancellation of the powerline response during stacking. Some powerline-related interference can manifest itself in a form that is similar to the response of a discrete conductor. The exact form of the monitor profile over a powerline depends on the line direction, powerline direction, powerline current, and receiver component, but the monitor will show a general increase in amplitude approaching the powerline.

Grids (or images) of the powerline monitor reveal the location of the transmission lines. Note that the X component (horizontal receiver coil axis parallel with the flight line direction) does not register any response from powerlines parallel to the flight line direction since the magnetic fields associated with powerlines only vary in a direction perpendicular to the powerline. Note also that the Z component (vertical receiver coil axis) shows a narrow low directly over the powerline where the magnetic fields are purely horizontal.

Very Low Frequency Monitors

Wide area VLF communication signals in the 15 to 25 kHz frequency band are monitored by the TEMPEST system. In the Australian region, signals at 18.2 kHz, 19.8 kHz, 21.4 kHz and 22.2 kHz are monitored as the amplitude of the received signal at these frequencies in $\log_{10}(\text{pV}/\sqrt{\text{Hz}}/\text{sq.m})$. The strongest signal comes from North West Cape (19.8 kHz). The signal at 18.2 kHz is often observed to pulse in a regular sequence. These strong narrow band signals have some impact on the high frequency response of the system, but they are strongly attenuated by selection of the base frequency and tapered stacking. The VLF transmissions are strongest in amplitude, in the horizontal direction at right angles to the direction to the VLF transmitter. This directional dependence enables the VLF monitors to be used to indicate the receiver coil attitude.

6.2.3.4 Other Sources of EM Noise

Man-made periodic discharges

If an image of the Z component sferic monitor shows the presence of spatially coherent events, then pulsed cultural interference would be strongly suspected. Since sferic signals are much stronger in the horizontal plane than in the vertical plane, few sferics of significant amplitude are recorded in Z component data. In contrast, evidence of cultural interference is generally swamped by true sferics in X component sferic monitor images.

Electric fences are the most common source of pulsed cultural interference. Periodic discharges (eg every second or so) into a large wire loop (fence) produce very large spikes in raw data. These are attenuated to a large degree by the sferic filter, but a residual artefact can still be present in the processed data.

Coil motion / Earth field noise

A change in coupling between the receiver coil and the ambient magnetic field will induce a voltage in the receiver coil. This noise is referred to as coil motion or Earth field noise. Receiver coils in the towed bird are suspended in a fashion that attempts to keep this noise below the noise floor at frequencies equal to and above the base frequency of the system. Severe turbulence, however, can result in 'coil knock events' that introduce noise into the processed data.

Grounded metal objects

Grounded extensive metal objects such as pipelines and rail lines can qualify as conductors and may produce a response that is visible in processed data. Grounded metal objects produce a response similar to shallow, highly conductive, steeply dipping conductors. These objects can sometimes be identified from good quality topographic maps, from aerial photographs, by viewing the tracking video, from their unusual spatial distribution (ie often a series of linear segments) and in some circumstances from their effect on the powerline monitor. A powerline running close to a long metal object will induce a 50 Hz response in the object.

6.2.4 Conductivity Depth Images (CDI)

CDI conductivity sections for TEMPEST data were calculated using EMFlow and then modified to reflect the finite depth of investigation using an in-house routine, *Sigtime*.

The *Sigtime* routine removes many of the spurious conductive features that appear at depth as a result of fitting long time constant exponential decays to very small amplitude features in the late times. For each observation, the time when the response falls below a signal threshold amplitude is determined. This time is transformed into a diffusion depth with reference to the conductivity values determined for that observation. Anomalous conductivity values below this depth are replaced by background values or set to undefined, reflecting the uncertainty in their origin. The settings and options applied are indicated in the appropriate header files for *Sigtime* output. This procedure is different to that which would be obtained by filtering conductivity values using either a constant time or constant depth across the entire line.

The "final" X and Z component EM data were input into version 5.10 of EMFlow to calculate Conductivity Depth Images (CDI). Conductivity values were calculated at each point then run through *Sigtime*.

EMFlow was developed within the CRC-AMET through AMIRA research projects (Macnae et al, 1998, Macnae and Zonghou, 1998, Stolz and Macnae, 1998). The software has been commercialised by Encom Technology Pty Ltd. Examples of TEMPEST conductivity data can be seen in Lane et al. (2000), Lane et al. (1999), and Lane and Pracillio (2000).

Conductivity values were calculated to a depth of 500 m below surface at each point, using a depth increment of 5 m and a conductivity range of 0.1-100mS/m.

6.2.5 System Specifications for Modelling TEMPEST Data

Differences between the specifications for the acquisition system, and those of the virtual system for which processed results are given, must be kept in mind when forward modelling, transforming or inverting TEMPEST data.

Acquisition is carried out with a 50% duty cycle square transmitter current waveform and dB/dt sensors.

During processing, TEMPEST EM data are transformed to the response that would be obtained with a B-field sensor for a 100% duty cycle square waveform at the base frequency, involving a 1A change in current (from -0.5A to +0.5A to -0.5A) in a 1sq.m transmitter. Data are given in units of femtotesla (fT = 10^{-15} Tesla). It is this configuration, rather than the actual acquisition configuration, which must be specified when modelling TEMPEST data.

Window timing information is given above (see section 6.2.3).

6.2.5.1 Standard Height and Geometry

The “final” EM data have been standardised through an approximate transformation to a standard transmitter loop terrain clearance, transmitter loop pitch and roll of zero degrees, and a fixed transmitter loop to receiver coil geometry (roughly equal to the average “raw” geometry values). Transmitter loop pitch, transmitter loop roll and transmitter loop terrain clearance values for each observation have been modified to reflect the standard values. Hence, the “final” (fixed) geometry values should be used if modelling with the final X- and Z-component amplitude data - the following table summarises the values used to correct the transmitter height/pitch/roll/geometry to.

Table of values used to standardise transmitter loop height, pitch, roll and geometry

Variable	Standardised value
Transmitter loop pitch	0 degrees
Transmitter loop roll	0 degrees
Transmitter loop terrain clearance	100 metres
Transmitter loop – to – receiver coil geometry	115 m behind and 40 m below the aircraft

6.2.5.2 Parallax

The located data files utilise the following parallax values :-

- magnetics = 0.2 fiducials (1 observations from the zero parallax position),
- radar altimeter = 0 fiducials (0 observations from the zero parallax position),
- EM X-component = -6.6 fiducials (33 observation from the zero parallax position),
- EM Z-component = -6.8 fiducials (34 observations from the zero parallax position),

For the Tempest Airborne EM system, due to the asymmetry in the transmitter loop-receiver coil geometry with respect to flight direction, there is no single EM parallax value which will align the peak response for all conductivity distributions for lines flown in opposite directions.

The choice of EM parallax value depends on the intended usage, but with the predominance of broad, shallowly dipping conductors, and the client's desire to grid the data, parallax has been applied so that data are optimised for gridding. The 'optimum' depends on the conductor depth, the acquisition geometry and the delay time, and hence, the selected value will be a compromise.

(NB negative parallax values are defined in this case as shifting the indicated quantity forward along line to larger fiducial values. Location information remains in the zero parallax state)

6.2.6 Delivered Products

Appendix III contains a complete list of all data supplied digitally.

Digital ascii located data and a Geosoft GDB format was produced, containing the raw and final, X and Z EM data, conductivity data as well as magnetics and digital terrain.

Stacked CDI sections and CDI-multiplots (Z component) in Adobe PDF format.

Grids (in ER Mapper format) of all X and Z EM windows, total magnetic field and digital elevation were produced.

A flight path map was delivered in Oasis “.map” format and “png” image format.

Acquisition and processing report in hardcopy and digital format.

7. REFERENCES

- Garner, S.J., Thiel, D.V., 2000, Broadband (ULF-VLF) surface impedance measurements using MIMDAS: Exploration Geophysics, 31, 173-178.
- Green, A., 1998. Altitude correction of time domain AEM data for image display and geological mapping, using the Apparent Dipole Depth (ADD) method. Expl. Geoph. 29, 87-91.
- Green, A., 1998. The use of multivariate statistical techniques for the analysis and display of AEM data. Expl. Geoph. 29, 77-82.
- Green, A., Lin, Z., 1996. Effect of uncertain or changing system geometry on airborne transient electromagnetic data: CSIRO Expl. and Mining Research News No. 6, August 1996, 9-11, CSIRO Division of Exploration and Mining.
- Lane, R., 2000, Conductive unit parameters : summarising complex conductivity distributions: Paper accepted for presentation at the SEG Annual Meeting, August 2000.
- Lane, R., Green, A., Golding, C., Owers, M., Pik, P., Plunkett, C., Sattel, D., Thorn, B., 2000, An example of 3D conductivity mapping using the TEMPEST airborne electromagnetic system: Exploration Geophysics, 31, 162-172.
- Lane, R., Leeming, P., Owers, M., Triggs, D., 1999, Undercover assignment for TEMPEST: Preview, Issue 82, 17-21.
- Lane, R., Pracilio, G., 2000: Visualisation of sub-surface conductivity derived from airborne EM, SAGEEP 2000, 101-111.

APPENDIX I – Weekly Acquisition Reports

System: Tempest

System:	Compass
Aircraft:	VH-WGT

10055.5	Hrs - Progressive M/R Hrs at the start of job, prior to mobilisation
---------	--

Total Job kms: 2026.000 Kms

10073.1 Hrs - The hours the Periodic Inspection is actually due at start of the job

Plan Kms Remain: Kms

% Complete:	100.000	%
-------------	---------	---

Job Number: 2146

Contract Number:	CT6319
------------------	--------

Job Name: Ngalia Basin

Area Names: 1 2 3 4

Client: Elemrnt 92

Date	Flt	Pilot initials	On board Oper initials	Production inc. Reflights Exc. Scrubs	FAS Scrub	Time		Engine Hours on M/R	Hours to Periodic Inspectio	Job Hrs to Date	Prod. to Date	FAS Scrubs to Date	Stdby Days	Activity Contribution	Activity	COMMENTS <u>Weather</u> , <u>Data delivery</u> <u>Aircraft movement</u> , etc
						Start	End									
08-November-2010		PH				7:30:00	9:10:00	1.7						0.20	MO	Aircraft mobilisation From alice springs to Vaughan springs
Julian Day 312														0.80	MO	crew mobilisation to vaughan springs
Monday																
									15.9	1.7						
Date 9-Nov														0.50	SETUP	new base setup
Julian Day 313	1	PH	MG	84.000		15:10:00	17:25:00	2.3						0.50	P	Area 2 done straight after comp Box
Tuesday															Comment	Area 2 complete
									13.6	4.0	84.000					
Date 10-Nov	2	PH	MG	453.800		6:30:00	10:05:00	3.6						0.40	P	
Julian Day 314	3	PH	MG	21.700	29.700	11:30:00	12:55:00	1.4						0.10	P & S	one line scrubbed due coil knocks
Wednesday													0.50	0.50	W	sferics
									8.6	9.0	559.500	29.700				
Date 11-Nov	4	PH	MG	412.900		6:20:00	9:45:00	3.4						0.50	P	
Julian Day 315													0.50	0.50	W	Thunder storms
Thursday																
									5.2	12.4	972.400	29.700				
Date 12-Nov													1.00	1.00	W	Thunder storms
Julian Day 316																
Friday																
									5.2	12.4	972.400	29.700				
Date 13-Nov	5	PH	MG	287.400		6:48:00	10:12:00	3.4						0.50	P	
Julian Day 317	6	PH	MG			11:37:00	13:24:00	1.8						0.20	E	equipment problem
Saturday														0.30	E	equipment problem
															Comment	100 hourly maintenance done during standby periods
									100.0	17.6	1259.800	29.700				
Date 14-Nov													1.00	E	equipment problem	
Julian Day 318																
Sunday																
									100.0	17.6	1259.800	29.700				
Totals This Week: ►				1259.800	29.700	Week Hours:►		17.5	▲: A/C Hrs to Next Service				2.00	7.00		

System: Tempest
Aircraft: VH-WGT

10055.5 Hrs - Progressive M/R Hrs at the start of job, prior to mobilisation

Job Number: 2146
Contract Number: CT6319
Job Name: Ngalia Basin
Area Names: 1 2 3 4
Client: Elemrnt 92

Total Job kms: 2026.000 Kms

10073.1 Hrs - The hours the Periodic Inspection is actually due at start of the job

Plan Kms Remain: 0.000 Kms

% Complete: 100.000 %

Date	Fit	Pilot initials	On board Oper initials	Production inc. Reflights Exc. Scrubs	FAS Scrub	Time		Engine Hours on M/R	Hours to Periodic Inspectio	Job Hrs to Date	Prod. to Date	FAS Scrubs to Date	Stdb Days	Activity Contribution	Activity	COMMENTS Weather, Data delivery Aircraft movement, etc
						Start	End									
15-November-2010						6:30:00	7:55:00	1.4						0.20	E	ferry flight to alicé springs to fix the system
Julian Day 319														0.80	E	time spent fixing equipment
Monday															Comment	move equipment and base camp to Tilmouth Roadhouse
									98.6	19.0	1259.800	29.700				
Date 16-Nov														1.00	E	system repairs / testing
Julian Day 320															Comment	rain at Tilmouth, strip unusable
Tuesday									98.6	19.0	1259.800	29.700				
Date 17-Nov														1.00	E	system repairs / testing
Julian Day 321															Comment	rain at Tilmouth, strip unusable
Wednesday									98.6	19.0	1259.800	29.700				
Date 18-Nov													1.00	1.00	W	Aircraft on standby waiting for Tilmouth Airstrip to dry out
Julian Day 322																
Thursday									98.6	19.0	1259.800	29.700				
Date 19-Nov	7	PH	MG	208.000		6:30:00	9:35:00	3.1						0.50	P	Aircraft Alice to Tilmouth and completes survey flight
Julian Day 323													0.50	0.50	W	too windy and sferics for afternoon flight
Friday															Comment	PH and MG travel Alice to Tilmouth (return) to view airstrip
									95.5	22.1	1467.800	29.700				
Date 20-Nov	8	PH	MG	347.500		5:36:00	9:10:00	3.6						0.50	P & R	Line 10013 reflow
Julian Day 324	9	PH	MG	210.700		10:14:00	13:13:00	3.0						0.30	P	
Saturday														0.20	SETUP	time spent packing up base gear
									88.9	28.7	2026.000	29.700				
Date 21-Nov		PH	MG			6:35:00	7:55:00	1.3						0.20	MO	Demobilization from Tilmouth well to Ayres rock
Julian Day 325		PH	MG			8:57:00	10:44:00	1.8						0.30	MO	ferry flight from ayres rock to waburton
Sunday		PH	MG			11:56:00	14:31:00	2.6						0.50	MO	ferry flight from waburton to wiluna
															Comment	Whole crew demobilized after job finished
									83.2	34.4	2026.000	29.700			Comment	SM and JRG demob to Alice Springs. SM departs for Perth
Totals This Week: ▶				766.200		Week Hours: ▶				16.8	▲ : A/C Hrs to Next Service				1.50	7.00

APPENDIX II – Located Data Formats

Headers for final data files

AREA 1

FINAL EM

```

COMM FAS PROJECT NUMBER                2146
COMM AREA NUMBER:                        1
COMM SURVEY COMPANY:                    Fugro Airborne Surveys
COMM CLIENT:                            Element 92
COMM SURVEY TYPE:                        25Hz TEMPEST Survey
COMM AREA NAME:                          Ngalia Basin
COMM STATE:                             NT
COMM COUNTRY:                            Australia
COMM SURVEY FLOWN:                       Oct 2010
COMM LOCATED DATA CREATED:              Dec 2010
COMM
COMM DATUM:                              GDA94
COMM PROJECTION:                          MGA
COMM ZONE:                                52
COMM
COMM SURVEY SPECIFICATIONS
COMM
COMM TRAVERSE LINE SPACING:              2560 m
COMM TRAVERSE LINE DIRECTION:            045 - 225 deg
COMM NOMINAL TERRAIN CLEARANCE:          100 m
COMM FINAL LINE KILOMETRES:              1364 km
COMM
COMM LINE NUMBERING
COMM
COMM TRAVERSE LINE NUMBERS:              10001 - 10052
COMM
COMM SURVEY EQUIPMENT
COMM
COMM AIRCRAFT:                           VH-WGT
COMM
COMM MAGNETOMETER:                       Geometrics GR820 CV Magnetometer
COMM INSTALLATION:                       Stinger mounted
COMM RESOLUTION:                         0.001 nT
COMM RECORDING INTERVAL:                 0.2 s
COMM
COMM ELECTROMAGNETIC SYSTEM:              25Hz TEMPEST
COMM INSTALLATION:                       Transmitter loop mounted on the aircraft
COMM                                     Receiver coils in a towed bird
COMM COIL ORIENTATION:                    X,Z
COMM RECORDING INTERVAL:                 0.2 s
COMM SYSTEM GEOMETRY:
COMM RECEIVER DISTANCE BEHIND THE TRANSMITTER: -115 m
COMM RECEIVER DISTANCE BELOW THE TRANSMITTER: -40 m
COMM
COMM RADAR ALTIMETER:                     Collins Alt-50
COMM RECORDING INTERVAL:                 0.2 s
COMM
COMM LASER ALTIMETER:                     Optech 501SB
COMM RECORDING INTERVAL:                 0.2 s
COMM
COMM NAVIGATION:                         Real-time differential GPS
COMM RECORDING INTERVAL:                 1.0 s
COMM
COMM ACQUISITION SYSTEM:                  FASDAS

```

COMM
COMM DATA PROCESSING
COMM
COMM MAGNETIC DATA
COMM DIURNAL CORRECTION APPLIED base value 52632 nT
COMM PARALLAX CORRECTION APPLIED 0.2 s
COMM IGRF CORRECTION APPLIED base value 52597 nT
COMM IGRF MODEL 2010 extrapolated to 2010/11/09
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM TERRAIN CLEARANCE DATA
COMM LASER ALTIMETER: PARALLAX CORRECTION APPLIED 0.0 s
COMM RADAR ALTIMETER: PARALLAX CORRECTION APPLIED 0.0 s
COMM
COMM GPS ALTITUDE DATA
COMM PARALLAX CORRECTION APPLIED 0.0 s
COMM
COMM DIGITAL TERRAIN DATA
COMM DTM CALCULATED [DTM = GPS ALTITUDE - (LASER ALT + SENSOR SEPARATION)]
COMM DATA CORRECTED TO AUSTRALIAN HEIGHT DATUM
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM ELECTROMAGNETIC DATA
COMM SYSTEM PARALLAX REMOVED, AS FOLLOWS:
COMM X-COMPONENT EM DATA 6.6 s
COMM Z-COMPONENT EM DATA 6.8 s
COMM DATA CORRECTED FOR TRANSMITTER HEIGHT, PITCH AND ROLL
COMM DATA CORRECTED FOR TRANSMITTER-RECEIVER GEOMETRY VARIATIONS
COMM DATA HAVE BEEN MICROLEVELLED
COMM CONDUCTIVITY DEPTH INVERSION CALCULATED EMFlow V5.10
COMM CONDUCTIVITY DEPTH RANGE 000 - 500 m
COMM CONDUCTIVITY DEPTH INTERVAL 5 m
COMM CONDUCTIVITIES CALCULATED USING HPRG CORRECTED EMZ DATA
COMM
COMM -----
COMM DISCLAIMER
COMM -----
COMM It is Fugro Airborne Survey's understanding that the data provided to
COMM the client is to be used for the purpose agreed between the parties.
COMM That purpose was a significant factor in determining the scope and
COMM level of the Services being offered to the Client. Should the purpose
COMM for which the data is used change, the data may no longer be valid or
COMM appropriate and any further use of, or reliance upon, the data in
COMM those circumstances by the Client without Fugro Airborne Survey's
COMM review and advice shall be at the Client's own or sole risk.
COMM
COMM The Services were performed by Fugro Airborne Survey exclusively for
COMM the purposes of the Client. Should the data be made available in whole
COMM or part to any third party, and such party relies thereon, that party
COMM does so wholly at its own and sole risk and Fugro Airborne Survey
COMM disclaims any liability to such party.
COMM
COMM Where the Services have involved Fugro Airborne Survey's use of any
COMM information provided by the Client or third parties, upon which
COMM Fugro Airborne Survey was reasonably entitled to rely, then the
COMM Services are limited by the accuracy of such information. Fugro
COMM Airborne Survey is not liable for any inaccuracies (including any
COMM incompleteness) in the said information, save as otherwise provided
COMM in the terms of the contract between the Client and Fugro Airborne
COMM Survey.
COMM
COMM With regard to DIGITAL TERRAIN DATA, the accuracy of the elevation

COMM calculation is directly dependent on the accuracy of the two input
 COMM parameters laser altitude and GPS altitude. The laser and radar altitude
 COMM value may be erroneous in areas of heavy tree cover, where the
 COMM altimeters reflect the distance to the tree canopy rather than the
 COMM ground. The GPS altitude value is primarily dependent on the number of
 COMM available satellites. Although post-processing of GPS data will yield X
 COMM and Y accuracies in the order of 1-2 metres, the accuracy of the
 COMM altitude value is usually much less, sometimes in the ± 5 metre range.
 COMM Further inaccuracies may be introduced during the interpolation and
 COMM gridding process.

COMM Because of the inherent inaccuracies of this method, no guarantee is
 COMM made or implied that the information displayed is a true
 COMM representation of the height above sea level. Although this product
 COMM may be of some use as a general reference,
 COMM THIS PRODUCT MUST NOT BE USED FOR NAVIGATION PURPOSES.

COMM -----

COMM

COMM ELECTROMAGNETIC SYSTEM

COMM

COMM TEMPEST IS A TIME-DOMAIN SQUARE-WAVE SYSTEM,
 COMM TRANSMITTING AT A BASE FREQUENCY OF 25Hz,
 COMM WITH 2 ORTHOGONAL-AXIS RECEIVER COILS IN A TOWED BIRD.
 COMM FINAL EM OUTPUT IS RECORDED 5 TIMES PER SECOND.
 COMM THE TIMES (IN MILLISECONDS) FOR THE 15 WINDOWS ARE:

COMM

COMM WINDOW	START	END	CENTRE
COMM 1	0.007	0.020	0.013
COMM 2	0.033	0.047	0.040
COMM 3	0.060	0.073	0.067
COMM 4	0.087	0.127	0.107
COMM 5	0.140	0.207	0.173
COMM 6	0.220	0.340	0.280
COMM 7	0.353	0.553	0.453
COMM 8	0.567	0.873	0.720
COMM 9	0.887	1.353	1.120
COMM 10	1.367	2.100	1.733
COMM 11	2.113	3.273	2.693
COMM 12	3.287	5.113	4.200
COMM 13	5.127	7.993	6.560
COMM 14	8.007	12.393	10.200
COMM 15	12.407	19.993	16.200

COMM

COMM PULSE WIDTH: 10 ms

COMM

COMM TEMPEST EM data are transformed to the response that would be
 COMM obtained with a B-field sensor for a 100% duty cycle square
 COMM waveform at the base frequency, involving a 1A change in
 COMM current (from -0.5A to +0.5A to -0.5A) in a 1sq.m transmitter.
 COMM It is this configuration, rather than the actual acquisition
 COMM configuration, which must be specified when modelling TEMPEST data.

COMM

COMM LOCATED DATA FORMAT

COMM

COMM Output field format : ASCII ASEG-GDF

COMM

COMM FIELD	UNITS	NULL	FORMAT
COMM Line		-99999999	I10
COMM Flight		-99	I4
COMM Fiducial		-999999.9	F8.1
COMM Project_FAS		-9999	I6
COMM Date		-9999999	I9
COMM Time	s	-9999.9	F8.1
COMM Bearing	deg	-99	I4
COMM Latitude	deg	-99.9999999	F12.7

COMM Longitude	deg	-999.9999999	F13.7
COMM Easting	m	-99999.99	F10.2
COMM Northing	m	-999999.99	F11.2
COMM Tx_Elevation	m	-999.99	F8.2
COMM LaserAlt	m	-999.99	F8.2
COMM DTM	m	-999.99	F8.2
COMM Mag	nT	-99999.999	F11.3
COMM Tx_Pitch	deg	-999.99	F8.2
COMM Tx_Roll	deg	-999.99	F8.2
COMM Tx_Clearance	m	-999.99	F8.2
COMM HSep_Raw	m	-999.99	F8.2
COMM VSep_Raw	m	-999.99	F8.2
COMM Tx_Clearance_std	m	-999.99	F8.2
COMM HSep_std	m	-999.99	F8.2
COMM VSep_std	m	-999.99	F8.2
COMM EMX_nonhprg_01	fT	-999.999999	F12.6
COMM EMX_nonhprg_02	fT	-999.999999	F12.6
COMM EMX_nonhprg_03	fT	-999.999999	F12.6
COMM EMX_nonhprg_04	fT	-999.999999	F12.6
COMM EMX_nonhprg_05	fT	-999.999999	F12.6
COMM EMX_nonhprg_06	fT	-999.999999	F12.6
COMM EMX_nonhprg_07	fT	-999.999999	F12.6
COMM EMX_nonhprg_08	fT	-999.999999	F12.6
COMM EMX_nonhprg_09	fT	-999.999999	F12.6
COMM EMX_nonhprg_10	fT	-999.999999	F12.6
COMM EMX_nonhprg_11	fT	-999.999999	F12.6
COMM EMX_nonhprg_12	fT	-999.999999	F12.6
COMM EMX_nonhprg_13	fT	-999.999999	F12.6
COMM EMX_nonhprg_14	fT	-999.999999	F12.6
COMM EMX_nonhprg_15	fT	-999.999999	F12.6
COMM EMX_hprg_01	fT	-999.999999	F12.6
COMM EMX_hprg_02	fT	-999.999999	F12.6
COMM EMX_hprg_03	fT	-999.999999	F12.6
COMM EMX_hprg_04	fT	-999.999999	F12.6
COMM EMX_hprg_05	fT	-999.999999	F12.6
COMM EMX_hprg_06	fT	-999.999999	F12.6
COMM EMX_hprg_07	fT	-999.999999	F12.6
COMM EMX_hprg_08	fT	-999.999999	F12.6
COMM EMX_hprg_09	fT	-999.999999	F12.6
COMM EMX_hprg_10	fT	-999.999999	F12.6
COMM EMX_hprg_11	fT	-999.999999	F12.6
COMM EMX_hprg_12	fT	-999.999999	F12.6
COMM EMX_hprg_13	fT	-999.999999	F12.6
COMM EMX_hprg_14	fT	-999.999999	F12.6
COMM EMX_hprg_15	fT	-999.999999	F12.6
COMM X_Sferics		-9999.999	F10.3
COMM X_LowFreq		-9999.999	F10.3
COMM X_Powerline		-9999.999	F10.3
COMM X_VLF1		-9999.999	F10.3
COMM X_VLF2		-9999.999	F10.3
COMM X_VLF3		-9999.999	F10.3
COMM X_VLF4		-9999.999	F10.3
COMM X_Geofact		-9999.999	F10.3
COMM EMZ_nonhprg_01	fT	-999.999999	F12.6
COMM EMZ_nonhprg_02	fT	-999.999999	F12.6
COMM EMZ_nonhprg_03	fT	-999.999999	F12.6
COMM EMZ_nonhprg_04	fT	-999.999999	F12.6
COMM EMZ_nonhprg_05	fT	-999.999999	F12.6
COMM EMZ_nonhprg_06	fT	-999.999999	F12.6
COMM EMZ_nonhprg_07	fT	-999.999999	F12.6
COMM EMZ_nonhprg_08	fT	-999.999999	F12.6
COMM EMZ_nonhprg_09	fT	-999.999999	F12.6
COMM EMZ_nonhprg_10	fT	-999.999999	F12.6
COMM EMZ_nonhprg_11	fT	-999.999999	F12.6

COMM EMZ_nonhprg_12	fT	-999.999999	F12.6
COMM EMZ_nonhprg_13	fT	-999.999999	F12.6
COMM EMZ_nonhprg_14	fT	-999.999999	F12.6
COMM EMZ_nonhprg_15	fT	-999.999999	F12.6
COMM EMZ_hprg_01	fT	-999.999999	F12.6
COMM EMZ_hprg_02	fT	-999.999999	F12.6
COMM EMZ_hprg_03	fT	-999.999999	F12.6
COMM EMZ_hprg_04	fT	-999.999999	F12.6
COMM EMZ_hprg_05	fT	-999.999999	F12.6
COMM EMZ_hprg_06	fT	-999.999999	F12.6
COMM EMZ_hprg_07	fT	-999.999999	F12.6
COMM EMZ_hprg_08	fT	-999.999999	F12.6
COMM EMZ_hprg_09	fT	-999.999999	F12.6
COMM EMZ_hprg_10	fT	-999.999999	F12.6
COMM EMZ_hprg_11	fT	-999.999999	F12.6
COMM EMZ_hprg_12	fT	-999.999999	F12.6
COMM EMZ_hprg_13	fT	-999.999999	F12.6
COMM EMZ_hprg_14	fT	-999.999999	F12.6
COMM EMZ_hprg_15	fT	-999.999999	F12.6
COMM Z_Sferics		-9999.999	F10.3
COMM Z_LowFreq		-9999.999	F10.3
COMM Z_Powerline		-9999.999	F10.3
COMM Z_VLF1		-9999.999	F10.3
COMM Z_VLF2		-9999.999	F10.3
COMM Z_VLF3		-9999.999	F10.3
COMM Z_VLF4		-9999.999	F10.3
COMM Z_Geofact		-9999.999	F10.3
COMM CND_Z_[1:100]	mS/m	-9999.999	F10.3

AREA 2

FINAL EM

COMM FAS PROJECT NUMBER	2146
COMM AREA NUMBER:	2
COMM SURVEY COMPANY:	Fugro Airborne Surveys
COMM CLIENT:	Element 92
COMM SURVEY TYPE:	25Hz TEMPEST Survey
COMM AREA NAME:	Ngalia Basin
COMM STATE:	NT
COMM COUNTRY:	Australia
COMM SURVEY FLOWN:	Oct 2010
COMM LOCATED DATA CREATED:	Dec 2010
COMM	
COMM DATUM:	GDA94
COMM PROJECTION:	MGA
COMM ZONE:	52
COMM	
COMM SURVEY SPECIFICATIONS	
COMM	
COMM TRAVERSE LINE SPACING:	5120 m
COMM TRAVERSE LINE DIRECTION:	135 - 315 deg
COMM NOMINAL TERRAIN CLEARANCE:	100 m
COMM FINAL LINE KILOMETRES:	81 km
COMM	
COMM LINE NUMBERING	
COMM	
COMM TRAVERSE LINE NUMBERS:	20001 - 20006
COMM	
COMM SURVEY EQUIPMENT	
COMM	
COMM AIRCRAFT:	VH-WGT
COMM	
COMM MAGNETOMETER:	Geometrics GR820 CV Magnetometer

```

COMM INSTALLATION:                               Stinger mounted
COMM RESOLUTION:                                0.001 nT
COMM RECORDING INTERVAL:                        0.2 s
COMM
COMM ELECTROMAGNETIC SYSTEM:                    25Hz TEMPEST
COMM INSTALLATION:                               Transmitter loop mounted on the aircraft
COMM                                              Receiver coils in a towed bird
COMM COIL ORIENTATION:                          X,Z
COMM RECORDING INTERVAL:                        0.2 s
COMM SYSTEM GEOMETRY:
COMM RECEIVER DISTANCE BEHIND THE TRANSMITTER:  -115 m
COMM RECEIVER DISTANCE BELOW THE TRANSMITTER:  -40 m
COMM
COMM RADAR ALTIMETER:                           Collins Alt-50
COMM RECORDING INTERVAL:                        0.2 s
COMM
COMM LASER ALTIMETER:                           Optech 501SB
COMM RECORDING INTERVAL:                        0.2 s
COMM
COMM NAVIGATION:                               Real-time differential GPS
COMM RECORDING INTERVAL:                        1.0 s
COMM
COMM ACQUISITION SYSTEM:                       FASDAS
COMM
COMM DATA PROCESSING
COMM
COMM MAGNETIC DATA
COMM DIURNAL CORRECTION APPLIED                 base value 52632 nT
COMM PARALLAX CORRECTION APPLIED                 0.2 s
COMM IGRF CORRECTION APPLIED                   base value 52597 nT
COMM IGRF MODEL 2010 extrapolated to            2010/11/09
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM TERRAIN CLEARANCE DATA
COMM LASER ALTIMETER: PARALLAX CORRECTION APPLIED 0.0 s
COMM RADAR ALTIMETER: PARALLAX CORRECTION APPLIED 0.0 s
COMM
COMM GPS ALTITUDE DATA
COMM PARALLAX CORRECTION APPLIED                 0.0 s
COMM
COMM DIGITAL TERRAIN DATA
COMM DTM CALCULATED [DTM = GPS ALTITUDE - (LASER ALT + SENSOR SEPARATION)]
COMM DATA CORRECTED TO AUSTRALIAN HEIGHT DATUM
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM ELECTROMAGNETIC DATA
COMM SYSTEM PARALLAX REMOVED, AS FOLLOWS:
COMM      X-COMPONENT EM DATA                   6.6 s
COMM      Z-COMPONENT EM DATA                   6.8 s
COMM DATA CORRECTED FOR TRANSMITTER HEIGHT, PITCH AND ROLL
COMM DATA CORRECTED FOR TRANSMITTER-RECEIVER GEOMETRY VARIATIONS
COMM DATA HAVE BEEN MICROLEVELLED
COMM CONDUCTIVITY DEPTH INVERSION CALCULATED     EMFlow V5.10
COMM CONDUCTIVITY DEPTH RANGE                   000 - 500 m
COMM CONDUCTIVITY DEPTH INTERVAL                 5 m
COMM CONDUCTIVITIES CALCULATED USING HPRG CORRECTED EMZ DATA
COMM
COMM -----
COMM DISCLAIMER
COMM -----
COMM It is Fugro Airborne Survey's understanding that the data provided to
COMM the client is to be used for the purpose agreed between the parties.

```


COMM That purpose was a significant factor in determining the scope and
 COMM level of the Services being offered to the Client. Should the purpose
 COMM for which the data is used change, the data may no longer be valid or
 COMM appropriate and any further use of, or reliance upon, the data in
 COMM those circumstances by the Client without Fugro Airborne Survey's
 COMM review and advice shall be at the Client's own or sole risk.

COMM

COMM The Services were performed by Fugro Airborne Survey exclusively for
 COMM the purposes of the Client. Should the data be made available in whole
 COMM or part to any third party, and such party relies thereon, that party
 COMM does so wholly at its own and sole risk and Fugro Airborne Survey
 COMM disclaims any liability to such party.

COMM

COMM Where the Services have involved Fugro Airborne Survey's use of any
 COMM information provided by the Client or third parties, upon which
 COMM Fugro Airborne Survey was reasonably entitled to rely, then the
 COMM Services are limited by the accuracy of such information. Fugro
 COMM Airborne Survey is not liable for any inaccuracies (including any
 COMM incompleteness) in the said information, save as otherwise provided
 COMM in the terms of the contract between the Client and Fugro Airborne
 COMM Survey.

COMM

COMM With regard to DIGITAL TERRAIN DATA, the accuracy of the elevation
 COMM calculation is directly dependent on the accuracy of the two input
 COMM parameters laser altitude and GPS altitude. The laser and radar altitude
 COMM value may be erroneous in areas of heavy tree cover, where the
 COMM altimeters reflect the distance to the tree canopy rather than the
 COMM ground. The GPS altitude value is primarily dependent on the number of
 COMM available satellites. Although post-processing of GPS data will yield X
 COMM and Y accuracies in the order of 1-2 metres, the accuracy of the
 COMM altitude value is usually much less, sometimes in the ± 5 metre range.
 COMM Further inaccuracies may be introduced during the interpolation and
 COMM gridding process.

COMM Because of the inherent inaccuracies of this method, no guarantee is
 COMM made or implied that the information displayed is a true
 COMM representation of the height above sea level. Although this product
 COMM may be of some use as a general reference,
 COMM THIS PRODUCT MUST NOT BE USED FOR NAVIGATION PURPOSES.

COMM

COMM

COMM ELECTROMAGNETIC SYSTEM

COMM

COMM TEMPEST IS A TIME-DOMAIN SQUARE-WAVE SYSTEM,
 COMM TRANSMITTING AT A BASE FREQUENCY OF 25Hz,
 COMM WITH 2 ORTHOGONAL-AXIS RECEIVER COILS IN A TOWED BIRD.
 COMM FINAL EM OUTPUT IS RECORDED 5 TIMES PER SECOND.
 COMM THE TIMES (IN MILLISECONDS) FOR THE 15 WINDOWS ARE:

COMM

COMM WINDOW	START	END	CENTRE
COMM 1	0.007	0.020	0.013
COMM 2	0.033	0.047	0.040
COMM 3	0.060	0.073	0.067
COMM 4	0.087	0.127	0.107
COMM 5	0.140	0.207	0.173
COMM 6	0.220	0.340	0.280
COMM 7	0.353	0.553	0.453
COMM 8	0.567	0.873	0.720
COMM 9	0.887	1.353	1.120
COMM 10	1.367	2.100	1.733
COMM 11	2.113	3.273	2.693
COMM 12	3.287	5.113	4.200
COMM 13	5.127	7.993	6.560
COMM 14	8.007	12.393	10.200
COMM 15	12.407	19.993	16.200

```

COMM
COMM PULSE WIDTH: 10 ms
COMM
COMM TEMPEST EM data are transformed to the response that would be
COMM obtained with a B-field sensor for a 100% duty cycle square
COMM waveform at the base frequency, involving a 1A change in
COMM current (from -0.5A to +0.5A to -0.5A) in a 1sq.m transmitter.
COMM It is this configuration, rather than the actual acquisition
COMM configuration, which must be specified when modelling TEMPEST data.
COMM
COMM LOCATED DATA FORMAT
COMM
COMM Output field format : ASCII ASEG-GDF
COMM
COMM FIELD                UNITS                NULL                FORMAT
COMM Line                 -999999999          I10
COMM Flight               -99                I4
COMM Fiducial             -999999.9          F8.1
COMM Project_FAS          -9999              I6
COMM Date                 -9999999          I9
COMM Time                 s                 -9999.9             F8.1
COMM Bearing              deg              -99                I4
COMM Latitude             deg              -99.9999999        F12.7
COMM Longitude            deg              -999.9999999        F13.7
COMM Easting              m                -99999.99           F10.2
COMM Northing             m                -999999.99          F11.2
COMM Tx_Elevation         m                -999.99             F8.2
COMM LaserAlt             m                -999.99             F8.2
COMM DTM                  m                -999.99             F8.2
COMM Mag                  nT              -99999.999          F11.3
COMM Tx_Pitch             deg              -999.99             F8.2
COMM Tx_Roll              deg              -999.99             F8.2
COMM Tx_Clearance         m                -999.99             F8.2
COMM HSep_Raw             m                -999.99             F8.2
COMM VSep_Raw             m                -999.99             F8.2
COMM Tx_Clearance_std     m                -999.99             F8.2
COMM HSep_std             m                -999.99             F8.2
COMM VSep_std             m                -999.99             F8.2
COMM EMX_nonhprg_01       fT              -999.999999          F12.6
COMM EMX_nonhprg_02       fT              -999.999999          F12.6
COMM EMX_nonhprg_03       fT              -999.999999          F12.6
COMM EMX_nonhprg_04       fT              -999.999999          F12.6
COMM EMX_nonhprg_05       fT              -999.999999          F12.6
COMM EMX_nonhprg_06       fT              -999.999999          F12.6
COMM EMX_nonhprg_07       fT              -999.999999          F12.6
COMM EMX_nonhprg_08       fT              -999.999999          F12.6
COMM EMX_nonhprg_09       fT              -999.999999          F12.6
COMM EMX_nonhprg_10       fT              -999.999999          F12.6
COMM EMX_nonhprg_11       fT              -999.999999          F12.6
COMM EMX_nonhprg_12       fT              -999.999999          F12.6
COMM EMX_nonhprg_13       fT              -999.999999          F12.6
COMM EMX_nonhprg_14       fT              -999.999999          F12.6
COMM EMX_nonhprg_15       fT              -999.999999          F12.6
COMM EMX_hprg_01          fT              -999.999999          F12.6
COMM EMX_hprg_02          fT              -999.999999          F12.6
COMM EMX_hprg_03          fT              -999.999999          F12.6
COMM EMX_hprg_04          fT              -999.999999          F12.6
COMM EMX_hprg_05          fT              -999.999999          F12.6
COMM EMX_hprg_06          fT              -999.999999          F12.6
COMM EMX_hprg_07          fT              -999.999999          F12.6
COMM EMX_hprg_08          fT              -999.999999          F12.6
COMM EMX_hprg_09          fT              -999.999999          F12.6
COMM EMX_hprg_10          fT              -999.999999          F12.6
COMM EMX_hprg_11          fT              -999.999999          F12.6

```

COMM EMX_hprg_12	fT	-999.999999	F12.6
COMM EMX_hprg_13	fT	-999.999999	F12.6
COMM EMX_hprg_14	fT	-999.999999	F12.6
COMM EMX_hprg_15	fT	-999.999999	F12.6
COMM X_Sferics		-9999.999	F10.3
COMM X_LowFreq		-9999.999	F10.3
COMM X_Powerline		-9999.999	F10.3
COMM X_VLF1		-9999.999	F10.3
COMM X_VLF2		-9999.999	F10.3
COMM X_VLF3		-9999.999	F10.3
COMM X_VLF4		-9999.999	F10.3
COMM X_Geofact		-9999.999	F10.3
COMM EMZ_nonhprg_01	fT	-999.999999	F12.6
COMM EMZ_nonhprg_02	fT	-999.999999	F12.6
COMM EMZ_nonhprg_03	fT	-999.999999	F12.6
COMM EMZ_nonhprg_04	fT	-999.999999	F12.6
COMM EMZ_nonhprg_05	fT	-999.999999	F12.6
COMM EMZ_nonhprg_06	fT	-999.999999	F12.6
COMM EMZ_nonhprg_07	fT	-999.999999	F12.6
COMM EMZ_nonhprg_08	fT	-999.999999	F12.6
COMM EMZ_nonhprg_09	fT	-999.999999	F12.6
COMM EMZ_nonhprg_10	fT	-999.999999	F12.6
COMM EMZ_nonhprg_11	fT	-999.999999	F12.6
COMM EMZ_nonhprg_12	fT	-999.999999	F12.6
COMM EMZ_nonhprg_13	fT	-999.999999	F12.6
COMM EMZ_nonhprg_14	fT	-999.999999	F12.6
COMM EMZ_nonhprg_15	fT	-999.999999	F12.6
COMM EMZ_hprg_01	fT	-999.999999	F12.6
COMM EMZ_hprg_02	fT	-999.999999	F12.6
COMM EMZ_hprg_03	fT	-999.999999	F12.6
COMM EMZ_hprg_04	fT	-999.999999	F12.6
COMM EMZ_hprg_05	fT	-999.999999	F12.6
COMM EMZ_hprg_06	fT	-999.999999	F12.6
COMM EMZ_hprg_07	fT	-999.999999	F12.6
COMM EMZ_hprg_08	fT	-999.999999	F12.6
COMM EMZ_hprg_09	fT	-999.999999	F12.6
COMM EMZ_hprg_10	fT	-999.999999	F12.6
COMM EMZ_hprg_11	fT	-999.999999	F12.6
COMM EMZ_hprg_12	fT	-999.999999	F12.6
COMM EMZ_hprg_13	fT	-999.999999	F12.6
COMM EMZ_hprg_14	fT	-999.999999	F12.6
COMM EMZ_hprg_15	fT	-999.999999	F12.6
COMM Z_Sferics		-9999.999	F10.3
COMM Z_LowFreq		-9999.999	F10.3
COMM Z_Powerline		-9999.999	F10.3
COMM Z_VLF1		-9999.999	F10.3
COMM Z_VLF2		-9999.999	F10.3
COMM Z_VLF3		-9999.999	F10.3
COMM Z_VLF4		-9999.999	F10.3
COMM Z_Geofact		-9999.999	F10.3
COMM CND_Z_[1:100]	mS/m	-9999.999	F10.3

AREA 3

FINAL EM

COMM FAS PROJECT NUMBER	2146
COMM AREA NUMBER:	3
COMM SURVEY COMPANY:	Fugro Airborne Surveys
COMM CLIENT:	Element 92
COMM SURVEY TYPE:	25Hz TEMPEST Survey
COMM AREA NAME:	Ngalia Basin
COMM STATE:	NT
COMM COUNTRY:	Australia

```

COMM SURVEY FLOWN:                               Oct 2010
COMM LOCATED DATA CREATED:                       Dec 2010
COMM
COMM DATUM:                                       GDA94
COMM PROJECTION:                                MGA
COMM ZONE:                                       52
COMM
COMM SURVEY SPECIFICATIONS
COMM
COMM TRAVERSE LINE SPACING:                      1280 m
COMM TRAVERSE LINE DIRECTION:                   045 - 225 deg
COMM NOMINAL TERRAIN CLEARANCE:                 100 m
COMM FINAL LINE KILOMETRES:                     436 km
COMM
COMM LINE NUMBERING
COMM
COMM TRAVERSE LINE NUMBERS:                     10029 - 10041
COMM                                           30001 - 30014
COMM
COMM SURVEY EQUIPMENT
COMM
COMM AIRCRAFT:                                  VH-WGT
COMM
COMM MAGNETOMETER:                             Geometrics GR820 CV Magnetometer
COMM INSTALLATION:                             Stinger mounted
COMM RESOLUTION:                               0.001 nT
COMM RECORDING INTERVAL:                       0.2 s
COMM
COMM ELECTROMAGNETIC SYSTEM:                    25Hz TEMPEST
COMM INSTALLATION:                             Transmitter loop mounted on the aircraft
COMM                                           Receiver coils in a towed bird
COMM COIL ORIENTATION:                         X,Z
COMM RECORDING INTERVAL:                       0.2 s
COMM SYSTEM GEOMETRY:
COMM RECEIVER DISTANCE BEHIND THE TRANSMITTER:  -115 m
COMM RECEIVER DISTANCE BELOW THE TRANSMITTER:  -40 m
COMM
COMM RADAR ALTIMETER:                           Collins Alt-50
COMM RECORDING INTERVAL:                       0.2 s
COMM
COMM LASER ALTIMETER:                           Optech 501SB
COMM RECORDING INTERVAL:                       0.2 s
COMM
COMM NAVIGATION:                               Real-time differential GPS
COMM RECORDING INTERVAL:                       1.0 s
COMM
COMM ACQUISITION SYSTEM:                       FASDAS
COMM
COMM DATA PROCESSING
COMM
COMM MAGNETIC DATA
COMM DIURNAL CORRECTION APPLIED                 base value 52632 nT
COMM PARALLAX CORRECTION APPLIED                0.2 s
COMM IGRF CORRECTION APPLIED                   base value 52597 nT
COMM IGRF MODEL 2010 extrapolated to           2010/11/09
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM TERRAIN CLEARANCE DATA
COMM LASER ALTIMETER: PARALLAX CORRECTION APPLIED 0.0 s
COMM RADAR ALTIMETER: PARALLAX CORRECTION APPLIED 0.0 s
COMM
COMM GPS ALTITUDE DATA
COMM PARALLAX CORRECTION APPLIED                0.0 s

```

COMM
COMM DIGITAL TERRAIN DATA
COMM DTM CALCULATED [DTM = GPS ALTITUDE - (LASER ALT + SENSOR SEPARATION)]
COMM DATA CORRECTED TO AUSTRALIAN HEIGHT DATUM
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM ELECTROMAGNETIC DATA
COMM SYSTEM PARALLAX REMOVED, AS FOLLOWS:
COMM X-COMPONENT EM DATA 6.6 s
COMM Z-COMPONENT EM DATA 6.8 s
COMM DATA CORRECTED FOR TRANSMITTER HEIGHT, PITCH AND ROLL
COMM DATA CORRECTED FOR TRANSMITTER-RECEIVER GEOMETRY VARIATIONS
COMM DATA HAVE BEEN MICROLEVELLED
COMM CONDUCTIVITY DEPTH INVERSION CALCULATED EMFlow V5.10
COMM CONDUCTIVITY DEPTH RANGE 000 - 500 m
COMM CONDUCTIVITY DEPTH INTERVAL 5 m
COMM CONDUCTIVITIES CALCULATED USING HPRG CORRECTED EMZ DATA
COMM
COMM -----
COMM DISCLAIMER
COMM -----
COMM It is Fugro Airborne Survey's understanding that the data provided to
COMM the client is to be used for the purpose agreed between the parties.
COMM That purpose was a significant factor in determining the scope and
COMM level of the Services being offered to the Client. Should the purpose
COMM for which the data is used change, the data may no longer be valid or
COMM appropriate and any further use of, or reliance upon, the data in
COMM those circumstances by the Client without Fugro Airborne Survey's
COMM review and advice shall be at the Client's own or sole risk.
COMM
COMM The Services were performed by Fugro Airborne Survey exclusively for
COMM the purposes of the Client. Should the data be made available in whole
COMM or part to any third party, and such party relies thereon, that party
COMM does so wholly at its own and sole risk and Fugro Airborne Survey
COMM disclaims any liability to such party.
COMM
COMM Where the Services have involved Fugro Airborne Survey's use of any
COMM information provided by the Client or third parties, upon which
COMM Fugro Airborne Survey was reasonably entitled to rely, then the
COMM Services are limited by the accuracy of such information. Fugro
COMM Airborne Survey is not liable for any inaccuracies (including any
COMM incompleteness) in the said information, save as otherwise provided
COMM in the terms of the contract between the Client and Fugro Airborne
COMM Survey.
COMM
COMM With regard to DIGITAL TERRAIN DATA, the accuracy of the elevation
COMM calculation is directly dependent on the accuracy of the two input
COMM parameters laser altitude and GPS altitude. The laser and radar altitude
COMM value may be erroneous in areas of heavy tree cover, where the
COMM altimeters reflect the distance to the tree canopy rather than the
COMM ground. The GPS altitude value is primarily dependent on the number of
COMM available satellites. Although post-processing of GPS data will yield X
COMM and Y accuracies in the order of 1-2 metres, the accuracy of the
COMM altitude value is usually much less, sometimes in the ±5 metre range.
COMM Further inaccuracies may be introduced during the interpolation and
COMM gridding process.
COMM Because of the inherent inaccuracies of this method, no guarantee is
COMM made or implied that the information displayed is a true
COMM representation of the height above sea level. Although this product
COMM may be of some use as a general reference,
COMM THIS PRODUCT MUST NOT BE USED FOR NAVIGATION PURPOSES.
COMM -----
COMM

COMM ELECTROMAGNETIC SYSTEM

COMM

COMM TEMPEST IS A TIME-DOMAIN SQUARE-WAVE SYSTEM,
 COMM TRANSMITTING AT A BASE FREQUENCY OF 25Hz,
 COMM WITH 2 ORTHOGONAL-AXIS RECEIVER COILS IN A TOWED BIRD.
 COMM FINAL EM OUTPUT IS RECORDED 5 TIMES PER SECOND.
 COMM THE TIMES (IN MILLISECONDS) FOR THE 15 WINDOWS ARE:

COMM

COMM WINDOW	START	END	CENTRE
COMM 1	0.007	0.020	0.013
COMM 2	0.033	0.047	0.040
COMM 3	0.060	0.073	0.067
COMM 4	0.087	0.127	0.107
COMM 5	0.140	0.207	0.173
COMM 6	0.220	0.340	0.280
COMM 7	0.353	0.553	0.453
COMM 8	0.567	0.873	0.720
COMM 9	0.887	1.353	1.120
COMM 10	1.367	2.100	1.733
COMM 11	2.113	3.273	2.693
COMM 12	3.287	5.113	4.200
COMM 13	5.127	7.993	6.560
COMM 14	8.007	12.393	10.200
COMM 15	12.407	19.993	16.200

COMM

COMM PULSE WIDTH: 10 ms

COMM

COMM TEMPEST EM data are transformed to the response that would be
 COMM obtained with a B-field sensor for a 100% duty cycle square
 COMM waveform at the base frequency, involving a 1A change in
 COMM current (from -0.5A to +0.5A to -0.5A) in a 1sq.m transmitter.
 COMM It is this configuration, rather than the actual acquisition
 COMM configuration, which must be specified when modelling TEMPEST data.

COMM

COMM LOCATED DATA FORMAT

COMM

COMM Output field format : ASCII ASEG-GDF

COMM

COMM FIELD	UNITS	NULL	FORMAT
COMM Line		-999999999	I10
COMM Flight		-99	I4
COMM Fiducial		-999999.9	F8.1
COMM Project_FAS		-9999	I6
COMM Date		-99999999	I9
COMM Time	s	-9999.9	F8.1
COMM Bearing	deg	-99	I4
COMM Latitude	deg	-99.9999999	F12.7
COMM Longitude	deg	-999.9999999	F13.7
COMM Easting	m	-99999.99	F10.2
COMM Northing	m	-999999.99	F11.2
COMM Tx_Elevation	m	-999.99	F8.2
COMM LaserAlt	m	-999.99	F8.2
COMM DTM	m	-999.99	F8.2
COMM Mag	nT	-99999.999	F11.3
COMM Tx_Pitch	deg	-999.99	F8.2
COMM Tx_Roll	deg	-999.99	F8.2
COMM Tx_Clearance	m	-999.99	F8.2
COMM HSep_Raw	m	-999.99	F8.2
COMM VSep_Raw	m	-999.99	F8.2
COMM Tx_Clearance_std	m	-999.99	F8.2
COMM HSep_std	m	-999.99	F8.2
COMM VSep_std	m	-999.99	F8.2
COMM EMX_nonhprg_01	fT	-999.999999	F12.6
COMM EMX_nonhprg_02	fT	-999.999999	F12.6

COMM EMX_nonhprg_03	fT	-999.999999	F12.6
COMM EMX_nonhprg_04	fT	-999.999999	F12.6
COMM EMX_nonhprg_05	fT	-999.999999	F12.6
COMM EMX_nonhprg_06	fT	-999.999999	F12.6
COMM EMX_nonhprg_07	fT	-999.999999	F12.6
COMM EMX_nonhprg_08	fT	-999.999999	F12.6
COMM EMX_nonhprg_09	fT	-999.999999	F12.6
COMM EMX_nonhprg_10	fT	-999.999999	F12.6
COMM EMX_nonhprg_11	fT	-999.999999	F12.6
COMM EMX_nonhprg_12	fT	-999.999999	F12.6
COMM EMX_nonhprg_13	fT	-999.999999	F12.6
COMM EMX_nonhprg_14	fT	-999.999999	F12.6
COMM EMX_nonhprg_15	fT	-999.999999	F12.6
COMM EMX_hprg_01	fT	-999.999999	F12.6
COMM EMX_hprg_02	fT	-999.999999	F12.6
COMM EMX_hprg_03	fT	-999.999999	F12.6
COMM EMX_hprg_04	fT	-999.999999	F12.6
COMM EMX_hprg_05	fT	-999.999999	F12.6
COMM EMX_hprg_06	fT	-999.999999	F12.6
COMM EMX_hprg_07	fT	-999.999999	F12.6
COMM EMX_hprg_08	fT	-999.999999	F12.6
COMM EMX_hprg_09	fT	-999.999999	F12.6
COMM EMX_hprg_10	fT	-999.999999	F12.6
COMM EMX_hprg_11	fT	-999.999999	F12.6
COMM EMX_hprg_12	fT	-999.999999	F12.6
COMM EMX_hprg_13	fT	-999.999999	F12.6
COMM EMX_hprg_14	fT	-999.999999	F12.6
COMM EMX_hprg_15	fT	-999.999999	F12.6
COMM X_Sferics		-9999.999	F10.3
COMM X_LowFreq		-9999.999	F10.3
COMM X_Powerline		-9999.999	F10.3
COMM X_VLF1		-9999.999	F10.3
COMM X_VLF2		-9999.999	F10.3
COMM X_VLF3		-9999.999	F10.3
COMM X_VLF4		-9999.999	F10.3
COMM X_Geofact		-9999.999	F10.3
COMM EMZ_nonhprg_01	fT	-999.999999	F12.6
COMM EMZ_nonhprg_02	fT	-999.999999	F12.6
COMM EMZ_nonhprg_03	fT	-999.999999	F12.6
COMM EMZ_nonhprg_04	fT	-999.999999	F12.6
COMM EMZ_nonhprg_05	fT	-999.999999	F12.6
COMM EMZ_nonhprg_06	fT	-999.999999	F12.6
COMM EMZ_nonhprg_07	fT	-999.999999	F12.6
COMM EMZ_nonhprg_08	fT	-999.999999	F12.6
COMM EMZ_nonhprg_09	fT	-999.999999	F12.6
COMM EMZ_nonhprg_10	fT	-999.999999	F12.6
COMM EMZ_nonhprg_11	fT	-999.999999	F12.6
COMM EMZ_nonhprg_12	fT	-999.999999	F12.6
COMM EMZ_nonhprg_13	fT	-999.999999	F12.6
COMM EMZ_nonhprg_14	fT	-999.999999	F12.6
COMM EMZ_nonhprg_15	fT	-999.999999	F12.6
COMM EMZ_hprg_01	fT	-999.999999	F12.6
COMM EMZ_hprg_02	fT	-999.999999	F12.6
COMM EMZ_hprg_03	fT	-999.999999	F12.6
COMM EMZ_hprg_04	fT	-999.999999	F12.6
COMM EMZ_hprg_05	fT	-999.999999	F12.6
COMM EMZ_hprg_06	fT	-999.999999	F12.6
COMM EMZ_hprg_07	fT	-999.999999	F12.6
COMM EMZ_hprg_08	fT	-999.999999	F12.6
COMM EMZ_hprg_09	fT	-999.999999	F12.6
COMM EMZ_hprg_10	fT	-999.999999	F12.6
COMM EMZ_hprg_11	fT	-999.999999	F12.6
COMM EMZ_hprg_12	fT	-999.999999	F12.6
COMM EMZ_hprg_13	fT	-999.999999	F12.6

COMM EMZ_hprg_14	fT	-999.999999	F12.6
COMM EMZ_hprg_15	fT	-999.999999	F12.6
COMM Z_Sferics		-9999.999	F10.3
COMM Z_LowFreq		-9999.999	F10.3
COMM Z_Powerline		-9999.999	F10.3
COMM Z_VLF1		-9999.999	F10.3
COMM Z_VLF2		-9999.999	F10.3
COMM Z_VLF3		-9999.999	F10.3
COMM Z_VLF4		-9999.999	F10.3
COMM Z_Geofact		-9999.999	F10.3
COMM CND_Z_[1:100]	mS/m	-9999.999	F10.3

AREA 4

FINAL EM

COMM FAS PROJECT NUMBER	2146
COMM AREA NUMBER:	4
COMM SURVEY COMPANY:	Fugro Airborne Surveys
COMM CLIENT:	Element 92
COMM SURVEY TYPE:	25Hz TEMPEST Survey
COMM AREA NAME:	Ngalia Basin
COMM STATE:	NT
COMM COUNTRY:	Australia
COMM SURVEY FLOWN:	Oct 2010
COMM LOCATED DATA CREATED:	Dec 2010
COMM	
COMM DATUM:	GDA94
COMM PROJECTION:	MGA
COMM ZONE:	52
COMM	
COMM SURVEY SPECIFICATIONS	
COMM	
COMM TRAVERSE LINE SPACING:	320 m
COMM TRAVERSE LINE DIRECTION:	045 - 225 deg
COMM NOMINAL TERRAIN CLEARANCE:	100 m
COMM FINAL LINE KILOMETRES:	386 km
COMM	
COMM LINE NUMBERING	
COMM	
COMM TRAVERSE LINE NUMBERS:	10032 - 10037
COMM	30004 - 30009
COMM	40001 - 40043
COMM	
COMM SURVEY EQUIPMENT	
COMM	
COMM AIRCRAFT:	VH-WGT
COMM	
COMM MAGNETOMETER:	Geometrics GR820 CV Magnetometer
COMM INSTALLATION:	Stinger mounted
COMM RESOLUTION:	0.001 nT
COMM RECORDING INTERVAL:	0.2 s
COMM	
COMM ELECTROMAGNETIC SYSTEM:	25Hz TEMPEST
COMM INSTALLATION:	Transmitter loop mounted on the aircraft
COMM	Receiver coils in a towed bird
COMM COIL ORIENTATION:	X,Z
COMM RECORDING INTERVAL:	0.2 s
COMM SYSTEM GEOMETRY:	
COMM RECEIVER DISTANCE BEHIND THE TRANSMITTER:	-115 m
COMM RECEIVER DISTANCE BELOW THE TRANSMITTER:	-40 m
COMM	
COMM RADAR ALTIMETER:	Collins Alt-50
COMM RECORDING INTERVAL:	0.2 s


```

COMM
COMM LASER ALTIMETER:                               Optech 501SB
COMM RECORDING INTERVAL:                             0.2 s
COMM
COMM NAVIGATION:                                     Real-time differential GPS
COMM RECORDING INTERVAL:                             1.0 s
COMM
COMM ACQUISITION SYSTEM:                             FASDAS
COMM
COMM DATA PROCESSING
COMM
COMM MAGNETIC DATA
COMM DIURNAL CORRECTION APPLIED                       base value 52632 nT
COMM PARALLAX CORRECTION APPLIED                       0.2 s
COMM IGRF CORRECTION APPLIED                           base value 52597 nT
COMM IGRF MODEL 2010 extrapolated to                   2010/11/09
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM TERRAIN CLEARANCE DATA
COMM LASER ALTIMETER: PARALLAX CORRECTION APPLIED     0.0 s
COMM RADAR ALTIMETER: PARALLAX CORRECTION APPLIED     0.0 s
COMM
COMM GPS ALTITUDE DATA
COMM PARALLAX CORRECTION APPLIED                       0.0 s
COMM
COMM DIGITAL TERRAIN DATA
COMM DTM CALCULATED [DTM = GPS ALTITUDE - (LASER ALT + SENSOR SEPARATION)]
COMM DATA CORRECTED TO AUSTRALIAN HEIGHT DATUM
COMM DATA HAVE BEEN TIE LINE LEVELLED
COMM DATA HAVE BEEN MICROLEVELLED
COMM
COMM ELECTROMAGNETIC DATA
COMM SYSTEM PARALLAX REMOVED, AS FOLLOWS:
COMM     X-COMPONENT EM DATA                           6.6 s
COMM     Z-COMPONENT EM DATA                           6.8 s
COMM DATA CORRECTED FOR TRANSMITTER HEIGHT, PITCH AND ROLL
COMM DATA CORRECTED FOR TRANSMITTER-RECEIVER GEOMETRY VARIATIONS
COMM DATA HAVE BEEN MICROLEVELLED
COMM CONDUCTIVITY DEPTH INVERSION CALCULATED           EMFlow V5.10
COMM CONDUCTIVITY DEPTH RANGE                           000 - 500 m
COMM CONDUCTIVITY DEPTH INTERVAL                       5 m
COMM CONDUCTIVITIES CALCULATED USING HPRG CORRECTED EMZ DATA
COMM
COMM -----
COMM DISCLAIMER
COMM -----
COMM It is Fugro Airborne Survey's understanding that the data provided to
COMM the client is to be used for the purpose agreed between the parties.
COMM That purpose was a significant factor in determining the scope and
COMM level of the Services being offered to the Client. Should the purpose
COMM for which the data is used change, the data may no longer be valid or
COMM appropriate and any further use of, or reliance upon, the data in
COMM those circumstances by the Client without Fugro Airborne Survey's
COMM review and advice shall be at the Client's own or sole risk.
COMM
COMM The Services were performed by Fugro Airborne Survey exclusively for
COMM the purposes of the Client. Should the data be made available in whole
COMM or part to any third party, and such party relies thereon, that party
COMM does so wholly at its own and sole risk and Fugro Airborne Survey
COMM disclaims any liability to such party.
COMM
COMM Where the Services have involved Fugro Airborne Survey's use of any
COMM information provided by the Client or third parties, upon which

```

COMM Fugro Airborne Survey was reasonably entitled to rely, then the
 COMM Services are limited by the accuracy of such information. Fugro
 COMM Airborne Survey is not liable for any inaccuracies (including any
 COMM incompleteness) in the said information, save as otherwise provided
 COMM in the terms of the contract between the Client and Fugro Airborne
 COMM Survey.

COMM

COMM With regard to DIGITAL TERRAIN DATA, the accuracy of the elevation
 COMM calculation is directly dependent on the accuracy of the two input
 COMM parameters laser altitude and GPS altitude. The laser and radar altitude
 COMM value may be erroneous in areas of heavy tree cover, where the
 COMM altimeters reflect the distance to the tree canopy rather than the
 COMM ground. The GPS altitude value is primarily dependent on the number of
 COMM available satellites. Although post-processing of GPS data will yield X
 COMM and Y accuracies in the order of 1-2 metres, the accuracy of the
 COMM altitude value is usually much less, sometimes in the ± 5 metre range.
 COMM Further inaccuracies may be introduced during the interpolation and
 COMM gridding process.

COMM Because of the inherent inaccuracies of this method, no guarantee is
 COMM made or implied that the information displayed is a true
 COMM representation of the height above sea level. Although this product
 COMM may be of some use as a general reference,
 COMM THIS PRODUCT MUST NOT BE USED FOR NAVIGATION PURPOSES.

COMM -----

COMM

COMM ELECTROMAGNETIC SYSTEM

COMM

COMM TEMPEST IS A TIME-DOMAIN SQUARE-WAVE SYSTEM,
 COMM TRANSMITTING AT A BASE FREQUENCY OF 25Hz,
 COMM WITH 2 ORTHOGONAL-AXIS RECEIVER COILS IN A TOWED BIRD.
 COMM FINAL EM OUTPUT IS RECORDED 5 TIMES PER SECOND.
 COMM THE TIMES (IN MILLISECONDS) FOR THE 15 WINDOWS ARE:

COMM

COMM WINDOW	START	END	CENTRE
COMM 1	0.007	0.020	0.013
COMM 2	0.033	0.047	0.040
COMM 3	0.060	0.073	0.067
COMM 4	0.087	0.127	0.107
COMM 5	0.140	0.207	0.173
COMM 6	0.220	0.340	0.280
COMM 7	0.353	0.553	0.453
COMM 8	0.567	0.873	0.720
COMM 9	0.887	1.353	1.120
COMM 10	1.367	2.100	1.733
COMM 11	2.113	3.273	2.693
COMM 12	3.287	5.113	4.200
COMM 13	5.127	7.993	6.560
COMM 14	8.007	12.393	10.200
COMM 15	12.407	19.993	16.200

COMM

COMM PULSE WIDTH: 10 ms

COMM

COMM TEMPEST EM data are transformed to the response that would be
 COMM obtained with a B-field sensor for a 100% duty cycle square
 COMM waveform at the base frequency, involving a 1A change in
 COMM current (from -0.5A to +0.5A to -0.5A) in a 1sq.m transmitter.
 COMM It is this configuration, rather than the actual acquisition
 COMM configuration, which must be specified when modelling TEMPEST data.

COMM

COMM LOCATED DATA FORMAT

COMM

COMM Output field format : ASCII ASEG-GDF

COMM

COMM FIELD	UNITS	NULL	FORMAT
------------	-------	------	--------

COMM Line		-99999999	I10
COMM Flight		-99	I4
COMM Fiducial		-999999.9	F8.1
COMM Project_FAS		-9999	I6
COMM Date		-9999999	I9
COMM Time	s	-9999.9	F8.1
COMM Bearing	deg	-99	I4
COMM Latitude	deg	-99.9999999	F12.7
COMM Longitude	deg	-999.9999999	F13.7
COMM Easting	m	-99999.99	F10.2
COMM Northing	m	-999999.99	F11.2
COMM Tx_Elevation	m	-999.99	F8.2
COMM LaserAlt	m	-999.99	F8.2
COMM DTM	m	-999.99	F8.2
COMM Mag	nT	-99999.999	F11.3
COMM Tx_Pitch	deg	-999.99	F8.2
COMM Tx_Roll	deg	-999.99	F8.2
COMM Tx_Clearance	m	-999.99	F8.2
COMM HSep_Raw	m	-999.99	F8.2
COMM VSep_Raw	m	-999.99	F8.2
COMM Tx_Clearance_std	m	-999.99	F8.2
COMM HSep_std	m	-999.99	F8.2
COMM VSep_std	m	-999.99	F8.2
COMM EMX_nonhprg_01	fT	-999.999999	F12.6
COMM EMX_nonhprg_02	fT	-999.999999	F12.6
COMM EMX_nonhprg_03	fT	-999.999999	F12.6
COMM EMX_nonhprg_04	fT	-999.999999	F12.6
COMM EMX_nonhprg_05	fT	-999.999999	F12.6
COMM EMX_nonhprg_06	fT	-999.999999	F12.6
COMM EMX_nonhprg_07	fT	-999.999999	F12.6
COMM EMX_nonhprg_08	fT	-999.999999	F12.6
COMM EMX_nonhprg_09	fT	-999.999999	F12.6
COMM EMX_nonhprg_10	fT	-999.999999	F12.6
COMM EMX_nonhprg_11	fT	-999.999999	F12.6
COMM EMX_nonhprg_12	fT	-999.999999	F12.6
COMM EMX_nonhprg_13	fT	-999.999999	F12.6
COMM EMX_nonhprg_14	fT	-999.999999	F12.6
COMM EMX_nonhprg_15	fT	-999.999999	F12.6
COMM EMX_hprg_01	fT	-999.999999	F12.6
COMM EMX_hprg_02	fT	-999.999999	F12.6
COMM EMX_hprg_03	fT	-999.999999	F12.6
COMM EMX_hprg_04	fT	-999.999999	F12.6
COMM EMX_hprg_05	fT	-999.999999	F12.6
COMM EMX_hprg_06	fT	-999.999999	F12.6
COMM EMX_hprg_07	fT	-999.999999	F12.6
COMM EMX_hprg_08	fT	-999.999999	F12.6
COMM EMX_hprg_09	fT	-999.999999	F12.6
COMM EMX_hprg_10	fT	-999.999999	F12.6
COMM EMX_hprg_11	fT	-999.999999	F12.6
COMM EMX_hprg_12	fT	-999.999999	F12.6
COMM EMX_hprg_13	fT	-999.999999	F12.6
COMM EMX_hprg_14	fT	-999.999999	F12.6
COMM EMX_hprg_15	fT	-999.999999	F12.6
COMM X_Sferics		-9999.999	F10.3
COMM X_LowFreq		-9999.999	F10.3
COMM X_Powerline		-9999.999	F10.3
COMM X_VLF1		-9999.999	F10.3
COMM X_VLF2		-9999.999	F10.3
COMM X_VLF3		-9999.999	F10.3
COMM X_VLF4		-9999.999	F10.3
COMM X_Geofact		-9999.999	F10.3
COMM EMZ_nonhprg_01	fT	-999.999999	F12.6
COMM EMZ_nonhprg_02	fT	-999.999999	F12.6
COMM EMZ_nonhprg_03	fT	-999.999999	F12.6

COMM EMZ_nonhprg_04	fT	-999.999999	F12.6
COMM EMZ_nonhprg_05	fT	-999.999999	F12.6
COMM EMZ_nonhprg_06	fT	-999.999999	F12.6
COMM EMZ_nonhprg_07	fT	-999.999999	F12.6
COMM EMZ_nonhprg_08	fT	-999.999999	F12.6
COMM EMZ_nonhprg_09	fT	-999.999999	F12.6
COMM EMZ_nonhprg_10	fT	-999.999999	F12.6
COMM EMZ_nonhprg_11	fT	-999.999999	F12.6
COMM EMZ_nonhprg_12	fT	-999.999999	F12.6
COMM EMZ_nonhprg_13	fT	-999.999999	F12.6
COMM EMZ_nonhprg_14	fT	-999.999999	F12.6
COMM EMZ_nonhprg_15	fT	-999.999999	F12.6
COMM EMZ_hprg_01	fT	-999.999999	F12.6
COMM EMZ_hprg_02	fT	-999.999999	F12.6
COMM EMZ_hprg_03	fT	-999.999999	F12.6
COMM EMZ_hprg_04	fT	-999.999999	F12.6
COMM EMZ_hprg_05	fT	-999.999999	F12.6
COMM EMZ_hprg_06	fT	-999.999999	F12.6
COMM EMZ_hprg_07	fT	-999.999999	F12.6
COMM EMZ_hprg_08	fT	-999.999999	F12.6
COMM EMZ_hprg_09	fT	-999.999999	F12.6
COMM EMZ_hprg_10	fT	-999.999999	F12.6
COMM EMZ_hprg_11	fT	-999.999999	F12.6
COMM EMZ_hprg_12	fT	-999.999999	F12.6
COMM EMZ_hprg_13	fT	-999.999999	F12.6
COMM EMZ_hprg_14	fT	-999.999999	F12.6
COMM EMZ_hprg_15	fT	-999.999999	F12.6
COMM Z_Sferics		-9999.999	F10.3
COMM Z_LowFreq		-9999.999	F10.3
COMM Z_Powerline		-9999.999	F10.3
COMM Z_VLF1		-9999.999	F10.3
COMM Z_VLF2		-9999.999	F10.3
COMM Z_VLF3		-9999.999	F10.3
COMM Z_VLF4		-9999.999	F10.3
COMM Z_Geofact		-9999.999	F10.3
COMM CND_Z_[1:100]	mS/m	-9999.999	F10.3

APPENDIX III – List of all Supplied Data and Products

Initial Raw Products (Gridded data in Georeferenced TIFF format)

- Raw Total Magnetic Intensity
- Raw CDI's for 25% of survey lines
- Raw EM Channels (X and Z) for 3 selected windows

Preliminary Gridded Products (delivered in ERMapper format GDA94 MGA52S)

- Total Magnetic Intensity
- First Vertical Derivative TMI
- Digital Terrain Model
- 15 channels of X-component
- 15 channels of Z-component
- EM Time Constant for X-component
- EM Time Constant for Z-component

Final Located Data

2146_[1-4]_Final.hdr - header file describing the contents of...

2146_[1-4]_Final.asc - flat ascii file containing located magnetic, EM and digital terrain data

2146_[1-4]_Final.gdb - Geosoft database file containing located magnetic, EM and digital terrain data

Final Gridded Products (delivered in ERMapper format GDA94 MGA52S)

- Total Magnetic Intensity
- First Vertical Derivative TMI
- Digital Terrain Model
- 15 channels of X-component
- 15 channels of Z-component
- EM Time Constant for X-component
- EM Time Constant for Z-component

Final Digital Products

- Flight Path map
- Z-Component Conductivity Depth Image (CDI) Multiplots & Stacked sections

Final Acquisition and Processing Report

Delivered as hardcopy and digitally