

Buchanan, Northern Territory Airborne Magnetic and Radiometric Geophysical Survey

for

Department of Mines and Energy Northern Territory

Acquisition and Processing Report

Prepared by : P.Chambers

L.Stenning

Authorised for release by :

.....

Survey flown: July - September 2002

by



Fugro Airborne Surveys
65 Brockway Road, Floreat. WA 6014, Australia
Tel: (61-8) 9273 6400 Fax: (61-8) 9273 6466

FAS JOB# 1527

CONTENTS

| | | |
|----------|---|-----------|
| 1 | SURVEY OPERATIONS AND LOGISTICS | 5 |
| 1.1 | Introduction | 5 |
| 1.2 | Survey Base | 5 |
| 1.3 | Flying Summary | 5 |
| 1.4 | Survey Personnel | 5 |
| 1.5 | Area Map | 6 |
| 1.6 | Survey Equipment | 7 |
| 2 | SURVEY SPECIFICATIONS AND PARAMETERS | 9 |
| 2.1 | Area Co-ordinates | 9 |
| 2.1.1 | Area 1 (NE) | 9 |
| 2.1.2 | Area 2 (NW) | 9 |
| 2.1.3 | Area 3 (SW) | 9 |
| 2.1.4 | Area 4 (SE) | 10 |
| 2.1.5 | Area 7 (Central) | 10 |
| 2.1.6 | Private Company Data | 10 |
| 2.1.7 | Private Company Data C1 +C3 (Birimba B&E) | 10 |
| 2.1.8 | Private Company Data C2 (Cattle Springs North) | 11 |
| 2.1.9 | Private Company Data C3 (Birimba B) | 11 |
| 2.1.10 | Private Company Data C4 (Cattle Springs South) | 11 |
| 2.1.11 | Private Company Data C5 (Birimba A) | 12 |
| 2.2 | Line Spacing | 12 |
| 2.3 | Line Heading | 12 |
| 2.4 | Line Kilometres Planned | 12 |
| 2.4.1 | Area 1 | 12 |
| 2.4.2 | Area 2 | 12 |
| 2.4.3 | Area 3 | 13 |
| 2.4.4 | Area 4 | 13 |
| 2.4.5 | Area 7 | 13 |
| 2.4.6 | Total Survey | 13 |
| 2.5 | Line Kilometres Flown and Processed | 13 |
| 2.5.1 | Private Company Survey | 13 |
| 2.5.2 | Total Survey (new flying + private company flying) | 13 |
| 2.6 | Survey Height | 13 |
| 2.7 | Data Sample Intervals | 13 |
| 2.8 | Survey Tolerances | 13 |
| 3 | SURVEY EQUIPMENT AND SPECIFICATIONS | 15 |
| 3.1 | Aircraft | 15 |
| 3.2 | Magnetometer and Compensator | 15 |
| 3.3 | Gamma Ray Spectrometer | 15 |
| 3.4 | Data Acquisition System | 15 |
| 3.5 | GPS Navigation System | 16 |
| 3.6 | Radar Altimeter | 16 |
| 3.7 | Temperature and Humidity Sensor | 16 |
| 3.8 | Barometer | 16 |
| 3.9 | Flight Following | 16 |
| 4 | GROUND DATA ACQUISITION EQUIPMENT AND SPECIFICATIONS | 17 |
| 4.1 | Magnetic Base Station | 17 |
| 4.1.1 | Envi-Mag | 17 |
| 4.1.2 | G-822A | 17 |
| 4.1.3 | Magnetic Base Station Locations | 17 |
| 4.2 | GPS Base Station System | 17 |
| 4.2.1 | GPS Base Station Locations | 17 |
| 5 | EQUIPMENT CALIBRATIONS AND DATA ACQUISITION CHECKS | 18 |
| 5.1 | Survey Calibrations | 18 |

| | | |
|---------------------|---|-----------|
| 5.1.1 | Dynamic Magnetometer Compensation | 18 |
| 5.1.2 | Parallax | 18 |
| 5.1.3 | Radar Altimeter Calibration Line | 19 |
| 5.1.4 | Background and Cosmic Calibration Stacks | 19 |
| 5.1.5 | Height Attenuation Calibrations | 19 |
| 5.1.6 | Daily Calibrations | 19 |
| 6 | SURVEY LINE NUMBERING SYSTEM | 21 |
| 6.1 | Survey line numbering | 21 |
| 6.1.1 | Digital data | 21 |
| 6.1.2 | Flight logs | 21 |
| 6.2 | Calibration line numbering | 22 |
| 6.2.1 | Digital data | 22 |
| 6.2.2 | Flight logs | 22 |
| 7 | DATA VERIFICATION AND FIELD PROCESSING | 23 |
| 7.1 | Field Processing Equipment | 23 |
| 7.2 | Magnetic Diurnal Data | 23 |
| 7.3 | Altimeter Data | 23 |
| 7.3.1 | Radar Altimeter Data | 23 |
| 7.3.2 | GPS Height Data | 23 |
| 7.3.3 | Barometric Altimeter Data | 23 |
| 7.3.4 | Topographical Data | 23 |
| 7.3.5 | Gridding and Inspection | 23 |
| 7.4 | Flight Path Data | 23 |
| 7.5 | Magnetic Data | 24 |
| 7.5.1 | Diurnal Correction | 24 |
| 7.5.2 | Parallax Correction | 24 |
| 7.5.3 | Preliminary Gridding and Inspection | 24 |
| 7.6 | Spectrometer Data | 24 |
| 7.6.1 | Preliminary Corrections | 24 |
| 7.6.2 | Preliminary Gridding and Inspection | 24 |
| 7.7 | Quality Control Products | 24 |
| 7.8 | Digital Archives | 25 |
| 8 | FINAL DATA PROCESSING | 26 |
| 8.1 | Aircraft Location | 26 |
| 8.2 | Magnetic Data Processing | 26 |
| 8.3 | Radiometric Data Processing | 26 |
| 8.3.1 | Energy Calibration | 27 |
| 8.3.2 | NASVD Filtering | 27 |
| 8.3.3 | Windowing and Dead-Time Correction | 27 |
| 8.3.4 | Cosmic Aircraft Background Removal | 27 |
| 8.3.5 | Atmospheric Radon | 28 |
| 8.3.6 | STP Altitude | 28 |
| 8.3.7 | Spectral Stripping | 28 |
| 8.3.8 | Height Correction | 28 |
| 8.3.9 | Ground Concentrations | 29 |
| 8.4 | Digital Elevation Model | 30 |
| 8.5 | Company areas C1 & C3 | 30 |
| 8.6 | Gridding | 30 |
| 8.7 | Merging | 30 |
| Appendix 1.: | Line listing | 31 |
| Appendix 2.: | Line Data | 31 |
| Appendix 3.: | Gridded Data | 32 |

| | |
|--|-----------|
| Appendix 4.: Height Crossover Differences | 34 |
| Appendix 5.: Flight Path Plot | 35 |
| Appendix 6.: Quality Control Plots | 36 |
| Appendix 7.: Spectrometer Calibrations | 36 |
| Appendix 8.: Flying Summary | 36 |

1 SURVEY OPERATIONS AND LOGISTICS

1.1 Introduction

Between July 2002 and September 2002 Fugro Airborne Surveys Pty. Ltd. (Fugro) undertook an airborne magnetic and radiometric survey for the Department of Mines and Energy Northern Territory (NTDME) over the Buchanan area in the central east of the Northern Territory, Australia. The Buchanan survey consists of 5 areas of new flying and 5 areas of existing private company data. Tie line data was collected over two of the existing private company areas where tie lines had not previously been flown. The survey was flown using a Cessna 210 and an Aerocommander 500S Shrike owned and operated by Fugro. This report summarises the procedures, details and equipment used by Fugro in the acquisition, verification and processing of the airborne geophysical data.

1.2 Survey Base

Due to the large size of the survey and multiple areas, two aircraft were used to fly the Buchanan survey. Aircraft VH-KAC was based out of the township of Victoria River Downs from the 17th of July 2002 until the 14th of August 2002. Aircraft VH-BNZ was based out of Kalkarindji from the 23rd of July 2002 until the 23rd of August 2002 and then out of Elliot from the 24th of August 2002 until the 24th of September 2002. The aircraft were operated from each of the survey base airports with the aircraft fuel available on site. A temporary office was set up at each of the base sites where all survey operations were run from and the post-flight data verification and processing was performed.

1.3 Flying Summary

The terrain over most of the survey areas was undulating with scrubby to sparse vegetation. The weather pattern was generally the same with clear weather every day. Most days were windy with calmer conditions in the early mornings and late evenings. Very little production was hampered by strong wind conditions or turbulence, however, several flights were abandoned or grounded due to strong diurnal activity.

1.4 Survey Personnel

The following personnel were involved on this project:

| | |
|---------------------------|--|
| Project Manager/s (Perth) | David Abbott Katherine M ^c Kenna |
| Data Processing (Perth) | Peter Chambers |


VH-BNZ

| | |
|-----------------------|----------------------------|
| On-site Crew Leader/s | Tom Jenkins |
| Pilots | James Gibbs Dan Pitic |
| System Operators | Tom Jenkins Dave Little |

VH-KAC


| | |
|-----------------------|------------------------------|
| On-site Crew Leader/s | Mark Devenish |
| Pilots | Rod Jamieson Melanie Cote |
| System Operators | Mark Devenish Rob Doepel |

1.5 Area Map

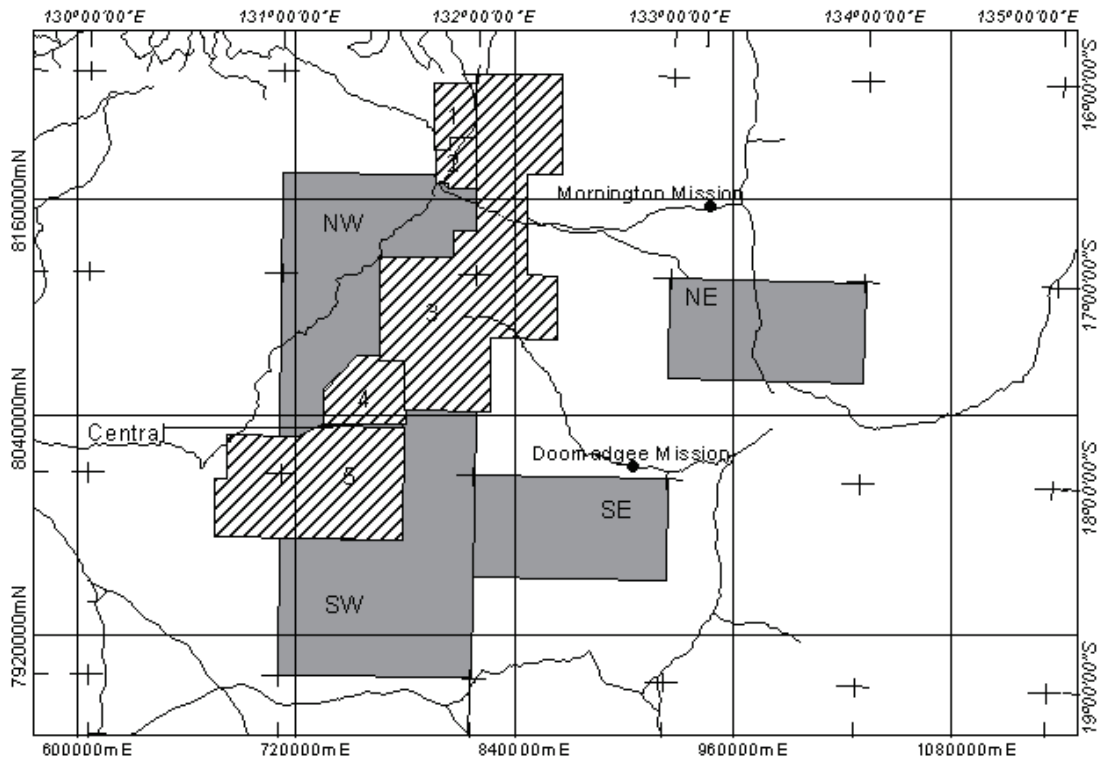

Northern Territory Geological Survey
Buchanan Survey
Airborne Geophysical Survey

Datum: GDA94
Projection: MGA
Zone: 52



NTGS Flying: NE, NW, SE, SW, Central
Private Sector Surveys: 1 - Birrimba E
2 - Cattle Springs North
3 - Birrimba B
4 - Cattle Springs South
5 - Birrimba A

1.6 Survey Equipment

VH-BNZ

Survey Platform

Aircraft - Cessna 210R
Registration - VH-BNZ

Data Acquisition System

Model - FUGRO DAS (in-house developed)

Compensator

Model : RMS Instruments Automatic Aeromagnetic Digital Compensator

Magnetometer Sensor

Model : Scintrex CS-2 Cesium Vapour Magnetometer
Mounting : Tail Stinger

Vector Magnetometer

Model : Billingsley TFM100-IE (3-axis fluxgate)

Gamma-Ray Spectrometer

Model : Exploranium GR820 Self Calibrating Spectrometer
Detectors : 8 All Viewing NaI (TI activated) Crystals
Total Crystal Volume : 33.56 Litres

Aircraft GPS Navigation

Model : Novatel 951R

Radar Altimeter

Model : Collins ALT-55B

Temperature/Humidity

Model : Vaisala HMD 50Y

Pressure

Model : Vaisala PTB 200A

Base Station Magnetometers

Model : Scintrex Envi-Mag (Primary)
: Scintrex Envi-Mag (Backup)

Base GPS

Model : Marconi OEM Allstar

VH-KAC

Survey Platform

Aircraft - Aerocommander 500S Shrike
Registration - VH-KAC

Data Acquisition System

Model - FUGRO DAS (in-house developed)

Compensator

Model : RMS Instruments Automatic Aeromagnetic Digital Compensator

Magnetometer Sensor

Model : Geometrics G-822A Caesium Vapour Magnetometer
Mounting : Tail Stinger

Vector Magnetometer

Model : Billingsley TFM100-IE (3-axis fluxgate)

Gamma-Ray Spectrometer

Model : Exploranium GR820 Self Calibrating Spectrometer
Detectors : 8 All Viewing NaI (TI activated) Crystals
Total Crystal Volume : 33.56 Litres

Aircraft GPS Navigation

Model : Omnistar LR12

Radar Altimeter

Model : Collins ALT55

Temperature/Humidity

Model : Testo

Pressure

Model : Rosemount 1214M

Base Station Magnetometers

Model : Geometrics G-822A cesium vapour (Primary)
Scintrex Envi-Mag (Backup)

Base GPS

Model : Marconi OEM Allstar

2 SURVEY SPECIFICATIONS AND PARAMETERS

2.1 Area Co-ordinates

For the purposes of flight planning the survey area was planned and flown in the WGS84 datum.

The new flying areas are referred to by the letters "NE", "NW", "SE", "SW" and "Central" in the file names. "Buchanan Central" is a narrow strip flown to fill a gap between company surveys 4 & 5. The NW, SW and Central areas were planned and processed in MGA52 and the NE and SE areas were planned and processed in MGA53.

(Note - Co-ordinates in Geodetic Datum of Australia 1994)

2.1.1 Area 1 (NE)

The NE area is located on the following 1:250,000 map sheet:

SE53_5 Newcastle Waters & SE53-6 Beetaloo

And is bounded by the following map boundary:

| | | |
|----------|------------------|------------------|
| Corner 1 | -17° 29' 59.726" | 132° 59' 32.879" |
| Corner 2 | -17° 30' 00.136" | 134° 00' 27.125" |
| Corner 3 | -17° 00' 00.132" | 134° 00' 27.052" |
| Corner 4 | -16° 59' 59.734" | 132° 59' 32.953" |
| Corner 5 | -17° 29' 59.726" | 132° 59' 32.879" |

2.1.2 Area 2 (NW)

The NW area is located on the following 1:250,000 map sheets:

SE52_4 Victoria River Downs & SE52_8 Wave Hill

and is bounded by the following map boundary:

| | | |
|-----------|------------------|------------------|
| Corner 1 | -17° 50' 00.278" | 130° 59' 32.845" |
| Corner 2 | -17° 49' 59.707" | 131° 06' 27.171" |
| Corner 3 | -17° 44' 59.312" | 131° 13' 01.091" |
| Corner 4 | -17° 34' 59.318" | 131° 13' 01.035" |
| Corner 5 | -17° 24' 59.675" | 131° 23' 27.107" |
| Corner 6 | -17° 24' 59.657" | 131° 31' 27.106" |
| Corner 7 | -16° 54' 59.669" | 131° 30' 27.032" |
| Corner 8 | -16° 54' 59.618" | 131° 53' 27.031" |
| Corner 9 | -16° 46' 59.621" | 131° 53' 27.011" |
| Corner 10 | -16° 46' 59.606" | 132° 00' 27.011" |
| Corner 11 | -16° 33' 59.611" | 132° 00' 26.979" |
| Corner 12 | -16° 33' 59.633" | 131° 50' 26.980" |
| Corner 13 | -16° 33' 00.000" | 131° 50' 00.018" |
| Corner 14 | -16° 32' 59.639" | 131° 47' 26.978" |
| Corner 15 | -16° 29' 59.643" | 131° 46' 26.971" |
| Corner 16 | -16° 30' 00.258" | 130° 59' 33.037" |
| Corner 17 | -17° 50' 00.278" | 130° 59' 32.845" |

2.1.3 Area 3 (SW)

The SW area is located on the following 1:250,000 map sheet:

SE52_8 Wave Hill & SE52_12 Winnecke Creek

and is bounded by the following map boundary:

| | | |
|----------|------------------|------------------|
| Corner 1 | -19° 00' 00.295" | 130° 59' 32.664" |
| Corner 2 | -18° 59' 59.556" | 132° 00' 27.362" |

| | | |
|----------|------------------|------------------|
| Corner 3 | -17° 39' 59.596" | 132° 00' 27.144" |
| Corner 4 | -17° 40' 00.362" | 131° 37' 32.893" |
| Corner 5 | -18° 19' 00.375" | 131° 37' 32.796" |
| Corner 6 | -18° 19' 00.285" | 130° 59' 32.772" |
| Corner 7 | -19° 00' 00.295" | 130° 59' 32.664" |

2.1.4 Area 4 (SE)

The SE area is located on the following 1:250,000 map sheets:

SE53_9 South Lake Woods

and is bounded by the following map boundary:

| | | |
|----------|------------------|------------------|
| Corner 1 | -18° 29' 59.567" | 131° 59' 32.722" |
| Corner 2 | -18° 30' 00.288" | 133° 00' 27.257" |
| Corner 3 | -18° 00' 00.280" | 133° 00' 27.280" |
| Corner 4 | -17° 59' 59.578" | 131° 59' 32.803" |
| Corner 5 | -18° 29' 59.567" | 131° 59' 32.722" |

2.1.5 Area 7 (Central)

The Central area is located on the following 1:250,000 map sheets:

SE52_8 Wave Hill

and is bounded by the following map boundary:

| | | |
|----------|------------------|------------------|
| Corner 1 | -17° 46' 50.513" | 131° 12' 26.107" |
| Corner 2 | -17° 46' 30.724" | 131° 39' 00.973" |
| Corner 3 | -17° 44' 20.705" | 131° 38' 59.058" |
| Corner 4 | -17° 44' 40.451" | 131° 12' 24.511" |
| Corner 5 | -17° 46' 50.513" | 131° 12' 26.107" |

2.1.6 Private Company Data

The company surveys are named as follows:

| Original Survey Name | New Survey Name |
|----------------------|-----------------|
| Birimba E | company1 (C1) |
| Cattle Springs North | company2 (C2) |
| Birimba B | company3 (C3) |
| Cattle Springs South | company4 (C4) |
| Birimba A | company5 (C5) |

For the purposes of processing Birimba E was merged with Birimba B as the surveys were adjoining and all parameters were the same, thus C1 is now part of C3 and is treated as part of the C3 data set.

The "company data" is bounded by the NW and SW data.

For the company C1, C3 and C5 areas no tie lines were flown in the original surveys. To enable processing of the magnetic data a set of tie lines were flown. The tie line data collected conformed entirely to the new flying specifications apart from flying height (flown at 60 metres to match original data) and line spacing. The format of the tie line located data matches the rest of the new flying data. Tie lines were flown over the full extent of the C1 and C3 data. Data processing was only done over data in the C1 and C3 areas west of 132°.

2.1.7 Private Company Data C1 +C3 (Birimba B&E)

The company area of C1 merged with C3 is located on the following 1:250,000 map sheet:

SE52_4 Victoria River Downs

and is bounded by the following map boundary:

| | | |
|----------|--------|---------|
| Corner 1 | 796133 | 8186887 |
| Corner 2 | 804633 | 8186683 |
| Corner 3 | 804633 | 8194065 |
| Corner 4 | 821133 | 8193835 |
| Corner 5 | 821133 | 8223359 |
| Corner 6 | 796133 | 8223665 |

2.1.8 Private Company Data C2 (Cattle Springs North)

The company area C2 is located on the following 1:250,000 map sheet:

SE52_8 Wave Hill

and is bounded by the following map boundary:

| | | |
|----------|--------|---------|
| Corner 1 | 796900 | 8168100 |
| Corner 2 | 804100 | 8168100 |
| Corner 3 | 804100 | 8165900 |
| Corner 4 | 821100 | 8165900 |
| Corner 5 | 821100 | 8194300 |
| Corner 6 | 804170 | 8194300 |
| Corner 7 | 804170 | 8186900 |
| Corner 8 | 796900 | 8186900 |

2.1.9 Private Company Data C3 (Birimba B)

The company area C3 is located on the following 1:250,000 map sheet:

SE52_4 Victoria River Downs, SE52_8 Wave Hill, SE53_1 Daly Waters & SE53_5 Newcastle Waters

and is bounded by the following map boundary:

| | | |
|-----------|--------|---------|
| Corner 1 | 819951 | 8142152 |
| Corner 2 | 806615 | 8142350 |
| Corner 3 | 806615 | 8127584 |
| Corner 4 | 766430 | 8128130 |
| Corner 5 | 766430 | 8070929 |
| Corner 6 | 779479 | 8070738 |
| Corner 7 | 779479 | 8043056 |
| Corner 8 | 827251 | 8042332 |
| Corner 9 | 827251 | 8082945 |
| Corner 10 | 863377 | 8082346 |
| Corner 11 | 863377 | 8117429 |
| Corner 12 | 847136 | 8117732 |
| Corner 13 | 847136 | 8173117 |
| Corner 14 | 865873 | 8172822 |
| Corner 15 | 865873 | 8228215 |
| Corner 16 | 819951 | 8228904 |

2.1.10 Private Company Data C4 (Cattle Springs South)

The company area C4 is located on the following 1:250,000 map sheet:

SE52_8 Wave Hill

and is bounded by the following map boundary:

| | | |
|----------|--------|---------|
| Corner 1 | 734800 | 8035500 |
| Corner 2 | 780300 | 8035500 |
| Corner 3 | 780300 | 8073200 |
| Corner 4 | 753175 | 8073200 |
| Corner 5 | 734800 | 8052720 |

2.1.11 Private Company Data C5 (Birimba A)

The company area C5 is located on the following 1:250,000 map sheet:

SE52_8 Wave Hill & SE52_12 Winnecke Creek

and is bounded by the following map boundary:

| | | |
|----------|--------|---------|
| Corner 1 | 721183 | 8028927 |
| Corner 2 | 681852 | 8029422 |
| Corner 3 | 681852 | 8005442 |
| Corner 4 | 674512 | 8005507 |
| Corner 5 | 674512 | 7974148 |
| Corner 6 | 778482 | 7972926 |
| Corner 7 | 779382 | 8033829 |
| Corner 8 | 733382 | 8034421 |

2.2 Line Spacing

New Flying

Areas 1-4 & 7

| | | |
|-----------------------|---|--------|
| Traverse line spacing | - | 400 m |
| Tie line spacing | - | 4000 m |

Private Company Data
C2 & C4

| | | |
|-----------------------|---|--------|
| Traverse line spacing | - | 200 m |
| Tie line spacing | - | 2000 m |

C3 & C5

| | | |
|-----------------------|---|--------|
| Traverse line spacing | - | 250 m |
| Tie line spacing | - | 8000 m |

2.3 Line Heading

| | | |
|-----------------------|---|-------------------------------------|
| Traverse line heading | - | 000°/180° (all areas except area 7) |
| Tie line heading | - | 090°/270° (all areas except area 7) |

Area 7

| | | |
|-----------------------|---|-----------|
| Traverse line heading | - | 090°/270° |
| Tie line heading | - | 000°/180° |

2.4 Line Kilometres Planned

(Note – distances include overfly)

2.4.1 Area 1

| | |
|------------------------|------------|
| Traverse line distance | 15642.3 km |
| Tie line distance | 1651.0 km |
| Total distance | 17293.3 km |

2.4.2 Area 2

| | |
|------------------------|------------|
| Traverse line distance | 23300.0 km |
| Tie line distance | 2352.7 km |

Total distance 25652.7 km

2.4.3 Area 3

Traverse line distance 28428.9 km
 Tie line distance 2946.8 km
 Total distance 31375.7 km

2.4.4 Area 4

Traverse line distance 15470.9 km
 Tie line distance 1640.8 km
 Total distance 17111.7 km

2.4.5 Area 7

Traverse line distance 519.2 km
 Tie line distance 59.9 km
 Total distance 579.1 km

2.4.6 Total Survey

Traverse line distance 73361.3 km
 Tie line distance 7010.4 km
 Total distance 80371.7 km

2.5 Line Kilometres Flown and Processed

2.5.1 Private Company Survey

Traverse line distance 80705 km
 Tie line distance 3429 km
 Total distance 84134 km

2.5.2 Total Survey (new flying + private company flying)

Traverse line distance 154066 km
 Tie line distance 10439 km
 Total distance 164505 km

2.6 Survey Height

Mean survey height - Nominal 80m A.G.L. (areas 1-4)
 - Nominal 60 m A.G.L (areas 7, C1-C5)

2.7 Data Sample Intervals

Data sample intervals calculated on a nominal aircraft speed of 265 km/h.

Magnetometer - 70 m (@10 Hz)
 Radar altimeter - 70 m (@10 Hz)
 Temperature - 70 m (@1 Hz)
 Pressure - 70 m (@1 Hz)
 GPS - 70 m (@1 Hz)
 Spectrometer - 70 m (@1 Hz)
 Magnetic base station Envi-mag - 2 & 5 s
 (see section 4.1) G822A - 2 s
 G-856 - 5 s

2.8 Survey Tolerances

As specified in the contract the following tolerances were used:

Traverse line deviation - 5 % of nominated line spacing over 2 km or more
 Tie line deviation - 0.5 % of nominated tie line spacing over 2 km or more
 Terrain clearance deviation - +/-10 m of nominal terrain clearance over 2 km or more
 Total magnetometer system noise - More than 0.1 nT continuously over 1 km or more
 Traverse line diurnal variation - More than 5 nT in 5 minutes

- Tie line diurnal variation - More than 5 nT in 5 minutes
- Diurnal noise - More than 0.5 nT for 5 minutes or more

3 SURVEY EQUIPMENT AND SPECIFICATIONS

3.1 Aircraft

(VH-BNZ)

| | | |
|--------------|---|------------------------|
| Manufacturer | - | Cessna |
| Model | - | 210 R |
| Registration | - | VH-BNZ (Australia) |
| Ownership | - | Fugro Airborne Surveys |

(VH-KAC)

| | | |
|--------------|---|------------------------|
| Manufacturer | - | Aerocommander Shrike |
| Model | - | 500S |
| Registration | - | VH-KAC (Australia) |
| Ownership | - | Fugro Airborne Surveys |

3.2 Magnetometer and Compensator

A Scintrex CS-2 magnetometer sensor (VH-BNZ) and a Geometrics G822A magnetometer sensor (VH-KAC), mounted in a stinger secured to the rear of the aircraft were used for this survey.

The magnetometer sensor was coupled to an RMS Instruments Automatic Aeromagnetic Digital Compensator (AADC). The AADC compensates the total magnetic field data in real time for the magnetic effect of the aircraft manoeuvring with respect to the earth's magnetic field. This effect comprises permanent magnetism, induced magnetism and eddy current effects.

The correction coefficients used by the AADC during compensation were calculated from a compensation flight conducted prior to the survey commencing, or at any other time deemed necessary.

3.3 Gamma Ray Spectrometer

An Exploranium GR-820 multi-channel gamma-ray spectrometer, coupled to two GPX crystal detectors, was used for this survey. The crystal detectors were secured to a rack on the floor of the aircraft.

The GR-820 uses a sophisticated automatic control method to ensure crystal alignment is maintained, while stabilising on naturally occurring isotopes. The system continuously monitors each of the eight crystal signals and accumulates an individual spectrum for each configured crystal. The peak channel of the selected stabilisation isotope is computed when a specified number of counts have been accumulated. This peak channel is then compared to the correct peak location and the gain is subsequently adjusted.

Two hundred and fifty six channels of data between 0.3 MeV and 3.0 MeV were recorded once per second. Additionally, 4 ROIs and a cosmic channel were recorded using the following window limits:

| | | |
|---|---|-----------------|
| Total Count | : | 0.41 - 2.81 MeV |
| Potassium (K ₄₀ peak at 1.460 MeV) | : | 1.37 - 1.57 MeV |
| Uranium (Bi ₂₁₄ peak at 1.765 MeV) | : | 1.66 - 1.86 MeV |
| Thorium (Tl ₂₀₈ peak at 2.614 MeV) | : | 2.41 - 2.81 MeV |
| Cosmic | : | 4.00 - 6.00 MeV |

The calibration procedures for the gamma-ray spectrometer are described in Section 5.

3.4 Data Acquisition System

The FUGRO digital acquisition system runs on a personal computer. The data were recorded to hard disk and dumped to disk at the completion of each flight. The system was synchronised to GPS time. The data were viewed in real time, enabling the operator to confirm that quality specifications were being met. The following parameters were recorded digitally.

- a) Time in seconds (to 0.1 seconds)
- b) Fiducial number, incrementing by smallest data sample interval
- c) Navigation data including GPS height
- d) Terrain clearance (radar altimeter)
- e) Barometric pressure
- f) Relative humidity
- g) Ambient temperature outside the aircraft in degrees Celsius
- h) Uncompensated Total Magnetic Intensity (TMI) reading

- i) Fluxgate axes X, Y & Z
- j) Compensated TMI reading
- k) Full 256-channel gamma-ray spectrum
- l) Total count reading in counts per second (uncorrected)
- m) Potassium window reading in counts per second (uncorrected)
- n) Uranium window reading in counts per second (uncorrected)
- o) Thorium window reading in counts per second (uncorrected)
- p) Cosmic window reading in counts per second (uncorrected)
- q) Spectrometer live time
- r) Number of satellites
- s) Position dilution of precision

3.5 GPS Navigation System

The GPS position referencing WGS84 is read by the FUGRO digital acquisition system. The navigational errors, with reference to the planned survey line, are then calculated and displayed for the pilot and operator. This completes the cycle. Two navigation cycles are performed each second. Real time differential correction was achieved via Fugro Surveys OmniSTAR System.

3.6 Radar Altimeter

A Collins ALT-55B Radar Altimeter was used to measure the aircraft height above ground level (AGL). The radar altimeter system is of high resolution designed for automatic continuous operation over a wide variation of terrain, target reflectivity, weather and aircraft altitude.

The radar altimeter data were recorded 10 times per second with an accuracy of ± 1 m (at 80 m AGL).

3.7 Temperature and Humidity Sensor

A Vaisala HMD 50Y (VH-BNZ) and a Testo (VH-KAC) Sensor was used to measure outside air temperature and relative humidity. The data were recorded once per second.

3.8 Barometer

Atmospheric pressure was measured using a Vaisala PTB 200A (VH-BNZ) and a Rosemount 1214M (VH-KAC) Digital Barometer that was tapped into the aircraft static system. The barometric data were recorded once per second.

3.9 Flight Following

An integral part of the Safety Management System provides for the installation of a Flight Following System that transmits a position via satellite at pre determined intervals. The Fugro EagleStar Flight Following System is fitted to all Fugro aircraft and for the Buchanan survey, position information was transmitted every 4 minutes to FUGRO's premises in Perth. This information can be monitored by accessing the FUGRO web page where the updated flight path is displayed. In the event that positional information from the aircraft is lost for a period exceeding 12 minutes or three consecutive transmissions, an alarm is raised and a SMS text message sent to nominated contacts and the Emergency Response plan implemented.

4 GROUND DATA ACQUISITION EQUIPMENT AND SPECIFICATIONS

4.1 Magnetic Base Station

Three Scintrex Envi-Mags and a G-822A caesium vapour base station magnetometer were used to monitor the magnetic diurnal variation. All magnetometers were synchronised to the local time base of the aircraft survey system GPS prior to surveying each day. For flights 1-35 (VH-KAC) the magnetic base stations were set-up at the Victoria River Downs airport with the Geometrics G822A being used as the primary base station from which all diurnal data used in processing for the survey was taken. For flights 1-44 (VH-BNZ) the magnetic base stations were set up at Kalkarindji and for flights 36-56 (VH-KAC) and flights 45-76 (VH-BNZ) the magnetic base stations were set-up at the airstrip at Elliot. Prior to positioning the base stations a mini-survey was conducted to establish a magnetically low gradient area. A base value for the primary base station was calculated and used in all locations in the diurnal correction of the magnetic data.

4.1.1 Envi-Mag

| | |
|-----------------|---|
| Model | - Scintrex Envi-Mag Caesium vapour magnetometer |
| Operating range | - 20,000 – 90,000 nT |
| Sensitivity | - 0.002 nT @ 1 Hz |
| Sample rate | - 2 sec |

4.1.2 G-822A

| | |
|-----------------|--|
| Model | - Geometrics G-822A cesium vapour magnetometer |
| Operating range | - 20,000 – 90,000 nT |
| Sensitivity | - 0.002 nT @ 1 Hz |
| Sample rate | - 1 sec |

4.1.3 Magnetic Base Station Locations

Base station locations are given in the GDA94 datum.

| Base | Longitude | Latitude | Base value |
|----------------------|------------|------------|------------|
| Victoria River Downs | 131° 00.7' | -16° 24.1' | 48935 nT |
| Kalkarindji | 130° 48.5' | -17° 31.4' | 49625 nT |
| Elliot | 133° 31.5' | -17° 42.7' | 49625 nT |

4.2 GPS Base Station System

The GPS base system comprises a GPS receiver, a logging computer, an antenna and a UPS system to avoid down time if power fails or fluctuates. The GPS receiver is connected to the PC via a serial COM connector.

Data is logged using proprietary software and displayed in real-time on the screen. Logged base data is processed in conjunction with the airborne GPS data to calculate the post-processed differential position of the aircraft.

Proprietary software is used to display and calculate flight path of the aircraft and altitude clearance.

4.2.1 GPS Base Station Locations

A Marconi OEM Allstar GPS base logging station was set up at each of the survey base offices with the GPS antenna set in the following positions. Co-ordinates are in the WGS84 datum.

| Base | Longitude | Latitude | Height |
|----------------------|--------------------|-------------------|----------|
| Victoria River Downs | 131° 00' 57.284" E | 16° 24' 11.264" S | 149.66 m |
| Kalkarindji | 130° 49' 47.729" E | 17° 26' 50.582" S | 207.40 m |
| Elliot | 133° 31' 38.291" E | 17° 31' 11.736" S | 286.00 m |

5 EQUIPMENT CALIBRATIONS AND DATA ACQUISITION CHECKS

5.1 Survey Calibrations

A series of calibrations were performed as follows:

5.1.1 Dynamic Magnetometer Compensation

The compensation sequences were flown in a region of low magnetic relief. The aircraft's altitude was 10,000 feet (above mean sea level). Each sequence consisted of a series of manoeuvres performed on each of the cardinal headings. The manoeuvres comprised ± 10 degree rolls, ± 5 degree pitches and ± 5 degree yaws. The coefficients are used in compensating for the effects of permanent magnetism, induced magnetism, eddy currents and heading error were calculated automatically by the AADC upon completion of a sequence. The calculated coefficients were then applied to the uncompensated total field readings (collected during the sequence) in order to assess the quality of the "solution". The (now compensated) data were then statistically analysed. The resultant statistics, revealing the quality of the compensation solution, are displayed by the AADC. The statistics include: standard deviation of the high-passed uncompensated TMI (UNC), standard deviation of the high-passed compensated TMI (CMP), improvement ratio (IR) and "vector norm of the interference set" (NRM). The IR is the result of dividing UNC by CMP. A three-axes fluxgate magnetometer mounted in the stinger, enables derivation of motion information by the AADC during a sequence.

Compensation sequences were flown on the following dates:

| Date flown | Flights covered |
|---------------|-----------------|
| VH-KAC | |
| 17/07/02 | 1 to 11 |
| 26/07/02 | 12 to 26 |
| 11/08/02 | 27 to 42 |
| 27/08/02 | 43 to 47 |
| 30/08/02 | 48 to 56 |
| VH-BNZ | |
| 25/07/02 | 2 to 19 |
| 09/08/02 | 20 to 44 |
| 28/8/02 | 45 to 56 |
| 04/09/02 | 57 to 66 |
| 14/09/02 | 67 to 76 |

5.1.2 Parallax

Parallax error is caused by the physical difference in distance between the various sensors, the electronic delay and software timing in the acquisition system. Hence all variables are subjected to a displacement from the GPS co-ordinates. If these variables are processed without a position offset a parallax error will usually occur. The most suitable way to treat this problem is to use the 1 second radiometric data as a base with a zero correction. This will prevent interpolation of important variables (a filtering process). The co-ordinates were moved by linear interpolation and other data variables were displaced onto the radiometric data, without change.

5.1.2.1 Spectrometer


The spectrometer data were not parallaxed but a correction was made by applying a parallax to the co-ordinate data. This parallax was computed using a section of lines from a previous job with a spacing of 100 metres and regriding the data until the appropriate amount of parallax was applied. The parallax correction was checked on the current job to verify it was being correctly applied.

5.1.2.2 Magnetometer

The magnetometer parallax was computed using a section of lines from a previous job with a spacing of 100 metres and regriding the data until the appropriate amount of parallax was applied. The parallax correction was checked on the current job to verify it was being correctly applied.

5.1.2.3 Barometric and Radar Altimeter Parallax

In order for processing to accurately determine the parallax error associated with the barometric and radar altimeter data a parallax test line was flown. This line consisted of five sharp swoops between 600 ft and 400 ft. Starting at an altitude of 600 ft the aircraft sharply descended to 400 ft, then ascended upward to 600 ft, levelling off for a few seconds before repeating this a further four times.

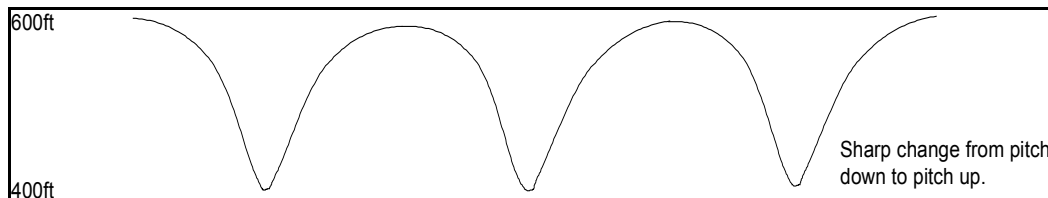

5.1.2.4 Data parallaxes

| Data | Parallax VH-BNZ | Parallax VH-KAC |
|----------------|-----------------|-----------------|
| Radiometrics | 0 second | 0 second |
| GPS easting | -0.5 second | -0.5 second |
| GPS northing | -0.5 second | -0.5 second |
| GPS height | -0.5 second | -0.5 second |
| Magnetics | 0 second | 0.1 second |
| Radar altitude | -0.4 second | -0.4 second |
| Pressure | 0.6 second | -0.4 seconds |
| Temperature | -0.5 second | -0.5 second |

5.1.3 Radar Altimeter Calibration Line

Height above the terrain is measured using a radar altimeter. The output voltage from the radar altimeter unit is recorded along with the survey data in the digital acquisition system binary files. A look-up table is used to convert this output voltage into an altitude in metres. The lookup table is computed by recording the output voltage at various heights above the ground as indicated on the radar altimeter display.

5.1.4 Background and Cosmic Calibration Stacks

Radiometric data recorded by the GR-820 is contaminated by various non-terrestrial sources. In order to provide an accurate representation of terrestrial (or natural) radiometric content these other sources must be identified and removed. This was done by flying a series of high level test lines over the ocean. Fixed barometric altitudes were flown for 5 minutes from 1000 ft above sea level (ASL) ascending at 2000 ft intervals up to and including 9000 ft ASL. then descending in the same manner.

5.1.5 Height Attenuation Calibrations

Gamma -rays are attenuated by air at approximately an exponential rate. It is therefore essential that corrections for aircraft altitude are incorporated into processing procedures. In order to correct for varying aircraft altitude and to accurately convert airborne counts into ground concentrations of potassium, uranium and thorium a series of height attenuation, or low level stacks, were flown. Over a calibration test line the stacks were flown starting at 150 ft and incrementing at 50 ft intervals to 450 ft, then 1000 ft, 1500 ft and 2000 ft with data recorded for 300 seconds at each level.

5.1.6 Daily Calibrations

A set of daily calibrations were performed each survey day as follows:

5.1.6.1 Magnetic Base Station Time Check

Prior to each days survey all magnetic base stations were time checked and synchronised with the time on the aircraft survey system GPS receiver. The temporal drift over a typical survey day of approximately 12 hours, was determined to be on the order of 1 second or less for all mag base stations.

5.1.6.2 Spectrometer Resolution Tests

Internal quality control of the gamma ray spectrometer relies on continually monitoring the resolution and peak positions of individual crystals. Prior to and after each days survey a thorium source was placed on the GR-820 crystal pack in a designated location at least 40 cm from each detector pack with 120 seconds of resolution test data recorded. Refer to Appendix 7 for results.

5.1.6.3 Spectrometer Button Tests

Hand sample checks were performed on the spectrometer before and after each days survey acquisition. Each sample was placed in a predetermined location and data recorded for 60 sec. Relative thorium channel count rates above background were within +/- 5% of the average sample checks for the duration of the survey.

5.1.6.4 Low Level Test line

To monitor the effects of soil moisture and radon and to verify the system was functioning correctly a low level test line was flown in a constant direction at survey altitude for 5 km prior to and after each days production. The collected data was checked by the operator to ensure the total count and Th. for the low level test line was within +/- 10% of the initial average.

There were 4 designated low level test lines for the Buchanan survey. The co-ordinates are in the GDA94 datum.

| Aircraft | Flights | Mean start | | Mean end | |
|----------|---------|--------------|--------------|--------------|--------------|
| | | Longitude | Latitude | Longitude | Latitude |
| VH-KAC | 1 – 35 | 131° 02' 38" | -16° 28' 07" | 131° 02' 39" | -16° 23' 38" |
| VH-KAC | 36 – 56 | 133° 31' 45" | -17° 32' 14" | 133° 29' 03" | -17° 27' 35" |
| VH-BNZ | 1 – 44 | 130° 52' 34" | -17° 27' 38" | 130° 55' 31" | -17° 23' 08" |
| VH-BNZ | 45 – 76 | 133° 29' 03" | -17° 32' 14" | 133° 29' 03" | -17° 27' 35" |

6 SURVEY LINE NUMBERING SYSTEM

The following line numbering formula was employed for this survey, only the first 4 digits of the cal line numbers and the first 5 survey line numbers are shown, see sections 0 and 6.2 for additional explanation:

| Line No./Range | Type | Duration | Frequency | Comments |
|----------------|---------------------|--------------|---------------------|---------------------|
| 1501 | Thorium source | 180 seconds | Daily | A.M. spec. calcs |
| 1504 | Background | 180 seconds | Daily | A.M. spec. calcs |
| 1508 | Low level test line | ~5 km | Daily | A.M. spec. calcs |
| | | | | |
| 1601 | Thorium source | 180 seconds | Daily | P.M. spec. calcs |
| 1604 | Background | 180 seconds | Daily | P.M. spec. calcs |
| 1608 | Low level test line | ~5 km | Daily | P.M. spec. calcs |
| | | | | |
| | | | | |
| 1800-1810 | Heading checks | As required | Survey commencement | |
| 1811-1820 | Comp box | ~260 seconds | As required | |
| 1826-1830 | Parallax checks | As required | Survey commencement | |
| | | | | |
| 1831-1845 | High level spec | 300 seconds | Annually | Over water |
| 1850-1865 | Low level spec | 5 km | Annually | Carnamah test range |
| 1870-1874 | Pad calcs pack #1 | 300 seconds | Annually | Bg, K, U, Th |
| 1875-1879 | Pad calcs pack #2 | 300 seconds | Annually | Bg, K, U, Th |
| | | | | |
| 1881-1890 | Altimeter checks | As required | Survey commencement | |
| | | | | |
| | | | | |
| 10001-10273 | Traverse line | As required | | MGA zone 53 |
| 20001-20279 | Traverse line | As required | | MGA zone 52 |
| 30001-30275 | Traverse line | As required | | MGA zone 52 |
| 40001-40272 | Traverse line | As required | | MGA zone 53 |
| 70001-70011 | Traverse line | As required | | MGA zone 52 |
| 17001-17015 | Tie line | As required | | MGA zone 53 |
| 37001-37038 | Tie line | As required | | MGA zone 52 |
| 47001-47015 | Tie line | As required | | MGA zone 53 |
| 77001-77012 | Tie line | As required | | MGA zone 52 |

6.1 Survey line numbering

6.1.1 Digital data

All survey lines are stored as 6 digit integers in the digital data and take the form ANNNNP where:

- A - Area number: for this survey a 1 indicates the line was flown as part of area 1 and a 2 indicates the line was flown as part of area 2 etc
- NNNN- Line number: if the 1st digit is a 7 then the line is a tie line. e.g. **201400** is traverse line 140 from area 2, **470130** is tie line 13 from area 4.
- P - Attempt number: if a line is scrubbed and re-flown or flown in multiple parts the attempt number will be increment by 1. e.g. 2003**12** indicated the 3rd attempt for line 0031 from area 2.

6.1.2 Flight logs

Survey lines written in the flight logs are written in the form SANNNN.PD where:

- S - Alphabetic descriptor: " " indicates a traverse line, "T" indicates a tie line, "S" indicates a scrubbed line.
- A - Area number
- NNNN- Line number

- . - Decimal point
- P - Attempt number
- D - Direction: **N**orth, **S**outh, **E**ast or **W**est.

6.2 Calibration line numbering

6.2.1 Digital data

All calibration lines are stored as 8 digit integers in the digital data and take the form ANNNPFFF where:

- A - Area number: this is not important for a calibration line and is generally 1 for most calibration lines regardless of which block was being flown.
- NNN - Line number: as per the line number description table.
- P - Attempt number: unlike survey lines there are no part calibration lines
- FFF - Flight number: the flight number is appended to the line number as calibration lines are repeated during the survey.

6.2.2 Flight logs

Calibration lines written in the flight logs are written in the form SANNNN.PD where:

- S - Alphabetic descriptor: "C" indicates a calibration line, "S" indicates a scrubbed line.
- A - Area number
- NNNN- Line number
- . - Decimal point
- P - Attempt number
- D - Direction: **N**orth, **S**outh, **E**ast or **W**est.

7 DATA VERIFICATION AND FIELD PROCESSING

All data verification and processing was conducted at the field offices, which were established on site at Victoria River Downs, Kalkarindji and Elliot for the duration of the survey. At the conclusion of each days survey all magnetic, spectrometer, altimeter, flight path and diurnal data was down-loaded onto the field office computer for preliminary verification.

7.1 Field Processing Equipment

IBM compatible Pentium computer with CD-ROM drive.

HP Pentium notebook.

Canon bubble jet printer.

7.2 Magnetic Diurnal Data

Diurnal data recorded every second (G-822A) or 2 seconds (envi) from the primary base station was down-loaded from the magnetometer's base logging computer onto the field processing computer. The data was then checked for spikes and erroneous readings. If invalid diurnal data occurred whilst survey data was being acquired the affected section was re-flown. The diurnal data was also checked to see that the change in diurnal readings during the course of the survey did not exceed the specified tolerances described in section 2.8. When this occurred the affected part of the survey line was re-flown. The diurnal data was merged with the aircraft data and used in the verification of the magnetic data. Diurnal data recorded by the backup base station was also down-loaded onto the field processing computer.

7.3 Altimeter Data

Radar altimeter, barometric altimeter and GPS height data from the aircraft was transferred onto the field processing computer.

7.3.1 Radar Altimeter Data

The radar altimeter is verified to check that a reasonably constant height above the terrain was flown and that readings during the course of the survey did not exceed the specified tolerances described in section 2.8 and for equipment reliability. The radar altimeter data is used in the production of topographic maps.

7.3.2 GPS Height Data

The aircraft's height above the WGS84 ellipsoid each second was determined by differentially post-processing the synchronised GPS data from the aircraft and the GPS base station. The GPS height of the aircraft is verified to check for data masking and for equipment reliability. The GPS height data is used in the production of topographical maps.

7.3.3 Barometric Altimeter Data

As a backup to the aircraft's GPS height barometric data was also recorded. The barometric height of the aircraft is verified to check for equipment reliability. The barometric data is also used in the processing of the spectrometer data.

7.3.4 Topographical Data

After verification parallax corrections as specified in section 5.1.2.4 were applied and the radar altimeter height was subtracted from the GPS height to give the elevation of the terrain above the WGS84 ellipsoid. It was not considered necessary to make any further corrections as this data is for verification purposes only.

7.3.5 Gridding and Inspection

The topographical data was gridded and grid image enhancements were computed and displayed on screen. These were inspected for inconsistencies and errors and appropriate corrections were made if required.

7.4 Flight Path Data

The flight path data from the aircraft and the GPS base station were transferred onto the field-processing computer. The aircraft's precise location each second was determined by differentially post-processing

the synchronised GPS data from the aircraft and GPS base station. The flight path was recovered and plotted daily to ensure it was within specifications described in section 2.8. Any data not within specification was re-flown. The flight path data was then merged with the rest of the aircraft and diurnal data. Both the aircraft and GPS base station recorded the data in the WGS 1984 datum.

7.5 Magnetic Data

The real-time compensated and uncompensated magnetic data from the aircraft recorded every 0.1 second were transferred onto the field-processing computer. The raw, unedited magnetic data was checked to identify noise and spikes. Single reading spikes were manually edited and if the noise exceeded the specified tolerances described in section 2.8 the part of the line affected was re-flown. After the edited magnetic data was merged with the digital flight path the following sequence of processing operations were carried out to allow inspection and verification of the data:

7.5.1 Diurnal Correction

The synchronised digital diurnal data collected by the base station was first subtracted from the corresponding airborne magnetic readings to calculate a difference. The resultant difference was then subtracted from the base value described in section 4.1.3 to produce diurnally corrected magnetic data.

7.5.2 Parallax Correction

The magnetic data was corrected for system parallax as per section 5.1.2.4.

7.5.3 Preliminary Gridding and Inspection

The magnetic data was gridded and grid image enhancements were computed and displayed on screen. These were inspected for inconsistencies and errors and appropriate corrections were made if required.

7.6 Spectrometer Data

Spectrometer data from the aircraft was transferred onto the field-processing computer. The data is verified to check that readings during the course of the survey did not exceed the specified tolerances described in section 2.8 and for equipment reliability.

7.6.1 Preliminary Corrections

Standard radiometric data reduction corrections were then applied to the Total Count, Potassium, Uranium and Thorium window data.

7.6.2 Preliminary Gridding and Inspection

The spectrometer data was gridded and grid image enhancements were computed and displayed on screen. These were inspected for inconsistencies and errors and appropriate corrections were made if required.

7.7 Quality Control Products

Every 100 engine-hours of survey flying and/or whenever the aircraft departed the survey area, Hundred-Hourly Reports on the data the aircraft acquired during the preceding period was delivered.

Each QC Hundred-Hourly Report comprised the following:

- A map of the eighth difference in the magnetic signal with threshold 0.05 nT.
- A diurnal map showing every one minute period of flying during which the range of the diurnal exceeds 1 nT.
- A flight path map clearly showing separations greater than:
 - 1.05 x nominal flight line separation
 - 1.005 x nominal tie line separation

- A height deviation map highlighting flight segments where the nominal survey height has been exceeded by 10 metres (above or below the nominal height) and must precede any smoothing of the height data.
- A report of the thorium averages flown along the test line is required to show radon, moisture and stability.
- A report of the tests using the hand samples, taken before and after each day's flying, shall be presented to demonstrate the stability of sensitivity.

Grids of the following parameters, were also provided as ERMapper ERS files:

TMI (compensated, tie line levelled, corrected for diurnal and IGRF)

Digital Terrain Model (tie line levelled)

Potassium (fully corrected)

Thorium (fully corrected)

Uranium (fully corrected)

Total Count (fully corrected)

7.8 Digital Archives

All raw aircraft data was backed up at the end of each day's survey. Two copies of all verified and edited data were made at the end of each day's survey. One copy was sent by courier to the Fugro office in Perth with the other copy remaining at the field processing office.

8 FINAL DATA PROCESSING

8.1 Aircraft Location

The aircraft's location each second was determined by differentially post-processing the synchronised GPS data recorded on both the aircraft and GPS base station. Where small gaps occurred in the differential data, positions were interpolated. This data is recorded in the WGS84 datum. Prior to being merged with the magnetic, radiometric and topographic processing stream data, system parallax as specified in section 5.1.2.4 was applied. No datum transformation shift from WGS84 to GDA94 was applied as the difference between the two datums is not considered large enough to have any meaningful effect on the positional accuracy of the survey. For all practical purposes WGS84 and GDA94 positions can be considered identical for this type of survey.

8.2 Magnetic Data Processing

Data collected by each of the raw data sources is checked for spikes and noise by complex procedures. These procedures are summarised below:

- a) Apply any spike corrections (including Inmarsat transmissions) to the raw magnetic variables.
- b) Interpolate undefined magnetic values.
- c) Apply fluxgate corrections and compensate the data with post-processed compensation files.
- d) Filter diurnal values and subtract them from individual compensated magnetic readings. The diurnal base values were then added (see section 4.1.3).
- e) Apply parallax correction (see section 5.1.2.4).
- f) Co-ordinate the data with post-processed GPS data as per section 8.1.
- g) Correct for regional effects of the earth's magnetic field by calculating the IGRF value at each fiducial using following IGRF parameters.

| Area | Model | Secular variation | Elevation (metres) |
|---------|-------|-------------------|--------------------|
| NE | 2000 | 2002.6 | 380 |
| NW | 2000 | 2002.5 | 315 |
| SW | 2000 | 2002.5 | 350 |
| SE | 2000 | 2002.5 | 350 |
| Central | 2000 | 2002.5 | 300 |

- h) Using the tie lines (flown at 90 degrees to the traverse lines) a set of miss-tie values were determined. These miss-tie values reflected the differences in the magnetic value between the tie lines and the traverse lines over the same geographical point. Using a least squares fit algorithm, which also takes into account the statistical variation inherent in DGPS positioning, a series of corrections were applied to the traverse line data. These allowed the data to be levelled to the same base value.
- i) Following this, a Fugro proprietary micro-leveling process was applied in order to more subtly level the data. This process removes sub-gamma pulls evident only under image enhancement algorithms.
- j) Compute along line Total Magnetic Intensity 1st Vertical Derivative (1VD) from the final levelled TMI data.

8.3 Radiometric Data Processing

The radiometric data was processed using the standard IAEA window processing technique as summarised below.

- a) The 256 channel data is energy calibrated, as detailed in section 8.3.1.
- b) Apply NASVD filtering to the 256 channel data.
- c) Window the NASVD filtered 256 channel data using the IAEA standard energy windows.
- d) Co-ordinate the data with post-processed GPS data as per section 8.1.
- e) Apply spike corrections to the radar altimeter, temperature and pressure values.
- f) Apply parallax corrections to altimeter, temperature and pressure data (see section 5.1.2.4).
- g) Calculate the equivalent terrain clearance at STP (standard temperature and pressure).
- h) Remove aircraft background.
- i) Remove cosmic background.
- j) Remove radon background.
- k) Apply stripping ratios.
- l) Apply height corrections.

m) Convert to ground concentrations.

8.3.1 Energy Calibration

The spectral drift was checked by monitoring the position of Potassium, Uranium and Thorium peaks on average spectra along flight lines. The peak positions were determined by removing the Compton continuum and applying a gradient search technique on the residual spectrum. The original 256 channel data was mapped onto the corrected peak positions and a new 256 channel data set was generated by interpolation and summation.

To verify the calibration, spectra was checked by comparing the before and after energy calibration plots. Where any spectra showed errors in recalibration, or any other abnormalities, the lines were reflighted.

8.3.2 NASVD Filtering

The radiometrics were produced with NASVD smoothing. Using the NASVD technique, the raw spectra were first smoothed using 7 principal components. Eigenvectors and statistics on the NASVD processing results were used for analysis. Raw count rates used for final processing were extracted by summing the 256 channel data over the IAEA windows centred on the peak locations, to the nearest channel.

8.3.3 Windowing and Dead-Time Correction

The NASVD smoothed 256 channel data were summed into the standard IAEA windows.

| Window | Peak Energy (keV) | Energy Window (keV) | GR-820 Channel Window |
|-------------|-------------------|---------------------|-----------------------|
| Total Count | - | 410 - 2810 | 34 - 234 |
| Potassium | 1460 | 1370 - 1570 | 115 - 131 |
| Uranium | 1765 | 1660 - 1860 | 139 - 155 |
| Thorium | 2615 | 2410 - 2810 | 201 - 234 |
| Cosmic | - | 4000 - 6000 | - |

Gamma-ray spectrometers require a finite time to process each pulse from the detectors. While one pulse is being processed, any other pulse that arrives will be rejected. Consequently the 'live' time of a spectrometer is reduced by the time taken to process all pulses reaching the multi-channel analyser. The window data is then normalised to counts per second by dividing by the livetime. The cosmic channel does not undergo the normalising process as it is output by the GR-820 in counts per second.

8.3.4 Cosmic Aircraft Background Removal

The cosmic and aircraft backgrounds for each channel are of the form:

| | |
|---------------------------|---|
| $N = a + b \cdot C$ where | |
| N = | combined cosmic & aircraft background in each spectral window |
| a = | aircraft background in the window |
| C = | cosmic channel count |
| b = | cosmic stripping factor |

The aircraft background radiation was removed by subtracting the computed aircraft background from the Total Count, Potassium, Uranium and Thorium windows. The effect of cosmic radiation was removed from each window by multiplying the cosmic channel by the cosmic stripping factor for each window and subtracting the result from the window data.

Aircraft Background and Cosmic Stripping Ratio for VH-BNZ

| Window | Aircraft Background | Cosmic Stripping Ratio |
|-------------|---------------------|------------------------|
| Total Count | 65.0 | 0.8700 |
| Potassium | 18.5 | 0.0490 |
| Uranium | 0.8 | 0.0403 |
| Thorium | 0.5 | 0.0495 |

Aircraft Background and Cosmic Stripping Ratio for VH-KAC

| Window | Aircraft Background | Cosmic Stripping Ratio |
|-------------|---------------------|------------------------|
| Total Count | 22.0 | 0.8900 |
| Potassium | 5.4 | 0.0496 |
| Uranium | 0.1 | 0.0401 |
| Thorium | 0.2 | 0.0440 |

8.3.5 Atmospheric Radon

The 256 channel data were then pre-processed to obtain data for Radon gas background removal. Radon corrections are performed using the spectral ratio technique, involving detailed curve-fitting techniques to determine the final count values for various peaks of filtered spectral data (using long filters). Corrections are made for the interference to the 0.609 MeV and 1.76 MeV peaks from adjacent thorium peaks, in an iterative way, before the final peak values are accepted, then the spectral ratios are established. This method is calibrated using the test range data, before the corrections are applied to the data.

8.3.6 STP Altitude

The radar altimeter data was converted to effective height at standard temperature and pressure using the expression:

$$STPAIt = RAIt * (P/103) * (273 / (T+273))$$

where:

- RAIt = the observed radar altitude in metres
- T = the measured air temperature in degrees C
- P = the barometric pressure in hectopascals

8.3.7 Spectral Stripping

Spectral stripping was applied to the Potassium, Uranium and Thorium windows. The stripping co-efficients were corrected for STP altitude.

Stripping Ratios for VH-BNZ

| Stripping | Value | STP adjustment (/m) |
|-----------|-------|---------------------|
| Alpha | 0.250 | 0.00049 |
| Beta | 0.417 | 0.00065 |
| Gamma | 0.724 | 0.00069 |
| A | 0.067 | 0 |
| B | 0 | 0 |
| G | 0 | 0 |

Stripping Ratios for VH-KAC

| Stripping | Value | STP adjustment (/m) |
|-----------|-------|---------------------|
| Alpha | 0.253 | 0.00049 |
| Beta | 0.391 | 0.00065 |
| Gamma | 0.763 | 0.00069 |
| A | 0.068 | 0 |
| B | 0 | 0 |
| G | 0 | 0 |

8.3.8 Height Correction

The background corrected and stripped window data were then corrected for variations in the density altitude of the detector.

STP Altitude Coefficients for Aircraft VH-BNZ

| Window | Attenuation coefficient (m ⁻¹) |
|-------------|--|
| Total Count | -0.00768 |
| Potassium | -0.00955 |
| Uranium | -0.00756 |
| Thorium | -0.00765 |

STP Altitude Coefficients for Aircraft VH-KAC

| Window | Attenuation coefficient (m ⁻¹) |
|-------------|--|
| Total Count | -0.00758 |
| Potassium | -0.00950 |
| Uranium | -0.00739 |
| Thorium | -0.00735 |

8.3.9 Ground Concentrations

The Total Count window data were then converted to dose rate and the Potassium, Uranium and Thorium windows were converted to ground concentrations using the expression:

$C = N/S$
 where

C = concentration of the radioelement in (nGy/h, % K, ppm U, ppm Th)
 N = count rate for each STP height corrected window
 S = sensitivity factor

Sensitivity factors for VH-BNZ @ 80 metres

| Window | Factor |
|-------------|--------------|
| Total Count | 26.094 nGy/h |
| Potassium | 92.28 % |
| Uranium | 10.98 ppm |
| Thorium | 5.78 ppm |

Sensitivity factors for VH-BNZ @ 60 metres

| Window | Factor |
|-------------|--------------|
| Total Count | 30.280 nGy/h |
| Potassium | 111.70 % |
| Uranium | 12.77 ppm |
| Thorium | 6.73 ppm |

Sensitivity factors for VH-KAC @ 80 metres

| Window | Factor |
|-------------|--------------|
| Total Count | 30.111 nGy/h |
| Potassium | 118.52 % |
| Uranium | 9.19 ppm |
| Thorium | 6.64 ppm |

Sensitivity factors for VH-KAC @ 60 metres

| Window | Factor |
|-------------|--------------|
| Total Count | 35.040 nGy/h |
| Potassium | 143.32 % |
| Uranium | 10.65 ppm |
| Thorium | 7.69 ppm |

8.4 Digital Elevation Model

Data collected by each of the raw data sources is checked for spikes and then processed as follows:

- n) Apply any spike corrections to the raw radar altimeter data.
- o) Interpolate undefined values.
- p) Apply parallax correction (see section 5.1.2.4).
- q) Co-ordinate the data with post-processed GPS data as per section 8.1.
- r) Subtract the aircraft's height above ground from the aircraft's height above the GRS80 ellipsoid and correct for radar altimeter/GPS sensor separation.
- s) Convert to Australian Height Datum 1998 (AHD) by using the AUSLIG geoid model corrections for AHD 1998.
- t) Using the tie lines (flown at 90 degrees to the traverse lines) a set of miss-tie values were determined. These miss-tie values reflected the differences in the computed topographic height between the tie lines and the traverse lines over the same geographical point. Using a least squares fit algorithm, which also takes into account the statistical variation inherent in DGPS positioning, a series of corrections were applied to the traverse line data.
- u) Following this, a Fugro proprietary micro-levelling process was applied in order to more subtly level the data.

8.5 Company areas C1 & C3

As per the contract all data east of 132 deg was not processed and so data and grids have been clipped at 132°.

8.6 Gridding

The final levelled magnetic, radiometric and elevation data were gridded using the minimum curvature method. A grid cell size of 100 meters ie. ¼ line spacing, was used. The NW, SW, Central and company area grids were merged to make a set of "West" grids (MGA52). The NE and SE area grids were merged to make a set of "East" grids (MGA53). The "West" grids were then transformed to MGA53 and a set of "All" grids were made.

For each gridded parameter, e.g. TMI, TC, DEM, etc., a grid was made of each area and then merged to form the grid areas described above. Grids of TMI, TC, K, U and Th are supplied for each of the company areas. RTP and AGC_1VD grids were computed from the merged MGA52/MGA53 TMI and 1VD grids respectively. A list of the grids produced can be found in Appendix 3.

8.7 Merging

Private company magnetic and radiometric data collected at a line spacing of 200 or 250 metres and covering an area that joins the NW and SW new survey areas, was obtained, and the new data was merged with the private company data.

APPENDIX 1.: LINE LISTING

A line number summary has been included on the accompanying CD-ROM.

Directory: buchanan/appendix_docs

Format: MS-WORD 97

File: line_summary.doc

APPENDIX 2.: LINE DATA

Three copies of line data were provided on CD-ROM. The line data format conformed to the ASEG-GDF (II) format. Three sets of line data were provided:

- a) Magnetic and elevation data at 0.1 second intervals.
- b) Windowed radiometric data at 1.0 second intervals.
- c) Raw radiometric 256 channel data at 1.0 second intervals.

Example .DAT, .DES and .DFN files covering the three types of line data have been included on the accompanying CD-ROM.

Directory: buchanan/appendix_docs/digital

Format: ASCII

Files:

| File name | Description |
|------------------------|--|
| README_located.txt | Located data README file |
| Buchanan_NE_mag.dat | Mag and elevation data file |
| Buchanan_NE_mag.des | Mag and elevation description file |
| Buchanan_NE_mag.dfn | Mag and elevation definition file |
| Buchanan_NE_rad.dat | Radiometric window data data file |
| Buchanan_NE_rad.des | Radiometric window data description file |
| Buchanan_NE_rad.dfn | Radiometric window data definition file |
| Buchanan_NE_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_NE_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_NE_rad256.dfn | Raw radiometric 256 channel definition file |
| Buchanan_NW_mag.dat | Mag and elevation data file |
| Buchanan_NW_mag.des | Mag and elevation description file |
| Buchanan_NW_mag.dfn | Mag and elevation definition file |
| Buchanan_NW_rad.dat | Radiometric window data data file |
| Buchanan_NW_rad.des | Radiometric window data description file |
| Buchanan_NW_rad.dfn | Radiometric window data definition file |
| Buchanan_NW_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_NW_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_NW_rad256.dfn | Raw radiometric 256 channel definition file |
| Buchanan_SE_mag.dat | Mag and elevation data file |
| Buchanan_SE_mag.des | Mag and elevation description file |
| Buchanan_SE_mag.dfn | Mag and elevation definition file |
| Buchanan_SE_rad.dat | Radiometric window data data file |
| Buchanan_SE_rad.des | Radiometric window data description file |
| Buchanan_SE_rad.dfn | Radiometric window data definition file |
| Buchanan_SE_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_SE_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_SE_rad256.dfn | Raw radiometric 256 channel definition file |
| Buchanan_SW_mag.dat | Mag and elevation data file |
| Buchanan_SW_mag.des | Mag and elevation description file |
| Buchanan_SW_mag.dfn | Mag and elevation definition file |
| Buchanan_SW_rad.dat | Radiometric window data data file |
| Buchanan_SW_rad.des | Radiometric window data description file |
| Buchanan_SW_rad.dfn | Radiometric window data definition file |
| Buchanan_SW_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_SW_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_SW_rad256.dfn | Raw radiometric 256 channel definition file |

| | |
|------------------------------|--|
| Buchanan_Central_mag.dat | Mag and elevation data file |
| Buchanan_Central_mag.des | Mag and elevation description file |
| Buchanan_Central_mag.dfn | Mag and elevation definition file |
| Buchanan_Central_rad.dat | Radiometric window data data file |
| Buchanan_Central_rad.des | Radiometric window data description file |
| Buchanan_Central_rad.dfn | Radiometric window data definition file |
| Buchanan_Central_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_Central_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_Central_rad256.dfn | Raw radiometric 256 channel definition file |
| Buchanan_company2_mag.dat | Mag and elevation data file |
| Buchanan_company2_mag.des | Mag and elevation description file |
| Buchanan_company2_mag.dfn | Mag and elevation definition file |
| Buchanan_company2_rad.dat | Radiometric window data data file |
| Buchanan_company2_rad.des | Radiometric window data description file |
| Buchanan_company2_rad.dfn | Radiometric window data definition file |
| Buchanan_company3_mag_1.dat | Mag and elevation data file |
| Buchanan_company3_mag_1.des | Mag and elevation description file |
| Buchanan_company3_mag_1.dfn | Mag and elevation definition file |
| Buchanan_company3_mag_2.dat | Mag and elevation data file |
| Buchanan_company3_mag_2.des | Mag and elevation description file |
| Buchanan_company3_mag_2.dfn | Mag and elevation definition file |
| Buchanan_company3_rad_1.dat | Radiometric window data data file |
| Buchanan_company3_rad_1.des | Radiometric window data description file |
| Buchanan_company3_rad_1.dfn | Radiometric window data definition file |
| Buchanan_company3_rad_2.dat | Radiometric window data data file |
| Buchanan_company3_rad_2.des | Radiometric window data description file |
| Buchanan_company3_rad_2.dfn | Radiometric window data definition file |
| Buchanan_company3_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_company3_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_company3_rad256.dfn | Raw radiometric 256 channel definition file |
| Buchanan_company4_mag.dat | Mag and elevation data file |
| Buchanan_company4_mag.des | Mag and elevation description file |
| Buchanan_company4_mag.dfn | Mag and elevation definition file |
| Buchanan_company4_rad.dat | Radiometric window data data file |
| Buchanan_company4_rad.des | Radiometric window data description file |
| Buchanan_company4_rad.dfn | Radiometric window data definition file |
| Buchanan_company5_mag_1.dat | Mag and elevation data file |
| Buchanan_company5_mag_1.des | Mag and elevation description file |
| Buchanan_company5_mag_1.dfn | Mag and elevation definition file |
| Buchanan_company5_mag_2.dat | Mag and elevation data file |
| Buchanan_company5_mag_2.des | Mag and elevation description file |
| Buchanan_company5_mag_2.dfn | Mag and elevation definition file |
| Buchanan_company5_rad_1.dat | Radiometric window data data file |
| Buchanan_company5_rad_1.des | Radiometric window data description file |
| Buchanan_company5_rad_1.dfn | Radiometric window data definition file |
| Buchanan_company5_rad_2.dat | Radiometric window data data file |
| Buchanan_company5_rad_2.des | Radiometric window data description file |
| Buchanan_company5_rad_2.dfn | Radiometric window data definition file |
| Buchanan_company5_rad256.dat | Raw radiometric 256 channel data file |
| Buchanan_company5_rad256.des | Raw radiometric 256 channel description file |
| Buchanan_company5_rad256.dfn | Raw radiometric 256 channel definition file |

APPENDIX 3.: GRIDDED DATA

Three copies of gridded data were provided on CD-ROM. All grids were in ERMapper .ERS format.

Grid names are of the form:

Buchanan_<pp>_<gridded_parameter>_<datum>_<projection> for the final merged grids
 Buchanan_<ss>_<gridded_parameter>_<datum>_<projection> for each of the individual areas

where

datum = gda94
 projection = mga52 or mga53
 pp = East, West or All
 ss = NE, NW, SE, SW, Central or company<2,3,4,5>

gridded parameters are:

TMI = Total magnetic intensity
 1VD = TMI 1st vertical derivative (2D Fourier)
 AGC_1VD = 1VD with automatic gain control applied
 RTP = TMI reduced to the pole
 1VD_RTP = 1VD of RTP (2D Fourier)
 DTM = Digital terrain model
 TC = Total count
 K = Potassium
 U = Uranium
 Th = Thorium
 KThU_RGB = Potassium-Thorium-Uranium (Red-Green-Blue) composite

Grids of TMI, DTM, TC, K, U and Th are supplied for each of the individual NW, NE, SW, SE and Central areas.

Grids of TMI, TC, K, U and Th are supplied for each of the company areas.

For each of the above mentioned gridded parameters, merged grids of the West, East and All areas are supplied.

Example .ERS files covering each grid have been included on the accompanying CD-ROM.

Directory: Buchanan/appendix_docs/digital

Format: ERMapper .ERS

Files:

| File name | Description |
|--|--|
| README_gridded.txt | Gridded data README file |
| Buchanan_All_TMI_gda94_mga53.ers | Total magnetic intensity |
| Buchanan_All_1VD_gda94_mga53.ers | TMI 1st vertical derivative (2D Fourier) |
| Buchanan_All_AGC_1VD_gda94_mga53.ers | 1VD with automatic gain control applied |
| Buchanan_All_RTP_gda94_mga53.ers | TMI reduced to the pole |
| Buchanan_All_1VD_RTP_gda94_mga53.ers | 1VD of RTP (2D Fourier) |
| Buchanan_All_DTM_gda94_mga53.ers | Digital terrain model |
| Buchanan_All_TC_gda94_mga53.ers | Total count |
| Buchanan_All_K_gda94_mga53.ers | Potassium |
| Buchanan_All_U_gda94_mga53.ers | Uranium |
| Buchanan_All_Th_gda94_mga53.ers | Thorium |
| Buchanan_All_KThU_RGB_gda94_mga53.ers | Potassium-Thorium-Uranium (Red-Green-Blue) composite |
| Buchanan_East_TMI_gda94_mga53.ers | Total magnetic intensity |
| Buchanan_East_1VD_gda94_mga53.ers | TMI 1st vertical derivative (2D Fourier) |
| Buchanan_East_AGC_1VD_gda94_mga53.ers | 1VD with automatic gain control applied |
| Buchanan_East_RTP_gda94_mga53.ers | TMI reduced to the pole |
| Buchanan_East_1VD_RTP_gda94_mga53.ers | 1VD of RTP (2D Fourier) |
| Buchanan_East_DTM_gda94_mga53.ers | Digital terrain model |
| Buchanan_East_TC_gda94_mga53.ers | Total count |
| Buchanan_East_K_gda94_mga53.ers | Potassium |
| Buchanan_East_U_gda94_mga53.ers | Uranium |
| Buchanan_East_Th_gda94_mga53.ers | Thorium |
| Buchanan_East_KThU_RGB_gda94_mga53.ers | Potassium-Thorium-Uranium (Red-Green-Blue) composite |
| Buchanan_West_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_West_1VD_gda94_mga52.ers | TMI 1st vertical derivative (2D Fourier) |
| Buchanan_West_AGC_1VD_gda94_mga52.ers | 1VD with automatic gain control applied |
| Buchanan_West_RTP_gda94_mga52.ers | TMI reduced to the pole |
| Buchanan_West_1VD_RTP_gda94_mga52.ers | 1VD of RTP (2D Fourier) |
| Buchanan_West_DTM_gda94_mga52.ers | Digital terrain model |
| Buchanan_West_TC_gda94_mga52.ers | Total count |

| | |
|--|--|
| Buchanan_West_K_gda94_mga52.ers | Potassium |
| Buchanan_West_U_gda94_mga52.ers | Uranium |
| Buchanan_West_Th_gda94_mga52.ers | Thorium |
| Buchanan_West_KThU_RGB_gda94_mga52.ers | Potassium-Thorium-Uranium (Red-Green-Blue) composite |
| Buchanan_NE_DTM_gda94_mga53.ers | Digital terrain model |
| Buchanan_NE_K_gda94_mga53.ers | Potassium |
| Buchanan_NE_TC_gda94_mga53.ers | Total count |
| Buchanan_NE_TMI_gda94_mga53.ers | Total magnetic intensity |
| Buchanan_NE_Th_gda94_mga53.ers | Thorium |
| Buchanan_NE_U_gda94_mga53.ers | Uranium |
| Buchanan_NW_DTM_gda94_mga52.ers | Digital terrain model |
| Buchanan_NW_K_gda94_mga52.ers | Potassium |
| Buchanan_NW_TC_gda94_mga52.ers | Total count |
| Buchanan_NW_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_NW_Th_gda94_mga52.ers | Thorium |
| Buchanan_NW_U_gda94_mga52.ers | Uranium |
| Buchanan_SE_DTM_gda94_mga53.ers | Digital terrain model |
| Buchanan_SE_K_gda94_mga53.ers | Potassium |
| Buchanan_SE_TC_gda94_mga53.ers | Total count |
| Buchanan_SE_TMI_gda94_mga53.ers | Total magnetic intensity |
| Buchanan_SE_Th_gda94_mga53.ers | Thorium |
| Buchanan_SE_U_gda94_mga53.ers | Uranium |
| Buchanan_SW_DTM_gda94_mga52.ers | Digital terrain model |
| Buchanan_SW_K_gda94_mga52.ers | Potassium |
| Buchanan_SW_TC_gda94_mga52.ers | Total count |
| Buchanan_SW_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_SW_Th_gda94_mga52.ers | Thorium |
| Buchanan_SW_U_gda94_mga52.ers | Uranium |
| Buchanan_company2_K_gda94_mga52.ers | Potassium |
| Buchanan_company2_TC_gda94_mga52.ers | Total count |
| Buchanan_company2_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_company2_Th_gda94_mga52.ers | Thorium |
| Buchanan_company2_U_gda94_mga52.ers | Uranium |
| Buchanan_company3_K_gda94_mga52.ers | Potassium |
| Buchanan_company3_TC_gda94_mga52.ers | Total count |
| Buchanan_company3_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_company3_Th_gda94_mga52.ers | Thorium |
| Buchanan_company3_U_gda94_mga52.ers | Uranium |
| Buchanan_company4_K_gda94_mga52.ers | Potassium |
| Buchanan_company4_TC_gda94_mga52.ers | Total count |
| Buchanan_company4_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_company4_Th_gda94_mga52.ers | Thorium |
| Buchanan_company4_U_gda94_mga52.ers | Uranium |
| Buchanan_company5_K_gda94_mga52.ers | Potassium |
| Buchanan_company5_TC_gda94_mga52.ers | Total count |
| Buchanan_company5_TMI_gda94_mga52.ers | Total magnetic intensity |
| Buchanan_company5_Th_gda94_mga52.ers | Thorium |
| Buchanan_company5_U_gda94_mga52.ers | Uranium |

APPENDIX 4.: HEIGHT CROSSOVER DIFFERENCES


A listing of all traverse and tie line crossover height differences has been included on the accompanying CD-ROM.

Directory: buchanan/appendix_docs

Format: MS-WORD 97

File: xover_summary.doc

APPENDIX 5.: FLIGHT PATH PLOT

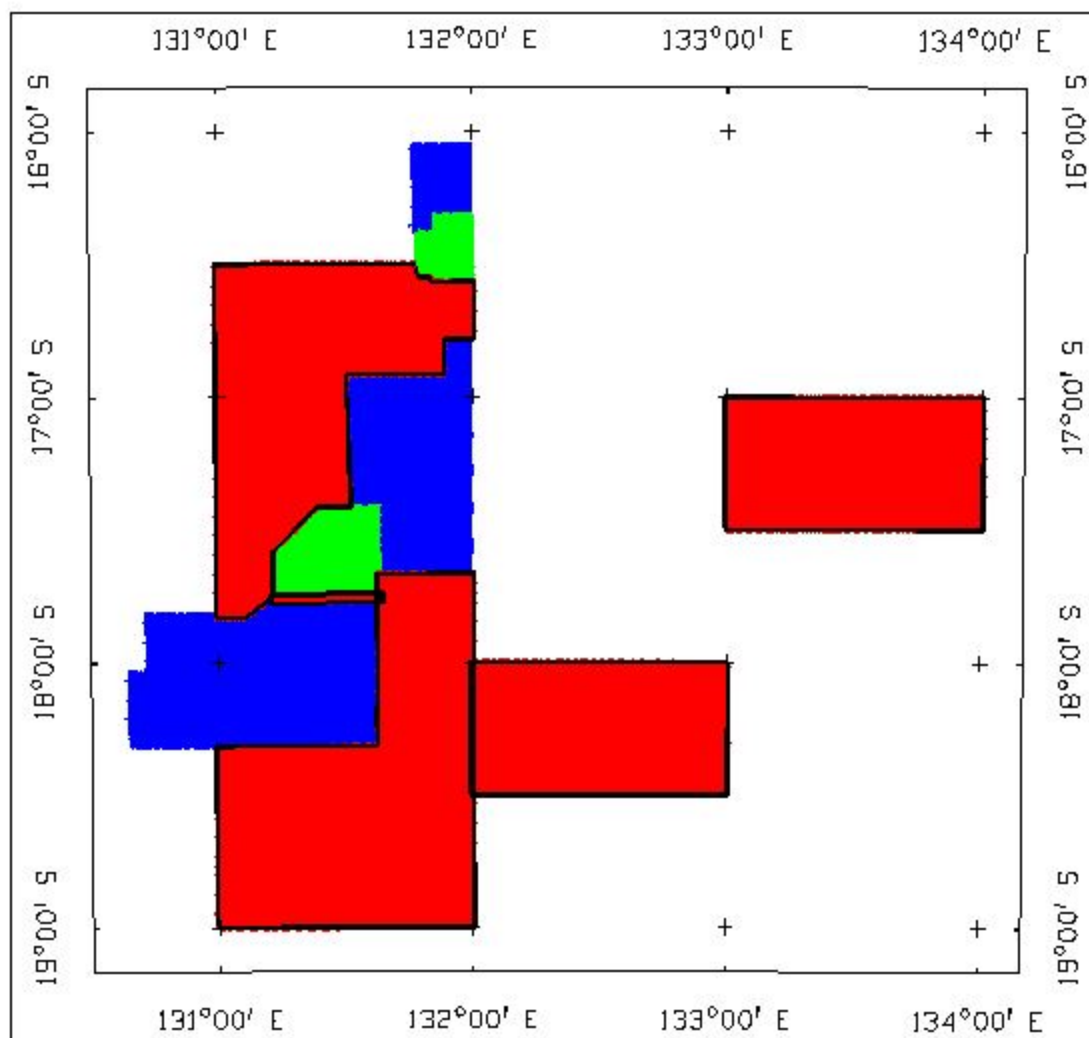

APPENDIX 6.: QUALITY CONTROL PLOTS

Various quality control (QC) products were produced throughout the survey. These products were sent to the client at the time and are not included in this report.

The QC products required were:

1. Cumulative plot of the thorium source test, background removed, Th window.
2. Cumulative plot of the background, Th window.
3. Cumulative plot of the low level test line, height corrected, Th window.
4. Spectral plot of the average spectrum for each flight line.
5. Radar altimeter height deviation map showing all deviations greater .then +/- 10 metres of the nominal terrain clearance.
6. Diurnal map showing every 1 minute period where the diurnal range exceeded 1 nT.
7. Flight path map showing separations greater than:
 1. 1.1 x nominal flight line spacing.
 2. 1.01 x nominal tie line spacing.
8. Aircraft velocity map
9. TMI 4th difference map with a threshold of 0.05 nT

APPENDIX 7.: SPECTROMETER CALIBRATIONS

A report on the spectrometer calibrations has been included on the accompanying CD-ROM.

Directory: buchanan/appendix_docs/rad_parameters

Format: MS-WORD 97

Files:

| File name | Description |
|---------------------------|---|
| kac_cosmic_background.doc | KAC cosmic and aircraft background parameters |
| kac_padcals.doc | KAC stripping co-efficients |
| kac_test_range.doc | KAC height attenuation and sensitivity parameters |
| bnz_cosmic_background.doc | BNZ cosmic and aircraft background parameters |
| bnz_padcals.doc | BNZ stripping co-efficients |
| bnz_test_range.doc | BNZ height attenuation and sensitivity parameters |

APPENDIX 8.: FLYING SUMMARY

A weekly production summary of the flying operations has been included on the accompanying CD-ROM.

Directory: buchanan/appendix_docs

Format: MS-EXCEL 97

Files:

| File name | Description |
|------------------------|----------------------------------|
| kac_flying_summary.xls | VH-KAC weekly operations summary |
| bnz_flying_summary.xls | VH-BNZ weekly operations summary |