

FILTER ANALYSIS

6

3,5

LEANMO  
6 FOLD CDP STACK  
TIME VARYING DECONVOLUTION  
DISPLAY

EXCEPT	WHERE	NOTED
SPREAD LENGTH	2530-110-0-110-2530	
SHOT POINT	9 HOLE DIAMOND	100'x100'
PATTERN	75' OFFSET	
SEISMOMETER	36 SEIS, IN-LINE	
LAYOUT	INTERVAL 15'	
DEPTH CHARGE	17'	
AMOUNT CHARGE	10 OR 5 POUNDS PER HOLE	
TYPE CHARGE	GEOPHEX	

WESTRALIAN OIL LIMITED  
**KEEP RIVER LINES 3,5**

Feb 8

PROJECT KEEP RIVER SEISMIC

SHOT BY GSI PARTY 826  
PROCESSED BY PARTY 826

DEC 1968

COVERAGE 100%  
**FILTER ANALYSIS**



EXCEPT	WHERE	NOTED
DATUM	SEA LEVEL	SEA LEVEL
N.M.O.	NIL	APPLIED
AMPLIFIER	10000	TIAC - 870
G.A.G.C.	80 db/sec	OFF
FILTER	14-92Hz	
MIX	STRAIGHT	STRAIGHT
STATICS	NIL	APPLIED

LEANMO  
6 FOLD CDP STACK  
TIME VARYING DECONVOLUTION  
DISPLAY

FILTER ANALYSIS

6

3,5

FILTER

10-20 Hz


20-40 Hz

30-60 Hz

40-80 Hz









FILTER

FLOW DIAGRAM

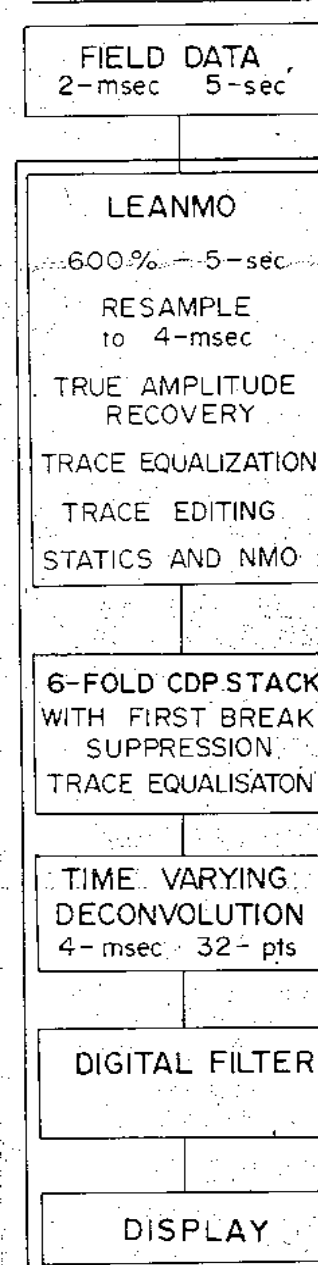

DEPTH TIME


0' 0  
-1000' 2  
-2000' 4  
-3000' 6  
-4000' 8  
-5000' 1.0  
-6000' 1.2  
-7000' 1.4  
-8000' 1.6  
-9000' 1.8  
-10000' 2.0  
2.2  
2.4  
2.6  
2.8  
3.0  
3.2  
3.4  
3.6  
3.8  
4.0  
4.2  
4.4  
4.6  
4.8  
5.0

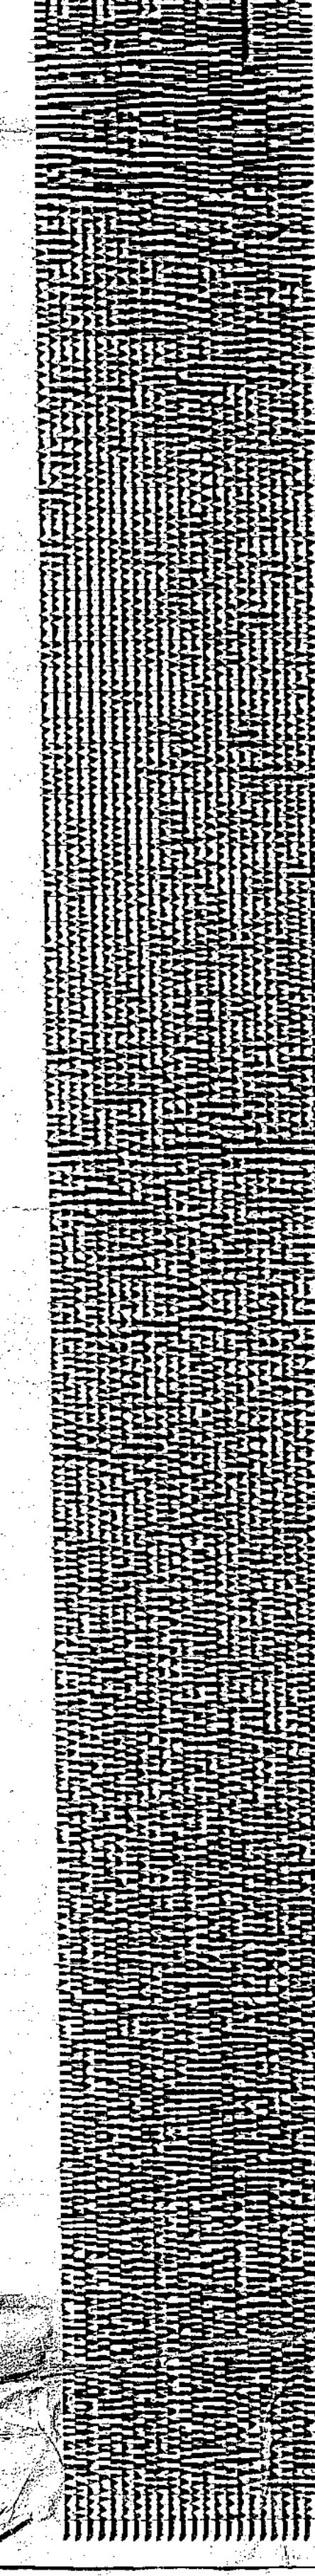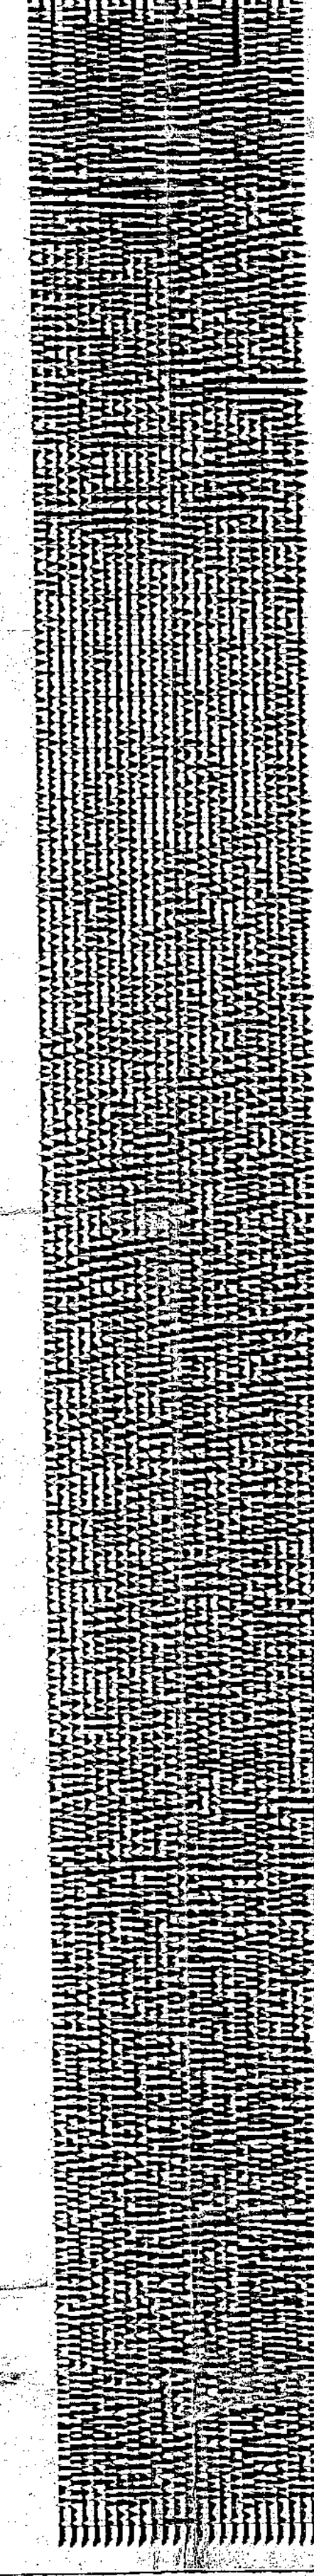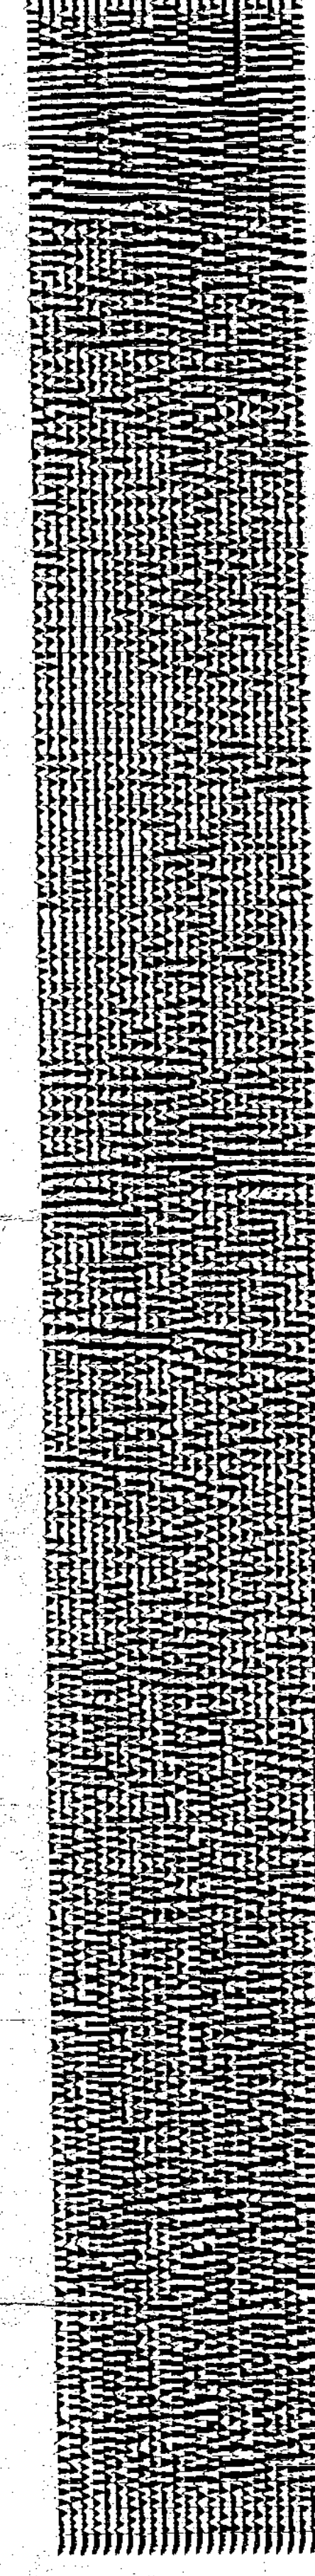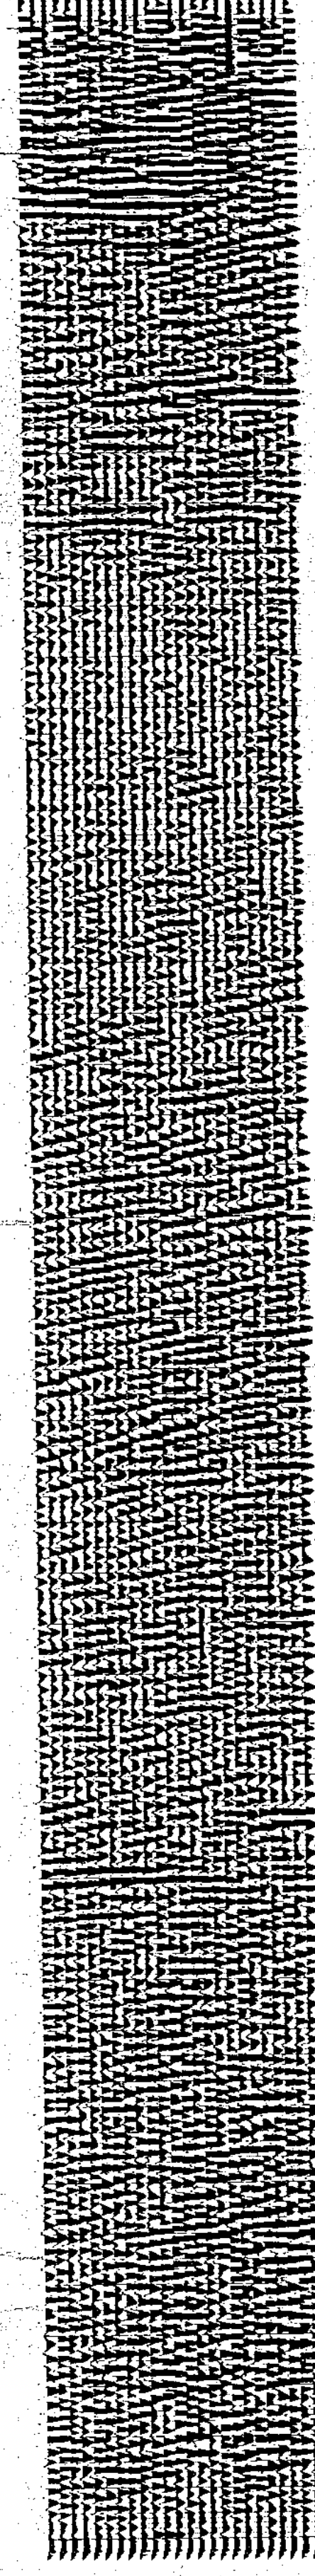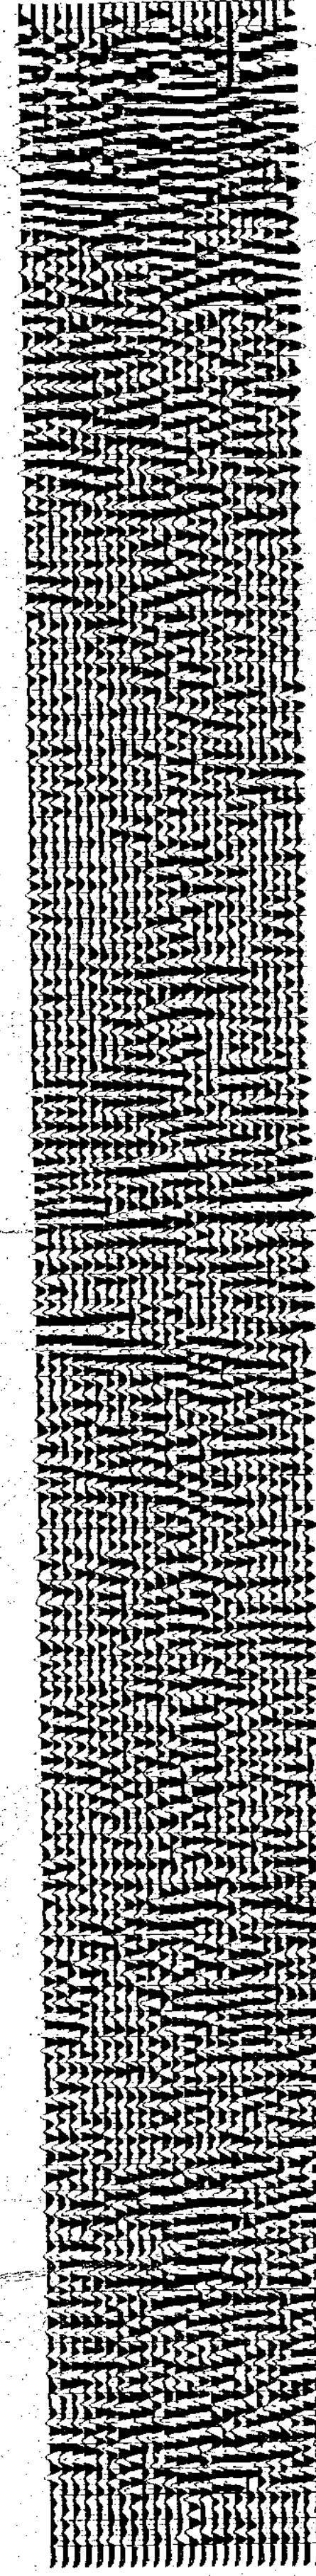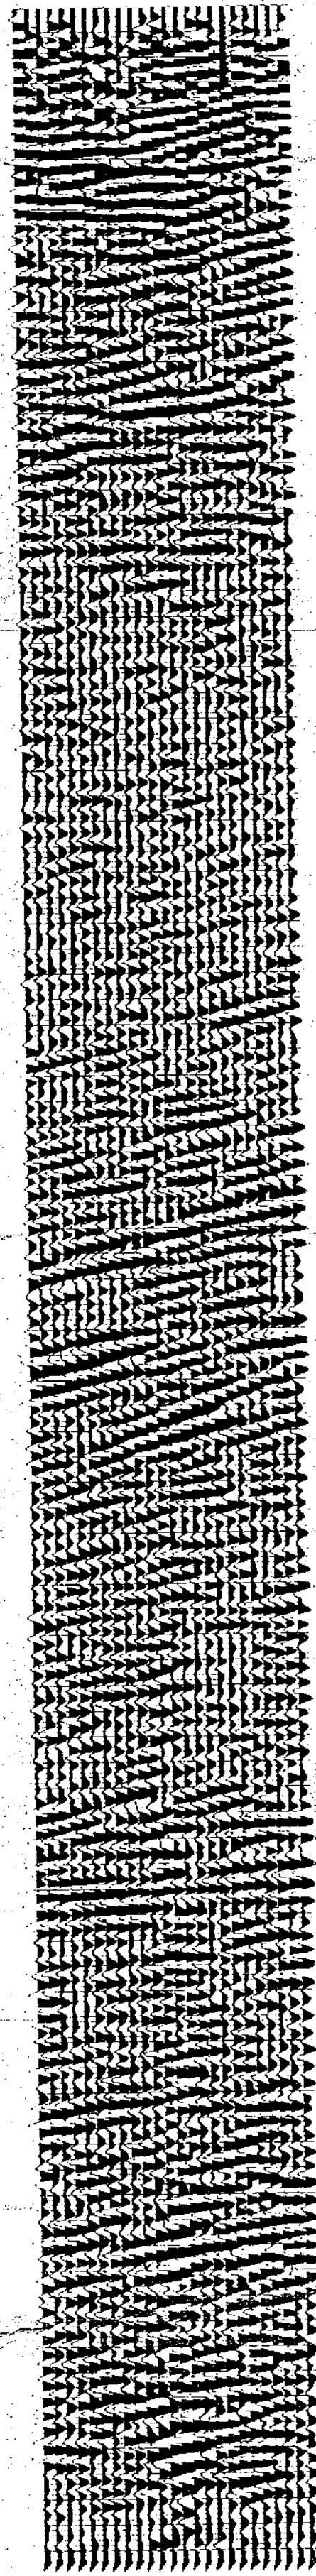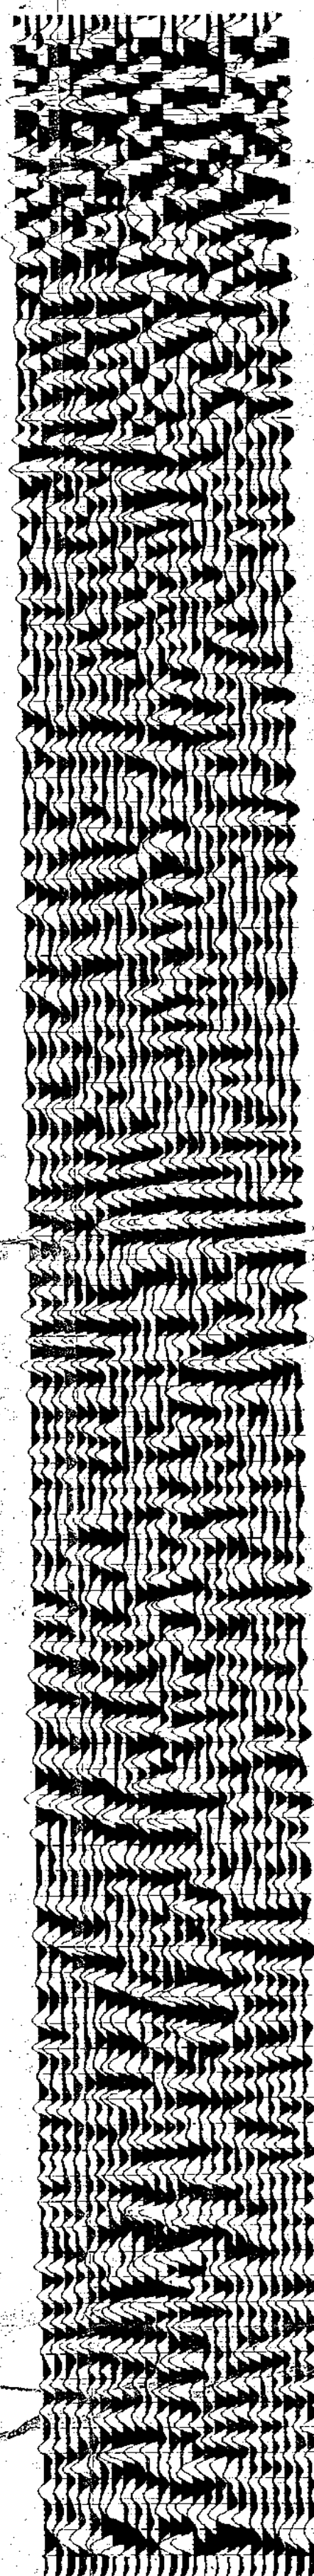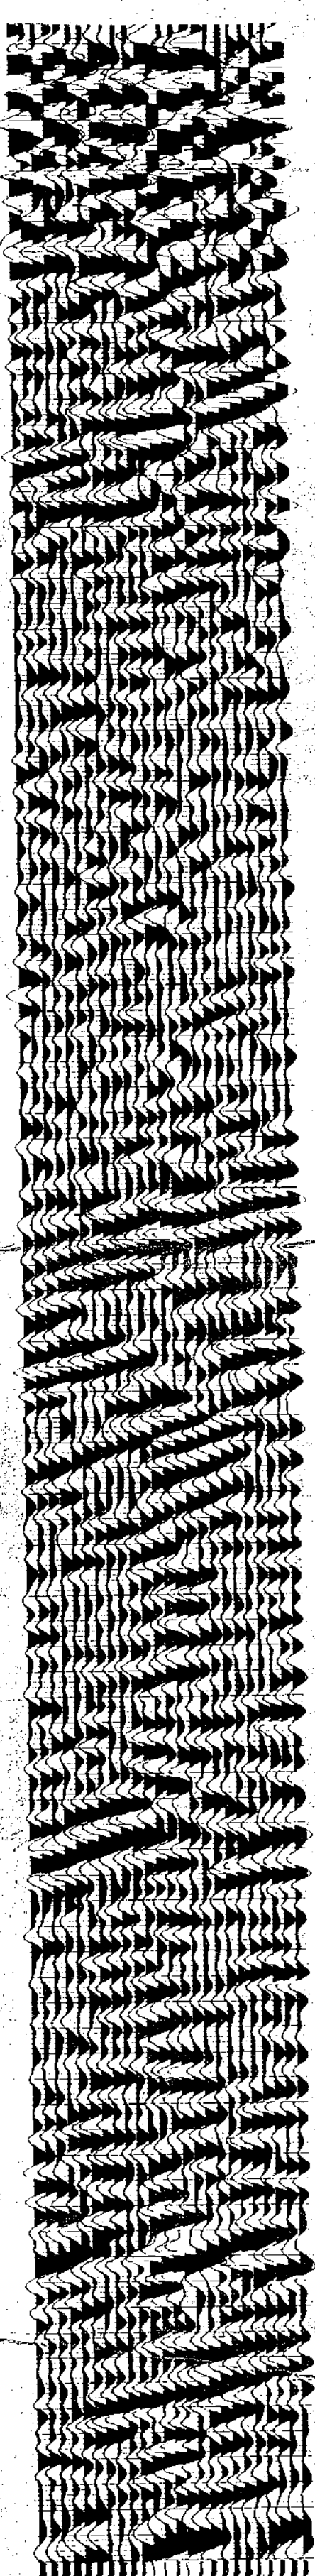

TIME DEPTH

0' 0  
2- -1000'  
4 -2000'  
6 -3000'  
8 -4000'  
1.0 -5000'  
1.2 -6000'  
1.4 -7000'  
1.6 -8000'  
1.8 -9000'  
2.0 -10000'  
2.2  
2.4  
2.6  
2.8  
3.0  
3.2  
3.4  
3.6  
3.8  
4.0  
4.2  
4.4  
4.6  
4.8  
5.0

FLOW DIAGRAM

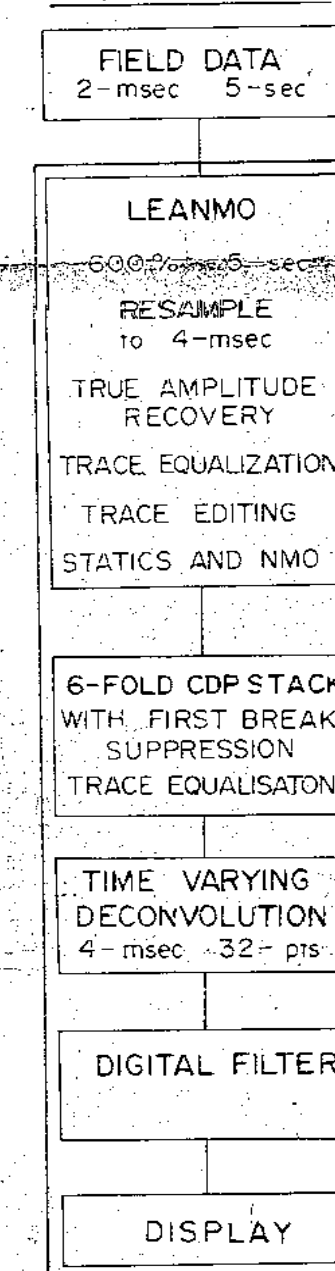

KEEP RIVER LINES 3, 5  
FILTER ANALYSIS

KEEP RIVER LINES 3, 5  
FILTER ANALYSIS