


11  
6

11  
6

EXCEPT	WHERE	NOTED
SPREAD LENGTH	2530-110-0-110-2530	
SHOT POINT	9 HOLE DIAMOND	100'x100'
PATTERN	75' OFFSET	
SEISMO METER	36 SEIS. IN LINE	
LAYOUT	INTERVAL 13'	
DEPTH CHARGE	17'	
AMOUNT CHARGE	10 OR 5 POUNDS PER HOLE	
TYPE CHARGE	GEOPHEX	

WESTRALIAN OIL LIMITED  
**KEEP RIVER LINE 6**  
 PROJECT KEEP RIVER SEISMIC  
 SHOT BY GSI PARTY 826  
 PROCESSED BY PARTY 826  
 DEC 1968  
 GEOPHYSICAL SERVICE INTERNATIONAL  
 COVERAGE 600%

EXCEPT	WHERE	NOTED
DATUM	SEA LEVEL	SEA LEVEL
N.M.O.	NIL	APPLIED
AMPLIFIER	10000	TIAC - 870
G.A.S.C.	80 db/sec	OFF
FILTER	14-92Hz	15-45Hz
MIX	STRAIGHT	STRAIGHT
STATICS	NIL	APPLIED

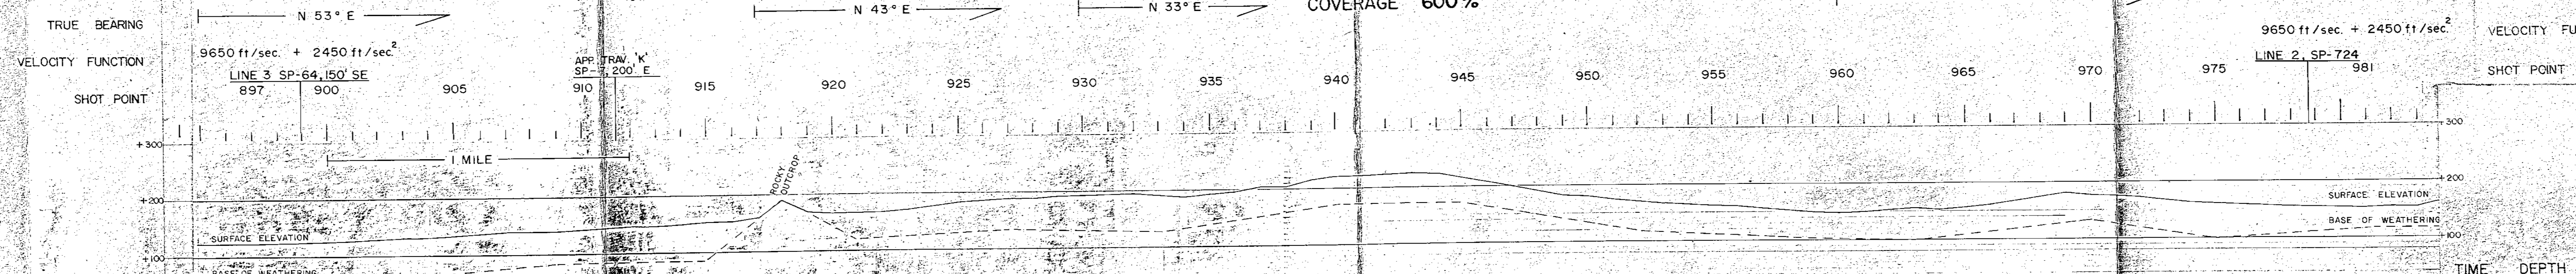

**FLOW DIAGRAM**

FIELD DATA  
2-msec 5-sec

LEANMO  
600% 5-msec  
RESAMPLE  
to 4-msec  
TRUE AMPLITUDE  
RECOVERY  
TRACE EQUALIZATION  
TRACE EDITING  
STATICS AND NMO

6-FOLD CDP STACK  
WITH FIRST BREAK  
SUPPRESSION  
TRACE EQUALISATION

TIME VARYING  
DECONVOLUTION  
4-msec 32-pt

DIGITAL FILTER  
15-45Hz

DISPLAY

**FLOW DIAGRAM**

FIELD DATA  
2-msec 5-sec

LEANMO  
600% 5-msec  
RESAMPLE  
to 4-msec  
TRUE AMPLITUDE  
RECOVERY  
TRACE EQUALIZATION  
TRACE EDITING  
STATICS AND NMO

6-FOLD CDP STACK  
WITH FIRST BREAK  
SUPPRESSION  
TRACE EQUALISATION

TIME VARYING  
DECONVOLUTION  
4-msec 32-pt

DIGITAL FILTER  
15-45Hz

DISPLAY

KEEP RIVER LINE 6 SP 897 - 981

KEEP RIVER LINE 6 SP 897 - 981

