

BAIGENT GEOSCIENCES



Alistair Mackie Geophysical Survey Processing Report

May 2012

Project: Blues Folly & Paradise Well

Table of Contents

1.	Datum Specification	3
2.	Parallax.....	4
3.	Magnetic processing	5
3.1	Processing Flow.....	5
3.2	Compensation.....	5
3.3	Diurnal Base Value	5
3.4	Magnetic Model.....	5
3.5	Tie Line levelling Method	6
3.6	Micro-levelling Method	6
3.7	Interpolation Method	6
4.	Radiometric Processing.....	8
4.1	Processing Flow.....	8
4.2	Window Energy Limits.....	8
4.3	Spectral Stripping Ratios.....	9
4.4	Tie Line Levelling	9
4.5	Micro-levelling Method	9
4.6	Interpolation Method	9
5.	Elevation Processing	11
5.1	Processing Flow.....	11
5.2	Tie Line levelling Method	11
5.3	Micro-levelling Method	11
5.4	Adjust to AHD	12
5.5	Interpolation Method	12
6.	Deliverable Items	13
6.1	Final Magnetic Located Data file	14
6.2	Final Radiometric Located Data file.....	16
6.3	Final 256 Radiometric Data.....	18
7.	Magnetic Data Processing Flow Chart.....	21
8.	Elevation Data Processing Flow Chart	22
9.	Radiometric Processing Flow Chart	23

1. Datum Specification

The output survey coordinates are based on the Geocentric Datum of Australia 1994 (GDA94), zone 53.

It has the following parameters:

Projection name:	Map Grid of Australia
Datum:	Geocentric Datum of Australia (GDA94)
Reference Frame:	ITRF92 (International Terrestrial Reference 1992)
Epoch:	1994.0
Ellipsoid:	GRS80
Semi-major axis:	6.378.137.0 metres
Inverse flattening:	298,257222101
False Northing:	10,000,000 m N
False Easting:	500,000 m E
Scale Factor:	0.9996

2. Parallax

Parallax corrections were applied as follows:

1. variable fiducials for magnetics data.
2. 0.5 fiducials for radiometric data.
3. variable fiducials for dtm

3. Magnetic processing

3.1 Processing Flow

The diurnal base station data was checked for spikes and steps, and suitably filtered prior to the removal of diurnal variations from the aircraft magnetic data.

The diurnal data was filtered with a second difference filter to identify and remove spikes of less than 0.05nT. A second smoothing filter, a 13 point moving average filter is used to reduce noise levels.

The filtered diurnal are then applied to the survey data by synchronising the diurnal data time with the aircraft survey time. The average diurnal base station value was added to the survey data.

An eighth difference filter was run on the raw magnetic survey data in order to identify any remaining spikes in the data, which were manually edited from the data.

The X and Y positioning of the data was then checked for spikes before applying the IGRF correction. Any spikes in the positions were manually edited.

The IGRF 2010 (updated to 2012.34) correction was calculated at each data point taking into account the height above sea level using a constant altitude. This regional magnetic gradient was subtracted from the survey data points.

The data was then tie-line levelled and micro-levelled.

3.2 Compensation

The data was delivered already compensated and filtered.

3.3 Diurnal Base Value

The average diurnal base value was 52,961.21 nT

3.4 Magnetic Model

IGRF was removed using a constant height 0. kms above sea level.

The magnetic model for the centre of each area is detailed below:

Model	IGRF 2010 updated to 2012.34
Declination	5.1057 degrees
Inclination	-54.9866 degrees
Field strength	52908.55 nT
Grid zone	53
Grid central meridian	135.00000 degrees
Input latitude	-23.40624 degrees
Input longitude	134.91659 degrees
Grid convergence	-0.03313 degrees
Grid magnetic angle	5.07257 degrees
Secular variation	-0.03823 degrees

3.5 Tie Line levelling Method

Tie line levelling was applied to the data by least squares minimisation, using a polynomial fit of order 0, of the differences in elevation values at the crossover points of the survey traverse and tie line data.

The least squares tie line levelling process employs a two pass Gauss-Seidel iterative scheme. The essential steps in this process are:

In the first pass the tie lines were first adjusted to minimise, in the least squares sense, the crossover values with the traverse line values being held constant.

The second pass held the levelled tied line values constant, and minimised in the least squares sense, the crossover values with traverses.

The DC correction values are then applied to the traverse line and tie line data.

To reduce the effects of radar altimeter and gps errors on the recorded elevation data at the crossover points, data having a radar altimeter difference greater than 100 metres in a radius of 100 metres on the traverse or tie lines were excluded from the tying process.

3.6 Micro-levelling Method

Micro-levelling techniques were then selectively applied to the tie line levelled data to remove minor residual variations in profile intensity. Selective micro-levelling was applied in order to leave unaffected any data having no residual levelling artefacts. Selective micro-levelling proceeds using the following steps:

Areas of interest that required micro-levelling were identified through the use of image processing visualisation.

Polygons were used to define areas requiring micro-levelling.

“Pseudo-ties” were constructed from the gridded data by extracting traverses from the grid normal to the flight direction.

Line dependent artefacts were removed from the pseudo lines using custom filters.

Crossover values were calculated between traverse lines and pseudo tie lines.

The traverse lines were adjusted in the pre-defined sections to minimise the crossover values.

This process was repeated in order to remove various wavelength line dependent artefacts from the pseudo-ties. The object of each micro-levelling iteration was to produce a smooth control surface to which the traverse lines are levelled. This control surface was provided through the use of “pseudo-ties”.

3.7 Interpolation Method

The interpolation used is a minimum curvature algorithm. The algorithm is based on the work published by Briggs 1974, Briggs I. C.: Machine contouring using minimum curvature. *Geophysics*. Vol. 39, No. 1. February 1974. pp. 39-48.

The algorithm has been modified to include a tension parameter based on the work published by Smith and Wessel Smith, W. H. F, and P. Wessel, 1990, Gridding with continuous curvature splines in tension, *Geophysics* 55, 293-305.

A tension factor of 0 was used to interpolate the magnetics
The mesh size for data interpolation was 20 x 20 metres.

4. Radiometric Processing

4.1 Processing Flow

The processing steps radiometric data were as follows:

1. Application of necessary parallax corrections to data
2. Check radar altimeter data for spikes
3. NASVD spectral smoothing
 - Examine the output to determine the number of components required.
 - Select 8 components for spectral reconstruction.
4. Standard 256 channel radiometric corrections:
 - Dead-time correction performed on 256 channel data.
 - Check if energy recalibration required
 - Remove background radon from window data using Minty's method (1996)
 - Perform STP height corrected spectral stripping
 - Perform STP height correction of window data to average survey height (30 m).
5. Micro-levelling

Spectral smoothing was applied using the NASVD process, and spectral reconstruction was employed using 8 spectral components.

Micro-levelling was applied in the method as described below.

4.2 Window Energy Limits

The energy bounds for the windows were

Window Name	Energy Range (Mev)
Potassium	1.374 – 1.566
Thorium	2.416 – 2.799
Uranium	1.662 – 1.854
Total Count	0.414 – 2.799

4.3 Spectral Stripping Ratios

The stripping ratios used in the processing were:

Alpha	0.277
Beta	0.408
Gamma	0.776
a	0.045
b	0.001
g	0.000

4.4 Tie Line Levelling

No tie line levelling was applied.

4.5 Micro-levelling Method

Micro-levelling techniques were then selectively applied to the tie line levelled data to remove minor residual variations in profile intensity. Selective micro-levelling was applied in order to leave unaffected any data having no residual levelling artefacts. Selective micro-levelling proceeds using the following steps:

Areas of interest that required micro-levelling were identified through the use of image processing visualisation.

Polygons were used to define areas requiring micro-levelling.

“Pseudo-ties” were constructed from the gridded data by extracting traverses from the grid normal to the flight direction.

Line dependent artefacts were removed from the pseudo lines using custom filters.

Crossover values were calculated between traverse lines and pseudo tie lines.

The traverse lines were adjusted in the pre-defined sections to minimise the crossover values.

This process was repeated in order to remove various wavelength line dependent artefacts from the pseudo-ties. The object of each micro-levelling iteration was to produce a smooth control surface to which the traverse lines are levelled. This control surface was provided through the use of “pseudo-ties”.

4.6 Interpolation Method

The interpolation used is a minimum curvature algorithm. The algorithm is based on the worked published by Briggs 1974, Briggs I. C.: Machine contouring using minimum curvature. *Geophysics*. Vol. 39, No. 1. February 1974. pp. 39-48.

The algorithm has been modified to include a tension parameter based on the work published by Smith and Wessel Smith, W. H. F, and P. Wessel, 1990, Gridding with continuous curvature splines in tension, Geophysics 55, 293-305.

A tension factor of 0 was used to interpolate the radiometrics.

The mesh size for data interpolation was 20 x 20 metres.

5. Elevation Processing

5.1 Processing Flow

The processing steps for digital elevation data were as follows:

1. Application of necessary parallax corrections to data
2. Calculation of raw digital elevation data by subtracting the radar altimeter from the gps altitude
3. Tie line levelling
4. Micro-levelling

5.2 Tie Line levelling Method

Tie line levelling was applied to the data by least squares minimisation, using a polynomial fit of order 0, of the differences in elevation values at the crossover points of the survey traverse and tie line data.

The least squares tie line levelling process employs a two pass Gauss-Seidel iterative scheme. The essential steps in this process are:

In the first pass the tie lines were first adjusted to minimise, in the least squares sense, the crossover values with the traverse line values being held constant.

The second pass held the levelled tied line values constant, and minimised in the least squares sense, the crossover values with traverses.

The DC correction values to be applied to the traverse lines and tie lines were then applied to the magnetic data.

To reduce the effects of radar altimeter and gps errors on the recorded elevation data at the crossover points, data having a radar altimeter difference greater than 10 metres in a radius of 100 metres on the traverse or tie lines were excluded from the tying process.

5.3 Micro-levelling Method

Micro-levelling techniques were then selectively applied to the tie line levelled data to remove minor residual variations in profile intensity. Selective micro-levelling was applied in order to leave unaffected any data having no residual levelling artefacts. Selective micro-levelling proceeds using the following steps:

Areas of interest that required micro-levelling were identified through the use of image processing visualisation.

Polygons were used to define areas requiring micro-levelling.

“Pseudo-ties” were constructed from the gridded data by extracting traverses from the grid normal to the flight direction.

Line dependent artefacts were removed from the pseudo lines using custom filters.

Crossover values were calculated between traverse lines and pseudo tie lines.

The traverse lines were adjusted in the pre-defined sections to minimise the crossover values.

This process was repeated in order to remove various wavelength line dependent artefacts from the pseudo-ties. The object of each micro-levelling iteration was to produce a smooth control surface to which the traverse lines are levelled. This control surface was provided through the use of “pseudo-ties”.

5.4 Adjust to AHD

N values were removed in real time in the GPS receiver.

5.5 Interpolation Method

The interpolation used is a minimum curvature algorithm. The algorithm is based on the work published by Briggs 1974, Briggs I. C.: Machine contouring using minimum curvature. *Geophysics*. Vol. 39, No. 1. February 1974. pp. 39-48.

The algorithm has been modified to include a tension parameter based on the work published by Smith and Wessel Smith, W. H. F, and P. Wessel, 1990, Gridding with continuous curvature splines in tension, *Geophysics* 55, 293-305.

A tension factor of 0 was used to interpolate the dtm.

The mesh size for data interpolation was 20 x 20 metres.

6. Deliverable Items

The deliverable items included all digital data. The located data conformed to ASEG-GDF format and the gridded data was supplied in ERMapper format. The description of the located data is below:

There was two area's supplied:

Blues Folly
Paradise Well

Located data supplied in ASEG GDF

File name	Definition
*_magdtm	Raw magnetics & elevation data
*_rad256	Raw 256 channel data
*_rads	Final Radiometric Window Data

Gridded data supplied in ER Mapper format

File name	Definition	Units
*_TMI	Final magnetic gridded data	nT
*_ELEV	Final elevation gridded data	m
*_TOT	Final radiometric dose rate gridded data	CPS
*_POT	Final radiometric potassium gridded data	CPS
*_TH	Final radiometric uranium gridded data	CPS
*_URA	Final radiometric thorium gridded data	CPS

* Denotes the area name as described above

6.1 Final Magnetic Located Data file

```
COMM
COMM Baigent Geosciences Pty. Ltd.
COMM -----
COMM
COMM LOCATED DATA
COMM -----
COMM Area : Blues Folly & Paradise Well
COMM Company Flown by: Daishsat Pty. Ltd.
COMM Company Flown for: Alistair Mackie
COMM Company Processed: Baigent Geosciences Pty. Ltd.
COMM
COMM AIRBORNE SURVEY EQUIPMENT:
COMM -----
COMM
COMM Aircraft : Robinson R44
COMM Magnetometer : Geometrics G822 Caesium Vapour
COMM Magnetometer Resolution : 0.001 nT
COMM Magnetometer Compensation : Post Flight
COMM Magnetometer Sample Interval : 20 Hz, Approx 2.1 metres
COMM Data Acquisition : GeoOZ Model 2009
COMM Spectrometer : Radiation Solutions RS 500
COMM Crystal Size : 16 lt downward array
COMM Spectrometer Sample Interval : 1.0 Seconds (approx 42 metres)
COMM GPS Navigation System : Novatel 951R GPS Receiver
COMM
COMM
COMM AIRBORNE SURVEY SPECIFICATIONS
COMM
COMM Blues Folly
COMM Flight Line Direction : 045 - 225 degrees
COMM Flight Line Separation : 100 metres
COMM Tie Line Direction : 135 - 315 degrees
COMM Tie Line Separation : 1000 metres
COMM
COMM Paradise Well
COMM Flight Line Direction : 135 - 315 degrees
COMM Flight Line Separation : 100 metres
COMM Tie Line Direction : 045 - 225 degrees
COMM Tie Line Separation : 1000 metres
COMM Terrain Clearance : 30 metres (MTC)
COMM
COMM
COMM Survey flown : May 2012
COMM COMM
COMM
COMM Flight path calculated from GPS Data using a Novatel 951R GPS Receiver.
COMM
COMM
COMM Grid notation refers to GDA/MGA Zone 53
COMM
COMM
COMM MAGNETIC DATA CORRECTIONS:
COMM -----
```

COMM Diurnal variations removed
 COMM IGRF(2010) updated to 2012.23 removed
 COMM Average survey base station value added to datum
 COMM
 COMM RADIOMETRIC CORRECTIONS AND COEFFICIENTS:
 COMM -----
 COMM Data has been corrected for aircraft and cosmic backgrounds.
 COMM Height corrected to a constant datum of 30 metres,
 COMM minimum height of 5 and a maximum of 300 metres.
 COMM Data has also been corrected for radon using the method described by Minty
 COMM and corrected for channel interaction.

	Tot.Count	Potassium	Uranium	Thorium
COMM Arcft Bkg	26.6	10.37	0	0
COMM Cosmic Bkg	0.986	0.0514	0.041	0.0549
COMM Height Attn	0.007434	0.009432	0.008428	0.007510

COMM STRIPPING RATIOS:

COMM -----
 COMM Alpha = 0.269, Beta = 0.404, Gamma = 0.758,
 COMM a = 0.056, b = 0.004, g = -0.001

	Channel name	Format	Units	Null Value
COMM	Job code	A5		
COMM	Line number	A9		
COMM	Flight	I5		
COMM	Flight date	A9	YYYYMMDD	
COMM	fiducial	f12.1		-999999.000000
COMM	mga_east	f11.2	METRES	-99999.000000
COMM	mga_north	f11.2	METRES	-99999.000000
COMM	gda_long	f12.6	degrees	-999.000000
COMM	gda_lat	f11.6	degrees	-99.000000
COMM	rad_alt	f8.2	METRES	-999.000000
COMM	gps_height	f8.2	METRES	-999.000000
COMM	raw_mag	f10.3	nT	-9999.000000
COMM	mag_gammas	f10.3	nT	-9999.000000
COMM	diurnal_gammas	f10.3	nT	-9999.000000
COMM	igrf_gammas	f10.3	nT	-9999.000000
COMM	fin_mag	f10.3	nT	-9999.000000
COMM	dtm	f8.2	METRES	-99.000000

DEFN ST=RECD,RT=COMM;RT:A4;COMMENTS:A80
 DEFN 1 ST=RECD,RT=;BGSJOB:I5:NULL=999:NAME=BGS Job Code
 DEFN 2 ST=RECD,RT=;LINE:A9:NULL=999999:NAME=line
 DEFN 3 ST=RECD,RT=;FLIGHT:F5.0:NULL=999:NAME=flight
 DEFN 4 ST=RECD,RT=;DATE:A9:NULL=999999:UNIT=YYYYMMDD
 DEFN 5 ST=RECD,RT=;FIDUCIAL:f12.1:NULL=-999999.000000:NAME=FIDUCIAL
 DEFN 6 ST=RECD,RT=;MGAEAST:f11.2:UNIT=METRES:NULL=-99999.000000:NAME=MGA_EAST
 DEFN 7 ST=RECD,RT=;MGANORTH:f11.2:UNIT=METRES:NULL=-99999.000000:NAME=MG_A_NORTH
 DEFN 8 ST=RECD,RT=;GDA94LNG:f12.6:UNIT=degrees:NULL=-999.000000:NAME=GDA94LNG
 DEFN 9 ST=RECD,RT=;GDA94LAT:f11.6:UNIT=degrees:NULL=-99.000000:NAME=GDA94LAT
 DEFN 10 ST=RECD,RT=;RAD_ALT:f8.2:UNIT=METRES:NULL=-999.000000:NAME=RAD_ALT
 DEFN 11 ST=RECD,RT=;GPS_HT:f8.2:UNIT=METRES:NULL=-999.000000:NAME=GPS_ALT
 DEFN 12 ST=RECD,RT=;MAGUNCMP:f10.3:UNIT=nT:NULL=-9999.000000:NAME=MAGUNCMP
 DEFN 13 ST=RECD,RT=;MAGCOMP:f10.3:UNIT=nT:NULL=-9999.000000:NAME=MAGCOMP
 DEFN 14 ST=RECD,RT=;DIURNAL:f10.3:UNIT=nT:NULL=-9999.000000:NAME=DIURNAL

```

DEFN 15 ST=RECD,RT=;IGRF:f10.3:UNIT=nT:NULL=-9999.000000:NAME=IGRF
DEFN 16 ST=RECD,RT=;FINMAG:f10.3:UNIT=nT:NULL=-9999.000000:NAME=FINMAG
DEFN 17 ST=RECD,RT=;DEM:f8.2:UNIT=METRES:NULL=-99.000000:NAME=DTM
;END DEFN

```

6.2 Final Radiometric Located Data file

```

COMM
COMM Baigent Geosciences Pty. Ltd.
COMM -----
COMM
COMM LOCATED DATA
COMM -----
COMM Area : Blues Folly & Paradise Well
COMM Company Flown by: Daishsat Pty. Ltd.
COMM Company Flown for: Alistair Mackie
COMM Company Processed: Baigent Geosciences Pty. Ltd.
COMM
COMM AIRBORNE SURVEY EQUIPMENT:
COMM -----
COMM
COMM Aircraft : Robinson R44
COMM Magnetometer : Geometrics G822 Caesium Vapour
COMM Magnetometer Resolution : 0.001 nT
COMM Magnetometer Compensation : Post Flight
COMM Magnetometer Sample Interval : 20 Hz, Approx 2.1 metres
COMM Data Acquisition : GeoOZ Model 2009
COMM Spectrometer : Radiation Solutions RS 500
COMM Crystal Size : 16 lt downward array
COMM Spectrometer Sample Interval : 1.0 Seconds (approx 42 metres)
COMM GPS Navigation System : Novatel 951R GPS Receiver
COMM
COMM
COMM AIRBORNE SURVEY SPECIFICATIONS
COMM
COMM Blues Folly
COMM Flight Line Direction : 045 - 225 degrees
COMM Flight Line Separation : 100 metres
COMM Tie Line Direction : 135 - 315 degrees
COMM Tie Line Separation : 1000 metres
COMM
COMM Paradise Well
COMM Flight Line Direction : 135 - 315 degrees
COMM Flight Line Separation : 100 metres
COMM Tie Line Direction : 045 - 225 degrees
COMM Tie Line Separation : 1000 metres
COMM Terrain Clearance : 30 metres (MTC)
COMM
COMM
COMM Survey flown : May 2012
COMM
COMM
COMM Flight path calculated from GPS Data using a Novatel 951R GPS Receiver.

```



```

COMM
COMM
COMM Grid notation refers to GDA/MGA Zone 53
COMM
COMM
COMM MAGNETIC DATA CORRECTIONS:
COMM -----
COMM Diurnal variations removed
COMM IGRF(2010) updated to 2012.23 removed
COMM Average survey base station value added to datum
COMM
COMM RADIOMETRIC CORRECTIONS AND COEFFICIENTS:
COMM -----
COMM Data has been corrected for aircraft and cosmic backgrounds.
COMM Height corrected to a constant datum of 30 metres,
COMM minimum height of 5 and a maximum of 300 metres.
COMM Data has also been corrected for radon using the method described by Minty
COMM and corrected for channel interaction.
COMM
COMM
COMM Tot.Count Potassium Uranium Thorium
COMM Arcft Bkg 26.6 10.37 0 0
COMM Cosmic Bkg 0.986 0.0514 0.041 0.0549
COMM Height Attn 0.007434 0.009432 0.008428 0.007510
COMM
COMM
COMM STRIPPING RATIOS:
COMM -----
COMM Alpha = 0.269, Beta = 0.404, Gamma = 0.758,
COMM a = 0.056, b = 0.004, g = -0.001
COMM
COMM Channel name Format Units Null Value
COMM -----
COMM Job code A5
COMM Line number A9
COMM Flight I5
COMM Flight date A9 YYYYMMDD
COMM fiducial f12.1 -999999.000000
COMM mga_east f11.2 METRES -99999.000000
COMM mga_north f11.2 METRES -99999.000000
COMM gda_lat f12.7 degrees -99.000000
COMM gda_long f13.7 degrees -999.000000
COMM rad_alt f8.2 METRES -999.000000
COMM gps_height f8.2 METRES -999.000000
COMM baro_pressure f8.2 hPa -999.000000
COMM temp_air_deg_c f5.1 DEGC -9.000000
COMM live_time f6.0 MSEC -9.000000
COMM raw_tot_cps f8.0 CPS -99.000000
COMM raw_pot_cps f7.0 CPS -99.000000
COMM raw_ura_cps f7.0 CPS -99.000000
COMM cosmicd_cps f5.0 CPS -999.000000
COMM fin_tot_cps f8.1 CPS -99.000000
COMM fin_pot_cps f7.1 CPS -99.000000
COMM fin_ura_cps f7.1 CPS -99.000000
COMM fin_th_cps f7.1 CPS -99.000000
COMM

```

```

DEFN ST=RECD,RT=COMM;RT:A4;COMMENTS:A80
DEFN 1 ST=RECD,RT=;BGSJOB:I5:NULL=999:NAME=BGS Job Code

```

```

DEFN 2 ST=RECD,RT=;LINE:A9:NULL=999999:NAME=line
DEFN 3 ST=RECD,RT=;FLIGHT:F5.0:NULL=999:NAME=flight
DEFN 4 ST=RECD,RT=;DATE:A9:NULL=999999:UNIT=YYYYMMDD
DEFN 5 ST=RECD,RT=;FIDUCIAL:f12.1:NULL=-999999.000000:NAME=FIDUCIAL
DEFN 6 ST=RECD,RT=;MGAEAST:f11.2:UNIT=METRES:NULL=-99999.000000:NAME=MGA_EAST
DEFN 7 ST=RECD,RT=;MGANORTH:f11.2:UNIT=METRES:NULL=-99999.000000:NAME=MGA_NORTH
DEFN 8 ST=RECD,RT=;GDA94LAT:f12.7:UNIT=degrees:NULL=-99.000000:NAME=GDA94LAT
DEFN 9 ST=RECD,RT=;GDA94LON:f13.7:UNIT=degrees:NULL=-999.000000:NAME=GDA94LON
DEFN 10 ST=RECD,RT=;RAD_ALT:f8.2:UNIT=METRES:NULL=-999.000000:NAME=RAD_ALT
DEFN 11 ST=RECD,RT=;GPS_HT:f8.2:UNIT=METRES:NULL=-999.000000:NAME=GPS_ALT
DEFN 12 ST=RECD,RT=;BAROPRES:f8.2:UNIT=hPa:NULL=-999.000000:NAME=PRESSURE
DEFN 13 ST=RECD,RT=;TEMP:f5.1:UNIT=DEGC:NULL=-9.000000:NAME=TEMP_DEG
DEFN 14 ST=RECD,RT=;LIVETIME:f6.0:UNIT=MSEC:NULL=-9.000000:NAME=LIVETIME
DEFN 15 ST=RECD,RT=;RAW_TOT:f8.0:UNIT=CPS:NULL=-99.000000:NAME=RAW_TC
DEFN 16 ST=RECD,RT=;RAW_POT:f7.0:UNIT=CPS:NULL=-99.000000:NAME=RAW_POT
DEFN 17 ST=RECD,RT=;RAW_URA:f7.0:UNIT=CPS:NULL=-99.000000:NAME=RAW_URA
DEFN 18 ST=RECD,RT=;COSMIC:f5.0:UNIT=CPS:NULL=-999.000000:NAME=COSMIC
DEFN 19 ST=RECD,RT=;FIN_TOT:f8.1:UNIT=CPS:NULL=-99.000000:NAME=FIN_TC
DEFN 20 ST=RECD,RT=;FIN_POT:f7.1:UNIT=CPS:NULL=-99.000000:NAME=FIN_POT
DEFN 21 ST=RECD,RT=;FIN_URA:f7.1:UNIT=CPS:NULL=-99.000000:NAME=FIN_URA
DEFN 22 ST=RECD,RT=;FIN_TH:f7.1:UNIT=CPS:NULL=-99.000000:NAME=FIN_TH
;END DEFN

```

6.3 Final 256 Radiometric Data

```

COMM
COMM Baigent Geosciences Pty. Ltd.
COMM -----
COMM
COMM LOCATED DATA
COMM -----
COMM Area : Blues Folly & Paradise Well
COMM Company Flown by: Daishsat Pty. Ltd.
COMM Company Flown for: Alistair Mackie
COMM Company Processed: Baigent Geosciences Pty. Ltd.
COMM
COMM AIRBORNE SURVEY EQUIPMENT:
COMM -----
COMM
COMM Aircraft : Robinson R44
COMM Magnetometer : Geometrics G822 Caesium Vapour
COMM Magnetometer Resolution : 0.001 nT
COMM Magnetometer Compensation : Post Flight
COMM Magnetometer Sample Interval : 20 Hz, Approx 2.1 metres
COMM Data Acquisition : GeoOZ Model 2009
COMM Spectrometer : Radiation Solutions RS 500
COMM Crystal Size : 16 lt downward array
COMM Spectrometer Sample Interval : 1.0 Seconds (approx 42 metres)
COMM GPS Navigation System : Novatel 951R GPS Receiver
COMM
COMM
COMM AIRBORNE SURVEY SPECIFICATIONS
COMM
COMM Blues Folly
COMM Flight Line Direction : 045 - 225 degrees
COMM Flight Line Separation : 100 metres
COMM Tie Line Direction : 135 - 315 degrees

```

```

COMM Tie Line Separation      :      1000 metres
COMM
COMM Paradise Well
COMM Flight Line Direction    :    135 - 315 degrees
COMM Flight Line Separation   :          100 metres
COMM Tie Line Direction       :    045 - 225 degrees
COMM Tie Line Separation      :          1000 metres
COMM Terrain Clearance        :          30 metres (MTC)
COMM
COMM
COMM Survey flown             :          May 2012
COMM
COMM
COMM
COMM Flight path calculated from GPS Data using a Novatel 951R GPS Receiver.
COMM
COMM
COMM Grid notation refers to GDA/MGA Zone 53
COMM
COMM
COMM MAGNETIC DATA CORRECTIONS:
COMM -----
COMM Diurnal variations removed
COMM IGRF(2010) updated to 2012.23 removed
COMM Average survey base station value added to datum
COMM
COMM RADIOMETRIC CORRECTIONS AND COEFFICIENTS:
COMM -----
COMM Data has been corrected for aircraft and cosmic backgrounds.
COMM Height corrected to a constant datum of 30 metres,
COMM minimum height of 5 and a maximum of 300 metres.
COMM Data has also been corrected for radon using the method described by Minty
COMM and corrected for channel interaction.
COMM
COMM
COMM          Tot.Count      Potassium      Uranium      Thorium
COMM Arcft Bkg          26.6          10.37          0          0
COMM Cosmic Bkg         0.986          0.0514          0.041          0.0549
COMM Height Attn        0.007434      0.009432      0.008428      0.007510
COMM
COMM
COMM STRIPPING RATIOS:
COMM -----
COMM Alpha = 0.269, Beta = 0.404, Gamma = 0.758,
COMM a = 0.056, b = 0.004, g = -0.001
COMM
COMM          Channel name          Format      Units      Null Value
COMM -----
COMM          Job code              A5
COMM          Line number            A9
COMM          Flight                  I5
COMM          Flight date             A9      YYYYMMDD
COMM          fiducial                f12.1      -999999.000000
COMM          mga_east                f11.2      METRES      -99999.000000
COMM          mga_north               f11.2      METRES      -99999.000000
COMM          gda_lat                 f12.6      degrees     -999.000000
COMM          gda_long                f11.6      degrees     -99.000000
COMM          rad_alt                 f8.2      METRES      -999.000000
COMM          gps_height               f8.2      METRES      -999.000000
COMM          baro_pressure            f8.2      hPa         -999.000000
COMM          temp_air_deg_c          f5.1      DEGC        -9.000000

```

```

COMM          live_time          f6.0    MSEC          -9.000000
COMM      raw 256 channel spectra    256i5    CPS          -9
COMM


```

```


DEFN      ST=RECD,RT=COMM;RT:A4;COMMENTS:A80
DEFN  1  ST=RECD,RT=;BGSJOB:I5:NULL=999:NAME=BGS Job Code
DEFN  2  ST=RECD,RT=;LINE:A9:NULL=999999:NAME=line
DEFN  3  ST=RECD,RT=;FLIGHT:F5.0:NULL=999:NAME=flight
DEFN  4  ST=RECD,RT=;DATE:A9:NULL=999999:UNIT=YYYYMMDD
DEFN  5  ST=RECD,RT=;FIDUCIAL:f12.1:NULL=-999999.000000:NAME=FIDUCIAL
DEFN  6  ST=RECD,RT=;MGAEAST:f11.2:UNIT=METRES:NULL=-99999.000000:NAME=MGA_EAST
DEFN  7  ST=RECD,RT=;MGANORTH:f11.2:UNIT=METRES:NULL=-99999.000000:NAME=MGA_NORTH
DEFN  8  ST=RECD,RT=;GDA94LAT:f11.6:UNIT=degrees:NULL=-99.000000:NAME=GDA94LAT
DEFN  9  ST=RECD,RT=;GDA94LNG:f12.6:UNIT=degrees:NULL=-999.000000:NAME=GDA94LNG
DEFN 10  ST=RECD,RT=;RAD_ALT:f8.2:UNIT=METRES:NULL=-999.000000:NAME=RAD_ALT
DEFN 11  ST=RECD,RT=;GPS_HT:f8.2:UNIT=METRES:NULL=-999.000000:NAME=GPS_ALT
DEFN 12  ST=RECD,RT=;BAROPRES:f8.2:UNIT=hPa:NULL=-999.000000:NAME=PRESSURE
DEFN 13  ST=RECD,RT=;TEMP:f5.1:UNIT=DEGC:NULL=-9.000000:NAME=TEMP_DEG
DEFN 14  ST=RECD,RT=;LIVETIME:f6.0:UNIT=MSEC:NULL=-9.000000:NAME=LIVETIME
DEFN 15  ST=RECD,RT=;SPEC256:256I5:UNIT=CPS:NULL=-9:NAME=Raw 256 channel
spectrometer
;END DEFN

```

7. Magnetic Data Processing Flow Chart

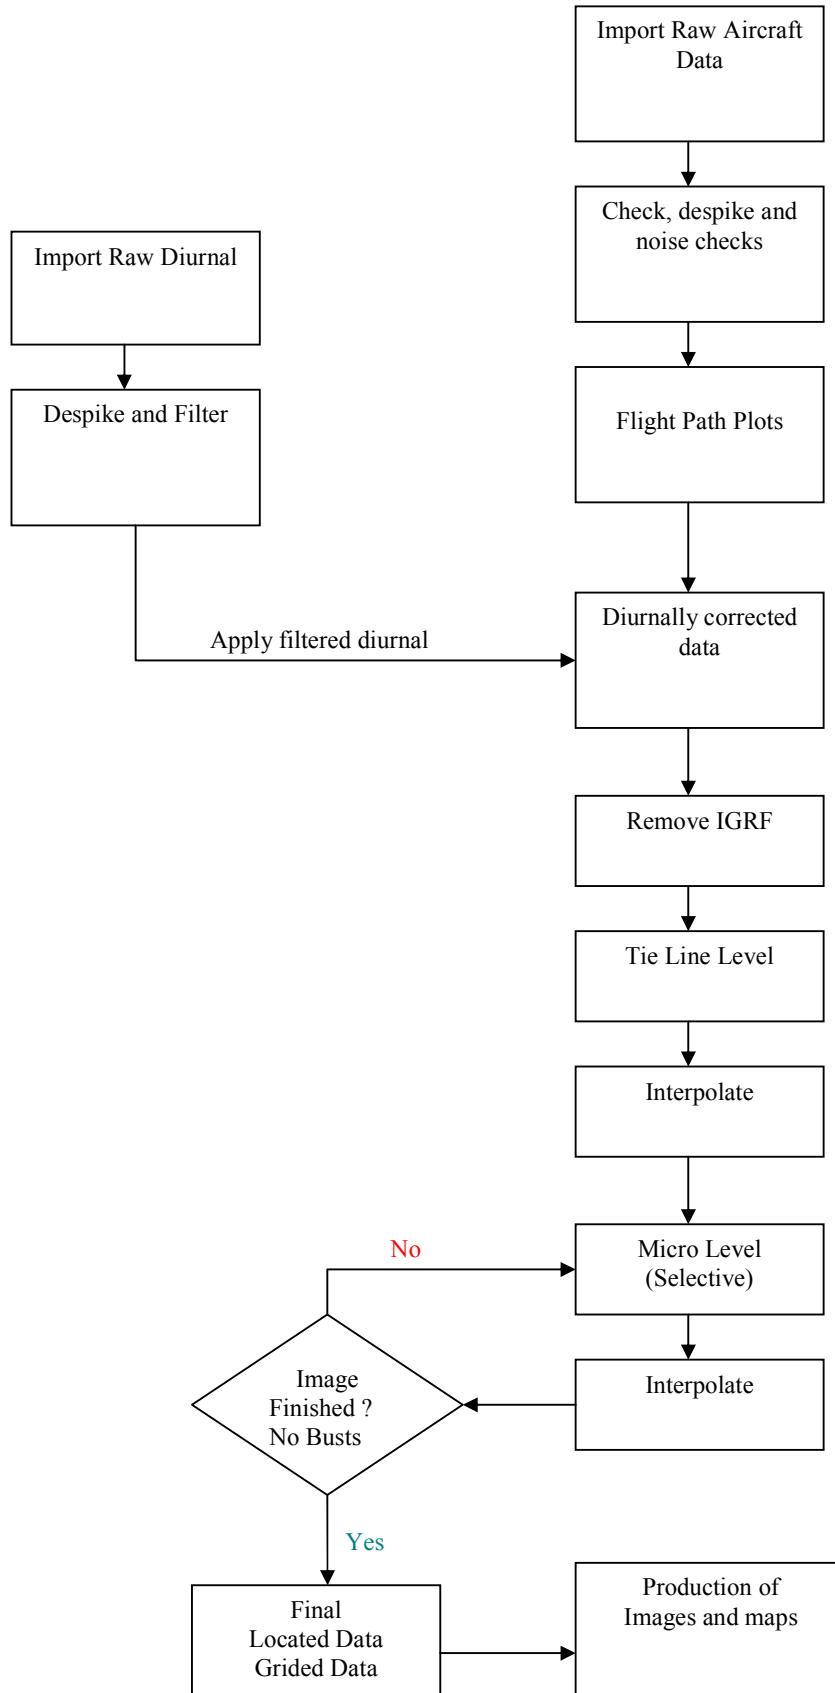

8. Elevation Data Processing Flow Chart

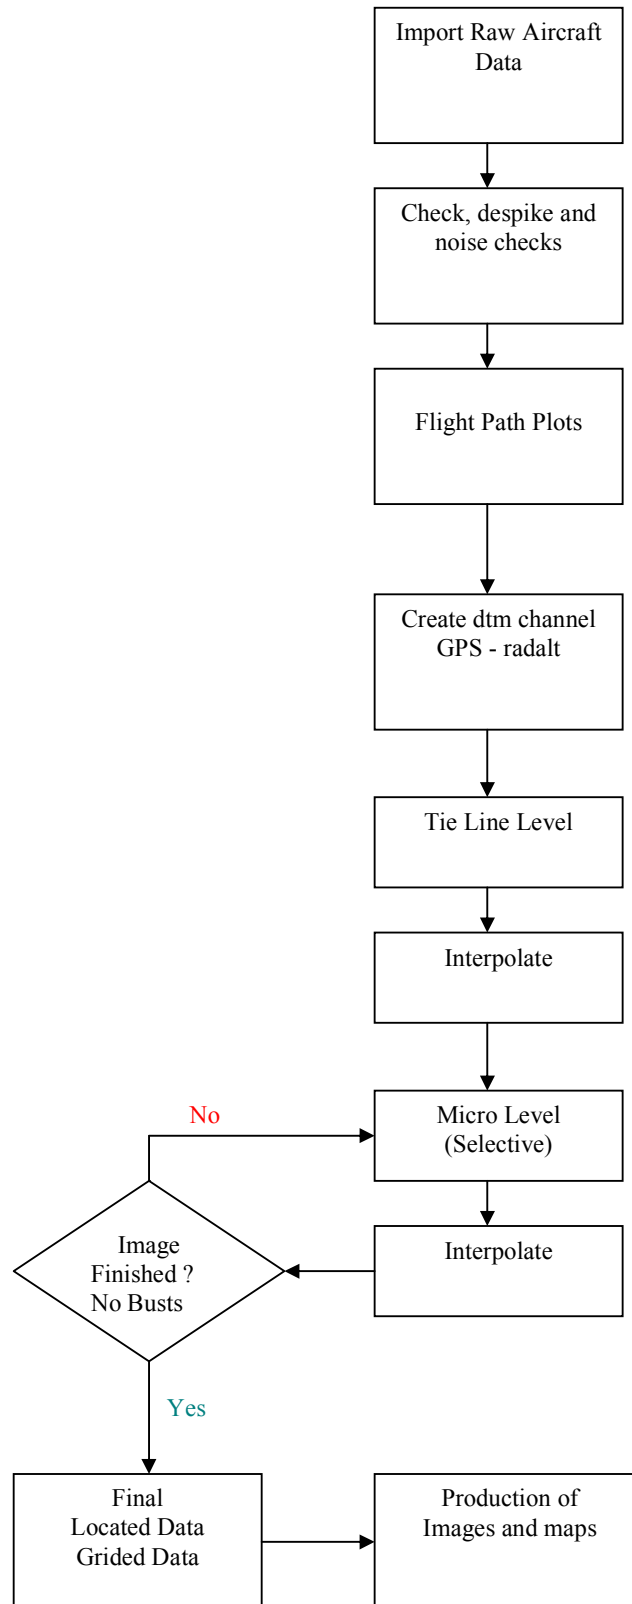

9. Radiometric Processing Flow Chart

